

RINEX

The Receiver Independent Exchange Format

Version 4.02

IGS/RTCM RINEX Committee Chair
Francesco.Gini@esa.int (Ed.)

1 October 2024

Acknowledgement: This version is thanks to the IGS, the RTCM/SC104
and all previous RINEX versions developed from 1989.

Table of Contents

1	RINEX 4.01 to 4.02 Changes	10
2	THE PHILOSOPHY AND HISTORY OF RINEX	11
3	GENERAL FORMAT DESCRIPTION.....	14
4	BASIC DEFINITIONS.....	15
4.1	Time	15
4.1.1	GPS Time	15
4.1.2	GLONASS Time	15
4.1.3	Galileo System Time	15
4.1.4	BeiDou Time	16
4.1.5	QZSS Time.....	16
4.1.6	NavIC System Time	16
4.1.7	GNSS Time Relationships.....	16
4.1.8	GNSS Week numbers.....	18
4.2	Pseudorange	18
4.3	Phase	19
4.4	Doppler	20
4.5	Satellite numbers	20
5	RINEX VERSION 3 and 4 FEATURES.....	22
5.1	Long Filenames	22
5.2	Observation File Header	22
5.2.1	Order of the header records	22
5.2.2	Date/Time format in the PGM / RUN BY / DATE header record.....	23
5.2.3	Marker type	23
5.2.4	Antenna references, phase centers.....	24
5.2.5	Antenna phase center header record.....	25
5.2.6	Antenna orientation	25
5.2.7	Information about receivers on a vehicle	25
5.2.8	Time of First/Last Observations	25
5.2.9	Corrections of differential code biases (DCBs)	26
5.2.10	Corrections of antenna phase center variations (PCVs).....	26
5.2.11	Scale factor	26
5.2.12	Phase Cycle Shifts	26

5.2.13	Half-wavelength observations, half-cycle ambiguities	26
5.2.14	Receiver clock offset.....	27
5.2.15	Satellite system-dependent list of observables	27
5.2.16	GLONASS Code-Phase Alignment Header Record	27
5.2.17	Observation codes	27
5.3	Observation Data Records	35
5.3.1	Order of Data records	36
5.3.2	Event flag records.....	36
5.3.3	RINEX observation data records for GEO & SBAS satellites.....	36
5.3.4	Channel numbers as pseudo-observables	36
5.4	RINEX Navigation Messages.....	37
5.4.1	Navigation Data Record Header Line	37
5.4.2	EPH Navigation messages for GPS (LNAV, CNAV, CNV2)	40
5.4.3	EPH Navigation messages for Galileo (INAV, FNAV).....	40
5.4.4	EPH Navigation message for GLONASS (FDMA, L1OC, L3OC).....	41
5.4.5	EPH Navigation messages for QZSS (LNAV, CNAV, CNV2).....	41
5.4.6	EPH Navigation messages for BDS (D1/D2, CNV1, CNV2, CNV3)	41
5.4.7	EPH Navigation message for SBAS satellites (SBAS).....	41
5.4.8	EPH Navigation messages for NavIC (LNAV, L1NV)	42
5.4.9	STO Messages for System Time and UTC Offset	43
5.4.10	EOP Messages for Earth Orientation Parameters.....	46
5.4.11	ION Messages for Ionosphere Model Parameters.....	46
6	RINEX FORMATTING CLARIFICATIONS	47
6.1	Versions	47
6.2	Leading blanks in CHARACTER fields.....	47
6.3	Variable-length records.....	47
6.4	Spare Fields	47
6.5	Missing items, duration of the validity of values	47
6.6	Unknown / Undefined observation types and header records	47
6.7	Floating point numbers in Observation data records	47
6.7.1	Loss of lock indicator (LLI)	48
6.7.2	Signal Strength Indicator (SSI)	48
6.8	Floating point numbers in Navigation data records.....	49
6.9	Units in Navigation data records	49

6.10	Navigation data stored bitwise	49
6.11	Navigation message transmission time	50
6.12	Merged Navigation files.....	50
7	REFERENCES	51
8	APPENDIX: RINEX FORMAT DEFINITIONS AND EXAMPLES	54
8.1	RINEX Long Filenames	54
8.2	GNSS Observation Data Files	59
8.3	GNSS Navigation Message Files.....	74
8.3.1	Navigation File Header	74
8.3.2	GPS LNAV Navigation Message	77
8.3.3	GPS CNAV Navigation Message.....	79
8.3.4	GPS CNAV-2 Navigation Message	81
8.3.5	GALILEO INAV/FNAV Navigation Message	83
8.3.6	GLONASS FDMA Navigation Message	86
8.3.7	GLONASS L1OC CDMA Navigation Message.....	88
8.3.8	GLONASS L3OC CDMA Navigation Message.....	89
8.3.9	QZSS LNAV Navigation Message	92
8.3.10	QZSS CNAV Navigation Message	94
8.3.11	QZSS CNAV-2 Navigation Message.....	96
8.3.12	BEIDOU D1/D2 Navigation Message	98
8.3.13	BEIDOU CNAV-1 Navigation Message	100
8.3.14	BEIDOU CNAV-2 Navigation Message	102
8.3.15	BEIDOU CNAV-3 Navigation Message	104
8.3.16	SBAS Navigation Message Record.....	107
8.3.17	NavIC LNAV Navigation Message	109
8.3.18	NavIC L1NV Navigation Message	111
8.4	STO, EOP and ION Navigation File Messages	114
8.4.1	System Time Offset (STO) Message.....	114
8.4.2	Earth Orientation Parameter (EOP) Message.....	115
8.4.3	Ionosphere (ION) Klobuchar Model Message	116
8.4.4	Ionosphere (ION) NEQUICK-G Model Message.....	117
8.4.5	Ionosphere (ION) BDGIM Model Message.....	118
8.4.6	Ionosphere (ION) NavIC L1NV Klobuchar Model Message	119
8.4.7	Ionosphere (ION) NavIC L1NV NEQUICK-N Model Message.....	120

8.4.8	Ionosphere (ION) GLONASS CDMA Model Message.....	121
8.4.9	STO, EOP, ION - Examples.....	122
8.5	Meteorological Data File	124
8.6	Reference Phase Alignment by Constellation and Frequency Band	127

Table of Tables

Table 1 : Constellation Time Relationships.....	17
Table 2 : GPS and BeiDou UTC Leap Second Relationship.....	17
Table 3 : Week Numbers between RINEX and GPS, QZSS, IRN, GST, GAL, BDS	18
Table 4 : Constellation Pseudorange Corrections	19
Table 5: Observation Corrections for Receiver Clock Offset.....	20
Table 6: QZSS PRN to RINEX Satellite Identifier	21
Table 7: Examples of long filenames for RINEX 3 data files	22
Table 8: Predefined Marker Type Keywords.....	23
Table 9 : Observation Code Components	28
Table 10 : RINEX Version 4.02 GPS Observation Codes.....	29
Table 11 : RINEX Version 4.02 GLONASS Observation Codes	30
Table 12 : RINEX Version 4.02 Galileo Observation Codes	31
Table 13 : RINEX Version 4.02 SBAS Observation Codes	31
Table 14 : RINEX Version 4.02 QZSS Observation Codes	32
Table 15 : RINEX Version 4.02 BDS Observation Codes	33
Table 16 : RINEX Version 4.02 NavIC Observation Codes	34
Table 17 : Example Observation Type Records	35
Table 18 : Example RINEX Observation Record.....	35
Table 19: Navigation Data Record Types.....	37
Table 20: EPH Navigation Message Types	38
Table 21: STO, EOP, ION Navigation Message Types.....	38
Table 22: EPH Navigation Message Subtypes	39
Table 23: STO Navigation Message Subtypes	39
Table 24: EOP Navigation Message Subtypes	39
Table 25: ION Navigation Message Subtypes	39
Table 26: Navigation Message System Time Offset labels	43
Table 27: Navigation Message System Time UTC indicator	43
Table 28: Time Offset Parameters per GNSS and per Navigation Message	44
Table 29 : Standardized SNR Indicators.....	49
Table A1 : RINEX Filename Description.....	55
Table A2 : GNSS Observation Data File – Header Section Description.....	59
Table A3 : GNSS Observation Data File – Data Record Description	68

Table A4 : GNSS Observation Data File – Example #1	69
Table A5 : GNSS Observation Data File – Example #2.....	71
Table A6 : GNSS Observation Data File – Example #3.....	73
Table A7 : GNSS Navigation Message File – Header Section Description	74
Table A8 : GNSS Navigation Message File Header – Examples	76
Table A9 : GPS LNAV Navigation Message Record Description	77
Table A10 : GPS CNAV Navigation Message Record Description	79
Table A11 : GPS CNAV-2 Navigation Message Record Description	81
Table A12 : GPS Navigation Messages - Example	82
Table A13 : GALILEO INAV/FNAV Navigation Message Record Description	83
Table A14 : GALILEO Navigation Messages - Examples.....	85
Table A15 : GLONASS FDMA Navigation Message Record Description	86
Table A16 : GLONASS L1OC CDMA Navigation Message Record Description	88
Table A17 : GLONASS L3OC CDMA Navigation Message Record Description	89
Table A18 : GLONASS Navigation Message Files - Example	90
Table A19 : QZSS LNAV Navigation Message Record Description.....	92
Table A20 : QZSS CNAV Navigation Message Record Description	94
Table A21 : QZSS CNAV-2 Navigation Message Record Description	96
Table A22 : QZSS Navigation Message File - Examples.....	97
Table A23 : BEIDOU D1/D2 Navigation Message Record Description	98
Table A24 : BEIDOU CNAV-1 Navigation Message Record Description.....	100
Table A25 : BEIDOU CNAV-2 Navigation Message Record Description.....	102
Table A26 : BEIDOU CNAV-3 Navigation Message Record Description.....	104
Table A27 : BEIDOU Navigation Messages - Examples	106
Table A28 : SBAS Navigation Message Record Description	107
Table A29 : SBAS Navigation Message - Example	108
Table A30 : NavIC LNAV Navigation Message Record Description.....	109
Table A31 : NavIC L1NV Navigation Message Record Description.....	111
Table A32 : NavIC LNAV and L1NV Navigation Messages – Example	112
Table A33 : System Time Offset (STO) Message Record Description	114
Table A34 : Earth Orientation Parameter (EOP) Message Record Description	115
Table A35 : Ionosphere (ION) Klobuchar Model Message Record Description	116
Table A36 : Ionosphere (ION) NEQUICK-G Model Message Record Description	117
Table A37 : Ionosphere (ION) BDGIM Model Message Record Description	118

Table A38 : Ionosphere (ION) NavIC L1NV Klobuchar Model Message Record Description	119
Table A39 : Ionosphere (ION) NavIC L1NV NeQuick-N Model Message Record Description	120
Table A40 : Ionosphere (ION) GLONASS CDMA Model Message Record Description	121
Table A41 : STO, EOP, ION Messages - Examples.....	122
Table A42 : Meteorological Data File – Header Section Description	124
Table A43 : Meteorological Data File – Data Record Description	126
Table A44 : Meteorological Data File – Example	126
Table A45 : Reference Phase Alignment by Frequency Band	127

Acronyms

AODC	Age of Data Clock
AODE	Age of Data Ephemerides
APREF	Asia Pacific Reference Frame
ARP	Antenna Reference Point
AS	Anti-Spoofing (of GPS)
BDS	BeiDou System
BDT	BeiDou Time
BIPM	International Bureau of Weights and Measures (from French)
BNK	Blank if Not Known/Not Defined
BOC	Binary Offset Carrier
CNAV	Civil Navigation (message)
DCB	Differential Code Bias
DVS	Data Validity Status
EUREF	European Reference Frame
FNAV	Free Navigation (message, of Galileo)
GEO	Geostationary Earth Orbit
GLONASS	Globalnaya Navigatsionnaya Sputnikovaya Sistema
GNSS	Global Navigation Satellite System
GPS	Global Positioning System
GST	Galileo System Time
ICD	Interface Control Document
IGSO	Inclined Geo-Synchronous Orbit
INAV	Integrity Navigation (message, of Galileo)
IOD	Issue of Data
IODC	Issue of Data, Clock
IODE	Issue of Data, Ephemerides
IRNSS	Indian Regional Navigation Sat. System (former name for NavIC)
ISC	Inter-Signal Correction
LLI	Loss-of-Lock Indicator
LNAV	Legacy Navigation (message)
MBOC	Multiplexed BOC
MEO	Medium Earth Orbit
NavIC	Navigation Indian Constellation (final name for the Indian Regional Navigation Sat. System)
NICT	National Institute of Information and Communications Technology (Japan)
PCV	Phase Center Variation
PR	Pseudorange
PRN	Pseudo-Random Noise
QZSS	Quasi-Zenith Satellite System
RCV	Receiver
RINEX	Receiver INdependent EXchange format
RMP	Regional Military Protection
S/C	Spacecraft
SA	Selective Availability (of GPS)
SAASM	Selective Availability Anti-Spoofing Module

SBAS	Satellite Based Augmentation System
SIRGAS	Sistema de Referencia Geocéntrico para las Américas
SISAI	Signal-in-Space Accuracy Index
SISMAI	Signal-in-Space Monitoring Accuracy Index
SISRE	Signal-in-Space Range Error
SNR	Signal-to-Noise Ratio
SSI	Signal Strength Indicator
SU	Soviet Union
SV	Space Vehicle
TGD	Timing Group Delay
TOE	Time of Ephemerides
TOW	Time of Week
URA	User Range Accuracy
URAI	User Range Accuracy Index
USNO	United States Naval Observatory
UTC	Universal Time Coordinated

1 RINEX 4.01 TO 4.02 CHANGES

The table below contains the changes between the current and the previous RINEX format document versions.

10 July 2023	RINEX 4.01 Released
Jul 2023	<ul style="list-style-type: none"> - Updated the Galileo System Time definition in sections 4.1.3 and 5.4.9, in-line with the latest Galileo OS SDD. - Added ‘s’ to the STO Message Satellite System designator in Table A33 - Removed UTC (BIPM) from Table 27, as directed by BIPM. - Added “Must be aligned to L2S” in Table A45 for the L2 QZSS reference phase alignment.
Sep 2023	<ul style="list-style-type: none"> - Added NavIC L1 Navigation message (L1NV) in Table A31 in section 8.3.18 - Added NavIC ‘L1NV’ option to the STO, and EOP definition tables; Table A33, and Table A34 and the examples. - Added two new NavIC ION L1NV messages in Table A38 and Table A39 and examples.
Oct 2023	<ul style="list-style-type: none"> - Added “Alert flag”, “Integrity Status flag” and “L2C Phasing flag” as optional content to the GPS/QZSS CNAV/CNAV-2 Navigation messages in Table A10, Table A11, Table A20, Table A21.
Feb 2024	<ul style="list-style-type: none"> - Updated the Epoch time tagging in Observation files to allow for extra second digits to allow pico-sec resolution in Table A3. - Clarified that the Epoch record in Observation files can contain the “Receiver clock offset estimate” (rather than correction) in Table A3, and in the paragraph below Table A4.
Mar 2024	<ul style="list-style-type: none"> - Added GLONASS L1OC, and L3OC CDMA Navigation message definitions; Table A16, Table A17, and in the examples (Table A18) - Added GLONASS ‘LXOC’ to the STO, EOP message records (Table A33, Table A34) for the new L1/L3 CDMA Navigation messages and in the examples in Table A41. - Added GLONASS ‘LXOC’ ION new message definition table; Table A40 for the new L1 and L3 CDMA Navigation messages and in the examples in Table A41.
Jun 2024	<ul style="list-style-type: none"> - Updated document references in section 7 - Added acknowledgements to section 2 to the previous RINEX Chairs that coordinated the creation of Versions 3 and 4.
Sep 2024	<ul style="list-style-type: none"> - Added navigation message subtypes for all navigation record message types; Table 22, Table 23, Table 24, Table 25. - Additional corrections and clarifications. - Added the subtypes for the QZSS ION messages in Table A35. - Added the subtypes for the NavIC ION messages in Table A38.
1 Oct 2024	RINEX 4.02 Released

2 THE PHILOSOPHY AND HISTORY OF RINEX

The first proposal for the ***Receiver Independent Exchange Format***; **RINEX** was developed by the Astronomical Institute of the University of Bern for the easy exchange of the Global Positioning System (GPS) data to be collected during the first large European GPS campaign EUREF 89, which involved more than 60 GPS receivers of 4 different manufacturers. The governing aspect during the development was the following fact:

Most geodetic processing software for GNSS data use a well-defined set of observables:

- The **carrier-phase measurement** at one or both carriers, being a measurement on the beat frequency between the received carrier of the satellite signal and a receiver-generated reference frequency.
- The **pseudorange (code) measurement**, equivalent to the difference of the time of reception (expressed in the time frame of the receiver) and the time of transmission (expressed in the time frame of the satellite) of a distinct satellite signal.
- The **doppler measurement**, the difference between the observed and emitted frequency of the carrier.
- The **signal-to-noise ratio (SNR) measurement**, the carrier to noise density ratio (C/N0) or the ratio of the received signal power to the noise power.
- The **observation time**, the reading of the receiver clock at the instant of validity of the measurements.

Usually, geodetic processing software assumes that the observation time in RINEX is valid for **all** measurements, **and** for all satellites observed.

Consequently, all these programs do not need most of the information that is usually stored by the receivers: they need as a minimum phase, code, and time in the above-mentioned definitions, and some station-related information like station name, antenna height, antenna model, etc.

Four major format versions of RINEX have been developed and published to date:

- The original RINEX Version 1 presented at and accepted by the 5th International Geodetic Symposium on Satellite Positioning in Las Cruces, 1989. [Gurtner et al., 1989], [Evans, 1989]
- RINEX Version 2 presented at and accepted by the Second International Symposium of Precise Positioning with the Global Positioning System in Ottawa, 1990, mainly adding the possibility to include tracking data from different satellite systems (GLONASS, SBAS). [Gurtner and Mader, 1990a, 1990b], [Gurtner, 1994]
- RINEX Version 3 developed in the early 2000s to support multi-GNSS and to clearly identified the tracking modes of each of the observations by introducing and defining 3-character observation codes for all GNSS constellations. Thanks to Ken MacLeod, RINEX Chair (2011-2019) for all his efforts in coordinating the creation of RINEX Version 3.
- RINEX Version 4 introduced in 2021 as a necessary step to support the modern multi-GNSS navigation messages by introducing and defining navigation ‘data records’ to hold both individual satellite navigation messages, constellation-wide parameters and global parameters as transmitted by the different GNSS constellations. Thanks to Dr.

Ignacio Romero, RINEX Chair (2020-2023) for all his efforts in coordinating the creation of RINEX Version 4.

Several subversions of RINEX Version 2 were defined over time:

- Version 2.10: Among other minor changes, allowing for sampling rates other than integer seconds and including raw signal strengths as new observables. [Gurtner, 2002]
- Version 2.11: Includes the definition of a two-character observation code for L2C pseudoranges and some modifications in the GEO NAV MESS files. [Gurtner and Estey, 2005] - **This was the last official RINEX Version 2**
- Version 2.20: Unofficial version used for the exchange of tracking data from spaceborne receivers within the IGS LEO pilot project. [Gurtner and Estey, 2002]

In the early 2000s when new GNSS constellations were being planned, and soon thereafter started transmitting their new navigation signals, it was clear that RINEX 2 was not capable of fully supporting the new signals, tracking modes and satellites efficiently. The new BeiDou, Galileo, QZSS, etc. and the modernized GPS and GLONASS with new frequencies and observation types needed a leap in the RINEX format.

Especially the possibility to track frequencies on different channels, required a more flexible and more detailed definition of the observation codes.

Several versions of RINEX 3 have been defined:

- RINEX 3.00 (2007) fully supports multi-GNSS observation data storage. The initial RINEX Version 3 also incorporates the version 2.20 definitions for space-borne receivers.
- RINEX 3.01 (2009) introduced the requirement to generate consistent phase observations across different tracking modes or channels, i.e. to apply $\frac{1}{4}$ -cycle shifts prior to RINEX file generation, if necessary, to facilitate the processing of such data.
- RINEX 3.02 (2013) added support for the Japanese, Quasi Zenith Satellite System (QZSS), additional information concerning BeiDou (based on the released ICD) and a new message to enumerate GLONASS code phase biases.
- RINEX 3.03 (2015) adds support for the NavIC (formerly IRNSS) and clarifies several implementation issues in 3.02. RINEX 3.03 also changes the BeiDou B1 signal convention back to the 3.01 convention where all B1 signals are identified as C2x (not C1 as in RINEX 3.02). Another issue with the implementation of 3.02 was the GPS navigation message fit interval field. Some implementations wrote the flag and others wrote a time interval. This release specifies that the fit interval should be a time period for GPS and a flag for QZSS. The Galileo Navigation section was updated to clarify the Issue of Data (IOD). RINEX 3.03 was also modified to specify that only known observation tracking modes can be encoded in the standard.
- RINEX 3.04 (2018) adds clarifications for signal tables for GLONASS, QZSS and BeiDou, and a small number of edits and corrections needed from the previous version
- RINEX 3.05 (2020) is a major restructure and revision of the format document to make it clearer and easier to read, it adds BeiDou signals and tracking codes to fully support BDS-2 and BDS-3, and it also adds missing flags and values to the GLONASS navigation messages. **This was the last of the RINEX version 3 format series.**

- RINEX 4.00 is launched in 2021 as the results of the RINEX Working Group Navigation Taskforce discussions during the first half of 2021. The work built upon the effort over years from the DLR/GSOC group led by Dr O. Montenbruck to modernize the GNSS Navigation message format.
- RINEX 4.01 is produced in 2023 to correct some minor erratas in the previous format document, add some necessary clarifications and add new observations codes for upcoming GPS satellites, and for L1 NavIC signals.
- RINEX 4.02 is created in 2024 to clarify minor issues, to add NavIC L1 navigation message, add the GLONASS L1OC/L3OC navigation messages, add message subtypes to accommodate the QZSS and NavIC ION regional coefficient messages, and to define an optional extension to the Epoch second field in the Observation files down to the picosecond.

3 GENERAL FORMAT DESCRIPTION

The RINEX 4 format consists of three ASCII file types:

1. Observation data file
2. Navigation message file
3. Meteorological data file

Each file type consists of a header section and a data section. The header section contains global information for the entire file and is placed at the beginning of the file. The header section contains **header labels in columns 61-80** for each line. These labels are mandatory and must appear exactly as given in these descriptions and examples. The header does not have a fixed length and many of the labels are optional depending on the application. Comments can be added freely in the header.

The format has been optimized for minimum space requirements independent from the number of different observation types of a specific receiver or satellite system by indicating in the header the types of observations to be stored for this observation session, and the satellite systems having been observed. In computer systems allowing variable record lengths, the observation records may be kept as short as possible. Trailing blanks can be removed from the records. There is no maximum record length limitation for the observation records.

Each Observation file and each Meteorological Data file basically contain the data from one site and one session. Although the format allows for the insertion of certain header records into the data section, it is not recommended to concatenate data from more than one receiver (or antenna) into the same file, even if the data do not overlap in time.

If data from more than one receiver need to be exchanged, it would not be economical to include the identical satellite navigation messages collected by the different receivers several times. Therefore, the navigation message file from one receiver may be exchanged or a composite navigation message file created, containing non-redundant information from several receivers to make the most complete file.

RINEX 4 mixed navigation message files are expected to contain navigation messages of all tracked navigation satellite systems, to make the exchange and processing of navigation data more efficient.

The header and data record format descriptions as well as examples for each file type are given in the Appendix Tables of Section 8 at the end of the document.

4 BASIC DEFINITIONS

GNSS observables include three fundamental quantities that need to be defined: Time, Phase, and Range.

4.1 Time

The time of the measurement is the receiver time of the received signals. The time of the measurement is considered identical for all of them (phase, pseudorange, etc) and considered identical for all satellites observed at that epoch.

For single-system data files, the time of measurement is by default expressed in the system time of the respective satellite system.

For mixed files, the actual system time used **must** be indicated in the **TIME OF FIRST OBS** header record (Table A2). The details of each GNSS Time and their use in RINEX is defined below.

Each GNSS maintains a system time that is distinct from any particular UTC reference but is steered or linked to some such reference as designated by the respective ICDs. The details of each GNSS system time and their use in RINEX is defined below.

4.1.1 GPS Time

GPS time is steered to UTC(USNO), i.e. the local realization of UTC maintained by the United States Naval Observatory (USNO). But it is a continuous time scale, i.e. it does not insert any leap seconds. GPS time is usually expressed in GPS weeks and GPS seconds past 00:00:00 (midnight) Saturday/Sunday. GPS time started with week zero at 00:00:00 UTC (midnight) on January 6, 1980.

The GPS week is transmitted by the satellites as a 10-bit number. It has a roll-over after week 1023. The first roll-over happened on August 22, 1999, 00:00:00 GPS time.

In order to avoid ambiguities, the GPS week reported in the RINEX navigation message files is a continuous number without roll-over, i.e. ...1023, 1024, 1025, ...

RINEX uses **GPS** as system time identifier for the reported GPS time.

4.1.2 GLONASS Time

GLONASS time is basically running on UTC(SU) (or, more precisely, GLONASS system time linked to UTC(SU)), i.e. the time tags are given in UTC and not GPS time. It is not a continuous time, i.e. it introduces the same leap seconds as UTC.

The reported GLONASS time has the same hours as UTC and not UTC+3 h as the original GLONASS System Time.

RINEX uses **GLO** as system time identifier for the reported GLONASS time.

4.1.3 Galileo System Time

Galileo runs on Galileo System Time (GST), which is steered to a prediction of UTC based on UTC realisations available at a minimum of 5 European metrological institutes, by the Galileo Time Service Provider (Galileo OS SDD, section 1.6.5.2). Apart from small differences (tens of nanoseconds), GST is nearly identical to GPS Time in that:

- The Galileo week starts at midnight Saturday/Sunday at the same second as the GPS week
- The GST week as transmitted by the satellites is a 12-bit value with a roll-over after week 4095. The GST week started at zero at the first roll-over of the broadcast GPS week after 1023, i.e. at Sun, 22-Aug-1999 00:00:00 GPS time

In order to remove possible misunderstandings and ambiguities, the Galileo week reported in the RINEX navigation message files is a continuous number without roll-over, i.e., ...4095, 4096, 4097,... and *it is aligned to the GPS week*.

RINEX uses **GAL** as system time identifier for the reported Galileo time.

4.1.4 BeiDou Time

The **BDS** Time (BDT) System is a continuous timekeeping system which is steered to UTC(NTSC). BDT zero time started at 00:00:00 UTC on January 1st, 2006 (GPS week 1356) therefore BDT is 14 seconds behind GPS time. BDT is synchronized with UTC within 100 nanoseconds (modulo 1 second).

- The **BDT** week starts at midnight Saturday/Sunday
- The **BDT** week is transmitted by the satellites as a 13-bit number. It has a roll-over after week 8191. In order to avoid ambiguities, the BDT week reported in the RINEX navigation message files is a continuous number without roll-over, i.e. ...8191, 8192, 8193, ...

RINEX uses **BDT** as system time identifier for the reported BDS time.

4.1.5 QZSS Time

QZSS runs on QZSS time, which is steered to UTC(NICT), i.e. the local realization of UTC maintained by the Japan National Institute of Information and Communications Technology (NICT). QZSS time is aligned with GPS time (offset from TAI by integer seconds); the QZSS week number is defined with respect to the GPS week.

RINEX uses **QZS** as a system time identifier for the reported QZSS time.

4.1.6 NavIC System Time

NavIC runs on Indian Regional Navigation Satellite System Time (**IRNSST**) which is steered to UTC(NPLI). The **IRNSST** start epoch is 00:00:00 on Sunday August 22nd, 1999, which corresponds to August 21st, 1999, 23:59:47 UTC (same time as the first GPS week roll over). Seconds of week are counted from 00:00:00 **IRNSST** hours Saturday/Sunday midnight which also corresponds to the start of the GPS week. Week numbers are consecutive from the start time and will roll over after week 1023 (at the same time as GPS and QZSS roll over).

RINEX uses **TRN** as the system time identifier for the reported NavIC time.

4.1.7 GNSS Time Relationships

Apart from the small, sub-microsecond differences, in the realizations of the different system times, the GNSS time scales differ from UTC and each other by integer seconds. The relations between the various systems are summarized in Table 1 and Table 2.

In order to have the current number of leap seconds available, we recommend including Δt_{LS} by adding a **LEAP SECOND** header line into the RINEX Observation file header (see Table A2).

The **LEAP SECOND** header line is now compulsory in the RINEX Navigation file header (see Table A7).

In a multi-GNSS RINEX file (GPS/GLONASS/Galileo/QZSS/BDS/NavIC) all pseudorange observations must refer to one receiver clock only.

Table 1 : Constellation Time Relationships

GLO	=	UTC	=	GPS	-	Δt_{LS}
GPS	=	GAL	=	UTC	+	Δt_{LS}
GPS	=	QZS	=	UTC	+	Δt_{LS}
GPS	=	IRN	=	UTC	+	Δt_{LS}
BDT	=			UTC	+	$\Delta t_{LS_{BDS}}$

Table 2 : GPS and BeiDou UTC Leap Second Relationship

Δt_{LS}	=	Delta time between GPS and UTC due to leap seconds, as transmitted by the GPS satellites in the almanac;
		1999-01-01 - 2006-01-01: $\Delta t_{LS} = 13$ seconds
		2006-01-01 - 2009-01-01: $\Delta t_{LS} = 14$ seconds
		2009-01-01 - 2012-07-01: $\Delta t_{LS} = 15$ seconds
		2012-07-01 - 2015-07-01: $\Delta t_{LS} = 16$ seconds
		2015-07-01 - 2017-01-01: $\Delta t_{LS} = 17$ seconds
		2017-01-01 - ????: $\Delta t_{LS} = 18$ seconds
$\Delta t_{LS_{BDS}}$	=	Delta time between BDT and UTC due to leap seconds, as transmitted by the BDS satellites in the almanac. $\Delta t_{LS_{BDS}} = \Delta t_{LS} - 14$ seconds
		2006-01-01 - 2009-01-01: $\Delta t_{LS_{BDS}} = 0$ seconds
		2009-01-01 - 2012-07-01: $\Delta t_{LS_{BDS}} = 1$ seconds
		2012-07-01 - 2015-07-01: $\Delta t_{LS_{BDS}} = 2$ seconds
		2015-07-01 - 2017-00-01: $\Delta t_{LS_{BDS}} = 3$ seconds
		2017-01-01 - ????: $\Delta t_{LS_{BDS}} = 4$ seconds

Unknown biases will have to be solved for during the post processing.

The small differences (modulo 1 second) between: BDS system time, Galileo system time, GLONASS system time, UTC(SU), UTC(USNO) and GPS system time have to be dealt with during the post-processing and not before the RINEX conversion. It may also be necessary to solve for remaining differences during the post-processing.

4.1.8 GNSS Week numbers

The use of the week number from the start of a GNSS service is a common time reference. The relationships between the different GNSS week numbers are as shown in Table 3.

Table 3 : Week Numbers between RINEX and GPS, QZSS, IRN, GST, GAL, BDS

Constellation /Archival Time Representation	GPS Ephemeris Week Period #1	GPS Ephemeris Week Period #2	GPS Ephemeris Week Period #3	GPS Ephemeris Week Period #4	GPS Ephemeris Week Period #5	GPS Ephemeris Week Period #6
GPS Broadcast	0 – 1023	0 – 1023	0 – 1023	0 – 1023	0 – 1023	0 – 1023
QZSS Broadcast		0 – 1023	0 – 1023	0 – 1023	0 – 1023	0 – 1023
NavIC Broadcast		0 – 1023	0 – 1023	0 – 1023	0 – 1023	0 – 1023
GST Broadcast		0 – 1023	1024 – 2047	2048 – 3071	3072 – 4095	0 – 1023
BDS Broadcast and RINEX		0(RINEX Week 1356) – 691	692 – 1715	1716 – 2739	2740 – 3763	3764 – 4787
GPS/QZS/IRN/GAL RINEX	0 – 1023	1024 – 2047	2048 – 3071	3072 – 4095	4096 – 5119	5120 -6143

4.2 Pseudorange

The pseudorange (PR) is the distance from the receiver antenna to the satellite antenna including receiver and satellite clock offsets (and other biases, such as atmospheric delays):

$$\text{PR} = \text{distance} + c * (\text{receiver clock offset} - \text{satellite clock offset}) + \text{other biases}$$

so that the pseudorange reflects the actual behavior of the receiver and satellite clocks. The pseudorange is stored in units of meters. In the above relation, $c = 299\,792\,458\text{ m/s}$ denotes the speed of light.

In a mixed-mode GPS/GLONASS/Galileo/QZSS/BDS receiver all pseudorange observations must refer to one receiver clock only. RINEX pseudoranges must be corrected depending on the receiver tracking time, as shown in Table 4, to remove the contributions of the leap seconds from the pseudo-ranges.

Table 4 : Constellation Pseudorange Corrections

PR_mod(GPS)	=	PR(GPS)	+	$c * \Delta t_{LS}$	if generated with a receiver clock running in the GLONASS time frame
PR_mod(GAL)	=	PR(GAL)	+	$c * \Delta t_{LS}$	if generated with a receiver clock running in the GLONASS time frame
PR_mod(BDT)	=	PR(BDT)	+	$c * \Delta t_{LS_{BDS}}$	if generated with a receiver clock running in the GLONASS time frame
PR_mod(GLO)	=	PR(GLO)	-	$c * \Delta t_{LS}$	if generated with a receiver clock running in the GPS or GAL time frame
PR_mod(GLO)	=	PR(GLO)	-	$c * \Delta t_{LS_{BDS}}$	if generated with a receiver clock running in the BDT time frame
PR_mod(GPS)	=	PR(GPS)	+	$c * (\Delta t_{LS} - \Delta t_{LS_{BDS}})$	if generated with a receiver clock running in the BDT time frame

Δt_{LS} is the actual number of leap seconds between GPS/GAL and GLO time, as broadcast in the respective navigation messages and distributed in Circular T of BIPM.

$\Delta t_{LS_{BDS}}$ is the actual number of leap seconds between BDT and UTC time, as broadcast in the BeiDou navigation message.

4.3 Phase

The phase observable provided in a RINEX file is the carrier-phase range from the antenna to a satellite measured in whole cycles. Half-cycle phase measurements by squaring-type receivers must be converted to whole cycles and flagged by the respective observation code (see section 5.2.13 for further clarification).

The phase changes with the pseudorange (i.e. if the pseudorange increases with time, the phase increases as well). The phase observations between epochs must be connected by including the integer number of cycles.

If necessary, phase observations have to be corrected for phase shifts so as to be aligned to the referenced signal as indicated in Table A45. This is needed to guarantee consistency between phases of the same frequency and satellite system based on different signal channels.

If the receiver or the converter software adjusts the measurements using the real-time-derived receiver clock offsets $dT(r)$, the consistency of the 3 quantities phase / pseudorange / epoch must be maintained, i.e. the receiver clock correction shall be applied to all observables as specified in Table 5.

Table 5: Observation Corrections for Receiver Clock Offset


Time (corr)	=	Time(r)	-	$dT(r)$
PR (corr)	=	PR (r)	-	$dT(r)*c$
phase (corr)	=	phase (r)	-	$dT(r)*freq$
Doppler (corr)	=	Doppler (r)	-	$d\dot{T}(r)*freq$

4.4 Doppler

The sign of the Doppler shift as additional observable is defined as usual; positive for approaching satellites.

4.5 Satellite numbers

For clear unambiguous identification, individual satellites are identified in RINEX files by a two-digit number indicating the PRN code or the slot number. This number is preceded by a one-character system identifier **s** as shown in Figure 1.

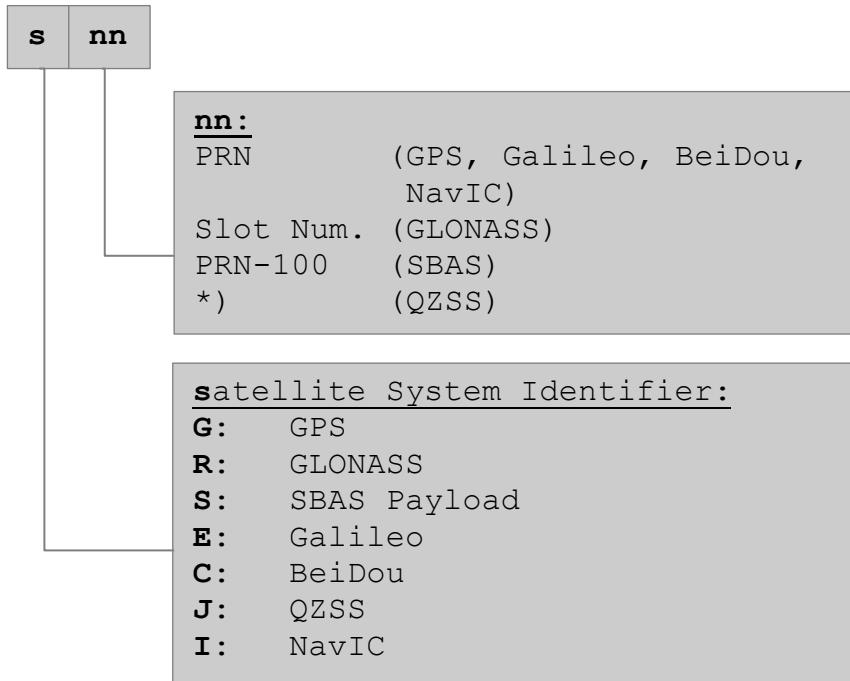**Figure 1: Satellite numbers and Constellation Identifiers**

The same satellite system identifiers are also used in all header and data records when appropriate.

*) QZSS satellites make use of signal-specific PRN codes. In RINEX files, QZSS satellites are therefore distinguished by the space vehicle identifier (SV ID) as used in the QZSS LNAV almanac. The mapping of QZSS RINEX designators (**J01-J10**) and QZSS PRNs for individual signals is shown in Table 6.

Table 6: QZSS PRN to RINEX Satellite Identifier

RINEX Satellite ID	Standard PNT Signals / Centimeter Level Augmentation	Standard PNT Signals	Sub-meter Level Augmentation	Centimeter Level Augmentation for Experiments	Positioning Technology Verification Service
	Nominal	L1 C/B	L1-SAIF / L1S	L6E	L5S
J01	193		183	203	
J02	194		184	204	184
J03	195		185	205	185
J04	196	203	186	206	186
J05	197	204		207	
J06	198			208	
J07	199		189	209	189
J08	200	205		210	205
J09	201	206		211	206
J10	202	202		212	

5 RINEX VERSION 3 AND 4 FEATURES

This chapter contains description and explanations of the RINEX 3 and 4 main features; recommended filenames, the main header elements including the observation codes for each GNSS Constellation, the observation data records, and the navigation files.

5.1 Long Filenames

From RINEX 3.02 onwards the data filenames are recommended to use the proposed long filenames to be more descriptive, flexible and extensible than the previous RINEX short file naming convention. RINEX file naming recommendations are strictly speaking not part of the RINEX format definition. However, they significantly facilitate the exchange of RINEX data in large user communities like IGS, EUREF, APREF, SIRGAS, etc.

The filename recommendations herein, and fully described in Table A1, are included for convenience as they have been agreed across many institutions. Each organization can use or adapt these names as they see fit, or use any other file naming scheme, this has no material effect on the RINEX file format.

Table 7 lists example filenames for GNSS observation and navigation files. Please note that the source of the data, the start time, the duration, the cadence and the data type are now easily visible in the filename to ease in sorting, storing and identifying data files.

This proposed naming scheme allows files from the same station over the same time period, different sources, different cadences and with different observation types to be stored together easily. See Table A1 for the full description of the file naming convention.

Table 7: Examples of long filenames for RINEX 3 data files

File Name	Comments
ALGO00CAN_R_20121601000_01H_01S_MO.rnx	Mixed RINEX GNSS observation file containing 1 hour of data, with an observation every second
ALGO00CAN_R_20121601000_15M_01S_GO.rnx	GPS RINEX observation file containing 15 minutes of data, with an observation every second
ALGO00CAN_R_20121601000_01D_30S_MO.rnx	Mixed RINEX GNSS observation file containing 1 day of data, with an observation every 30 seconds
ALGO00CAN_R_20121600000_01D_MN.rnx	RINEX mixed navigation file, containing one day's data

5.2 Observation File Header

See Table A2 for a detailed specification of the RINEX 4 observation file header. This section provides general descriptions and clarifications for the observation file header.

5.2.1 Order of the header records

As the header record descriptors in columns 61-80 are mandatory, the software reading a RINEX 4 header must decode the header records with formats according to the record descriptor in Table A2.

RINEX allows the free ordering of the header records, with the following exceptions:

- The **RINEX VERSION / TYPE** record must be the first record in a file.
- The **PGM / RUN BY / DATE** line must be the second record(line) in all RINEX files. In RINEX Observation files additional records of this type from previous file modifications or updates can be stored if needed as the lines immediately following the second line.
- The **SYS / # / OBS TYPES** record(s) should precede any **SYS / DCBS APPLIED** and **SYS / SCALE FACTOR** records.
- The **# OF SATELLITES** record (if present) should be immediately followed by the corresponding number of **PRN / # OF OBS** records.
- The **END OF HEADER** of course is the last record in the header.

5.2.2 Date/Time format in the PGM / RUN BY / DATE header record

The format of the generation time of the RINEX files stored in the second header line **PGM / RUN BY / DATE** is defined to be:

yyyymmdd hhmmss zone

zone: 3 – 4 character code for the time zone

It is recommended to use **UTC** as the time zone. Set **zone** to **LCL** if an unknown local time was used.

In RINEX Observation files additional **PGM / RUN BY / DATE** header lines can appear immediately after the second line if needed to preserve the history of previous actions on the file.

5.2.3 Marker type

To indicate the nature of the marker, a **MARKER TYPE** header record has been defined. Proposed keywords are given in Table 8.

The record is required except for **GEODETIC** and **NON_GEODETIC** marker types.

Attributes other than **GEODETIC** and **NON_GEODETIC** will tell the user program that the data were collected by a moving receiver.

The inclusion of a “start moving antenna” record (event flag ‘2’) into the data body of the RINEX file is therefore not necessary. However, event flags ‘2’ and ‘3’ (See Table A3) are necessary to flag alternating kinematic and static phases of a receiver visiting multiple earth-fixed monuments. Users may define other project-dependent keywords.

Table 8: Predefined Marker Type Keywords

Marker Type	Description
GEODETIC	Earth-fixed high-precision monument
NON_GEODETIC	Earth-fixed low-precision monument
NON_PHYSICAL	Generated from network processing
SPACEBORNE	Orbiting space vehicle
AIRBORNE	Aircraft, balloon, etc.

Marker Type	Description
WATER_CRAFT	Mobile water craft
GROUND_CRAFT	Mobile terrestrial vehicle
FIXED_BUOY	“Fixed” on water surface
FLOATING_BUOY	Floating on water surface
FLOATING_ICE	Floating ice sheet, etc
GLACIER	“Fixed” on a glacier
BALLISTIC	Rockets, shells, etc
ANIMAL	Animal carrying a receiver
HUMAN	Human being

5.2.4 Antenna references, phase centers

We distinguish between;

- The **Marker**, i.e. the geodetic reference monument, on which an antenna is mounted directly with forced centering or on a tripod.
- The **Antenna Reference Point** (ARP), i.e., a well-defined point on the antenna, e.g., the center of the bottom surface of the preamplifier. The antenna height is measured from the marker to the ARP and reported in the **ANTENNA: DELTA H/E/N** header record. Small horizontal eccentricities of the ARP with respect to the marker can be reported in the same record. On vehicles, the position of the ARP is reported in the body-fixed coordinate system in an **ANTENNA: DELTA X/Y/Z** header record.
- The **Average Phase Center**: A frequency-dependent and minimum elevation-angle-dependent position of the average phase center above the antenna reference point. Its position is important to know in mixed-antenna networks. It can be given in an absolute sense or relative to a reference antenna using the optional header record: **ANTENNA: PHASECENTER**. For fixed stations the components are in north/east/up direction, on vehicles the position is reported in the body-fixed system X,Y,Z.
- The **Orientation** of the antenna: The “zero direction” should be oriented towards north on fixed stations. Deviations from the north direction can be reported with the azimuth of the zero-direction in an **ANTENNA: ZERODIR AZI** header record. On vehicles, the zero-direction is reported as a unit vector in the body-fixed coordinate system in an **ANTENNA: ZERODIR XYZ** header record. The zero direction of a tilted antenna on a fixed station can be reported as unit vector in the left-handed north/east/up local coordinate system in an **ANTENNA: ZERODIR XYZ** header record.
- The **Boresight Direction** of an antenna on a vehicle: The “vertical” symmetry axis of the antenna pointing towards the GNSS satellites. It can be reported as unit vector in the body-fixed coordinate system in the **ANTENNA: B.SIGHT XYZ** record. A tilted antenna on a fixed station could be reported as unit vector in the left-handed north/east/up local coordinate system in the same type of header record.

In order to interpret the various positions correctly, it is important that the **MARKER TYPE** record be included in the RINEX header.

5.2.5 Antenna phase center header record

An *optional* header record for antenna phase center positions **ANTENNA: PHASECENTER** is defined to allow for higher precision positioning without need of additional external antenna information. It contains the position of an *average* phase center relative to the antenna reference point (ARP) for a specific frequency and satellite system.

On vehicles, the phase center position can be reported in the body-fixed coordinate system (**ANTENNA: DELTA X/Y/Z**), see section 5.2.4.

See section 5.2.10 regarding the use of phase center variation corrections.

5.2.6 Antenna orientation

Dedicated header records have been defined to report the orientation of the antenna zero-direction; **ANTENNA: ZERODIR**, as well as the direction of its vertical axis (bore-sight) if mounted tilted on a fixed station; **ANTENNA: B.SIGHT**.

The header records can also be used for antennas on vehicles.

5.2.7 Information about receivers on a vehicle

For the processing of data collected by receivers on a vehicle, the following additional information can be provided by special header records:

- Antenna position (position of the antenna reference point) in a body-fixed coordinate system: **ANTENNA: DELTA X/Y/Z**
- Boresight of antenna: The unit vector of the direction of the antenna axis towards the GNSS satellites. It corresponds to the vertical axis on earth-bound antenna: **ANTENNA: B.SIGHT XYZ**
- Antenna orientation: Zero-direction of the antenna. Used for the application of “azimuth”-dependent phase center variation models (see section 5.2.4): **ANTENNA: ZERODIR XYZ**
- Current center of mass of the vehicle (for space borne receivers): **CENTER OF MASS: XYZ**
- Average phase center position: **ANTENNA: PHASECENTER** (see 5.2.5)

All three quantities have to be given in the same body-fixed coordinate system. The attitude of the vehicle has to be provided by separate attitude files in the same body-fixed coordinate system.

5.2.8 Time of First/Last Observations

The header records **TIME OF FIRST OBS** and (if present) **TIME OF LAST OBS** in pure GPS, GLONASS, Galileo, QZSS, BeiDou, or NavIC observation files can contain the system time identifier defining the system that all time tags in the file are referring to:

- **GPS** to identify GPS time
- **GLO** to identify the GLONASS UTC time
- **GAL** to identify Galileo time
- **QZS** to identify QZSS time
- **BDT** to identify BDS time
- **IRN** to identify NavIC time

Pure GPS observation files default to **GPS**, pure GLONASS files default to **GLO**, pure Galileo files default to **GAL**, pure BDS observation files default to **BDT**, etc.

Multi-GNSS observation files **must** contain the system time identifier (one of the above) that all time tags refer to.

5.2.9 Corrections of differential code biases (DCBs)

For special applications, it might be useful to generate RINEX files with corrections of the satellite differential code biases (DCBs) already applied.

This can be reported by special header records **SYS / DCBS APPLIED** pointing to the file containing the applied corrections (Table A2).

5.2.10 Corrections of antenna phase center variations (PCVs)

For precise applications it is recommended that elevation-dependent, or elevation and azimuth-dependent Phase Center Variation (PCV) model for the antenna (referring to the agreed-upon ARP) be used during the processing.

For special applications, it might be useful to generate RINEX files with these PCV corrections already applied. This can be reported by special header records **SYS / PCVS APPLIED** pointing to the file containing the PCV correction models.

5.2.11 Scale factor

The *optional* **SYS / SCALE FACTOR** header record allows the storage of phase data with 0.0001 of a cycle resolution, if the data was multiplied by a scale factor of 10 before being stored into the RINEX file. This feature is used to increase resolution by 10, 100, etc only.

5.2.12 Phase Cycle Shifts

Carrier phases tracked on different signal channels or modulation bands of the same frequency in a GNSS constellation may differ in phase by 1/4 (e.g., GPS: P/Y-code-derived L2 phase vs. L2C-based phase), or by other fractional parts of a cycle. To facilitate consistent processing of all signals across different receiver platforms and applications, such phase differences must be compensated at or before the generation of RINEX observation files.

By convention, phase observations in RINEX files must always be aligned to a predefined reference signal. Table A45 specifies the reference signal for each frequency and constellation, and which signals shall align to the reference. This alignment of phases allows interoperability between different signals in the same frequency. There is no ambition to align phases across constellations.

The **SYS / PHASE SHIFT** header lines are now optional in the RINEX observation files and strongly deprecated. They are retained in the RINEX observation file header definition (Table A2) for compatibility with previous RINEX versions but they should be ignored by RINEX decoders and encoders.

5.2.13 Half-wavelength observations, half-cycle ambiguities

Half-wavelength observations of encrypted GPS P(Y)-code signals collected by **codeless** squaring techniques get their own observation codes, see section 5.2.17. If a receiver changed between squaring and full cycle tracking within the time period of a RINEX file, observation

codes for both types of observations have to be inserted into the respective **SYS / # / OBS TYPES** header record.

Half-wavelength phase observations are stored in full cycles. Ambiguity resolution, however, has to account for half wavelengths!

Full-cycle observations collected by receivers with possible half cycle ambiguity (e.g., during acquisition or after loss of lock) are to be flagged with Loss of Lock Indicator bit 1 set (see Table A3). *Note:* The loss of lock bit is the least significant bit.

5.2.14 Receiver clock offset

A receiver-derived clock offset can be optionally reported in the RINEX observation files. In order to remove uncertainties about whether the data (epoch, pseudorange, phase) have been corrected or not by the reported clock offset, use the header record: **RCV CLOCK OFFS APPL**.

5.2.15 Satellite system-dependent list of observables

The order of the observations stored per epoch and satellite in the observation records is given by a list of observation codes in a header record.

As the types of the observations actually generated by a receiver may heavily depend on the satellite system, from RINEX 4.00 it is required to have system-dependent observation code lists (header record type **SYS / # / OBS TYPES**), see a full description of all observation types in section 5.2.17.

5.2.16 GLONASS Code-Phase Alignment Header Record

Some GNSS receivers may produce biased GLONASS observations. The bias is a result of the code and phase observations not being taken at the same instant.

Phase data from GNSS receivers that issue biased data must be corrected to remove the bias.

The GLONASS CODE/PHASE BIAS (**GLONASS COD/PHS/BIS**) header record is now optional and deprecated since RINEX data file users need the data corrected but do not generally care what the correction applied was, and since the corrections may not be known at the time of RINEX file writing.

This deprecated GLONASS code-phase alignment header line contains the C1C, C1P, C2C and C2P corrections. See Table A2 for details.

5.2.17 Observation codes

Dedicated observation codes are used in RINEX to distinguish individual signals and tracking modes. In order to keep the observation codes short, but still allow for a detailed characterization of the actual signal generation, the observation codes are composed of three characters/digits “**t_na**” as detailed in Table 9.

Table 9 : Observation Code Components

t : observation type	C = pseudo-range	L = carrier phase	D = doppler	S = signal strength	x = channel number
n : band / frequency	1, 2,...,9				
a : attribute	tracking mode or channel, e.g., I , Q , C , P , etc.				

Examples:

- **L1C**: C/A code-derived L1 carrier phase (GPS, GLONASS) Carrier phase on E2-L1-E1 derived from C channel (Galileo)
- **C2L**: L2C pseudorange derived from the L channel (GPS)
- **C2x**: L2C pseudorange derived from the mixed (M+L) codes (GPS)

Blank (unknown) observation attributes (tracking modes or channels) are not supported from RINEX 3.02 onwards. Except for the ‘**x**’ pseudo-observations (see section 5.3.4) which indicate the receiver channel number(s) tracking the specific satellite, and have blank a ‘attribute’ value.

For satellite observations only the complete specification of all signals is allowed i.e. all three fields must be specified. RINEX observation codes for all supported frequencies, signals and tracking modes for all GNSS constellations are detailed in Table 10 to Table 16.

Table 10 : RINEX Version 4.02 GPS Observation Codes

GNSS System	Freq. Band / Frequency	Channel or Code	Observation Codes			
			Pseudo Range	Carrier Phase	Doppler	Signal Strength
GPS	L1/1575.42	C/A	C1C	L1C	D1C	S1C
		L1C (D)	C1S	L1S	D1S	S1S
		L1C (P)	C1L	L1L	D1L	S1L
		L1C (D+P)	C1X	L1X	D1X	S1X
		P (AS off)	C1P	L1P	D1P	S1P
		Z-tracking and similar (AS on)	C1W	L1W	D1W	S1W
		Y	C1Y	L1Y	D1Y	S1Y
		M	C1M	L1M	D1M	S1M
		codeless		L1N	D1N	S1N
		M (RMP antenna)	C1R	L1R	D1R	S1R
	L2/1227.60	C/A	C2C	L2C	D2C	S2C
		L1(C/A) + (P2-P1) (semi-codeless)	C2D	L2D	D2D	S2D
		L2C (M)	C2S	L2S	D2S	S2S
		L2C (L)	C2L	L2L	D2L	S2L
		L2C (M+L)	C2X	L2X	D2X	S2X
		P (AS off)	C2P	L2P	D2P	S2P
		Z-tracking and similar (AS on)	C2W	L2W	D2W	S2W
		Y	C2Y	L2Y	D2Y	S2Y
		M	C2M	L2M	D2M	S2M
		codeless		L2N	D2N	S2N
	L5/1176.45	M (RMP antenna)	C2R	L2R	D2R	S2R
		I	C5I	L5I	D5I	S5I
		Q	C5Q	L5Q	D5Q	S5Q
		I+Q	C5X	L5X	D5X	S5X

Antispoofing (AS) of GPS: Various techniques may be used by GPS receivers to track the encrypted GPS P(Y)-Code during Antispoofing (AS). In view of different properties of the resulting observations, which need to be considered in the observation modelling, RINEX offers multiple attributes to unambiguously distinguish the respective observations. True codeless GPS receivers (squaring-type receivers) use the attribute **N**. Semi-codeless receivers tracking the first frequency using C/A code and the second frequency using some codeless options use attribute **D**. Z-tracking under AS or similar techniques to recover pseudorange and phase on the “P-code” band use attribute **W**. Y-code tracking receivers (e.g. units employing a Selective Availability Anti-Spoofing Module (SAASM)) use attribute **Y**.

Table 11 : RINEX Version 4.02 GLONASS Observation Codes

GNSS System	Freq. Band / Frequency	Channel or Code	Observation Codes			
			Pseudo Range	Carrier Phase	Doppler	Signal Strength
GLONASS	G1/ 1602+k*9/16 k= -7....+12	C/A	C1C	L1C	D1C	S1C
		P	C1P	L1P	D1P	S1P
	G1a/ 1600.995	L1OCd	C4A	L4A	D4A	S4A
		L1OCp	C4B	L4B	D4B	S4B
		L1OCd+ L1OCp	C4X	L4X	D4X	S4X
	G2/ 1246+k*7/16	C/A	C2C	L2C	D2C	S2C
		P	C2P	L2P	D2P	S2P
	G2a/ 1248.06	L2CSI	C6A	L6A	D6A	S6A
		L2OCp	C6B	L6B	D6B	S6B
		L2CSI+ L2OCp	C6X	L6X	D6X	S6X
	G3 / 1202.025	I	C3I	L3I	D3I	S3I
		Q	C3Q	L3Q	D3Q	S3Q
		I+Q	C3X	L3X	D3X	S3X

Table 12 : RINEX Version 4.02 Galileo Observation Codes

GNSS System	Freq. Band / Frequency	Channel or Code	Observation Codes			
			Pseudo Range	Carrier Phase	Doppler	Signal Strength
Galileo	E1 / 1575.42	A PRS	C1A	L1A	D1A	S1A
		B OS data	C1B	L1B	D1B	S1B
		C OS pilot	C1C	L1C	D1C	S1C
		B+C	C1X	L1X	D1X	S1X
		A+B+C	C1Z	L1Z	D1Z	S1Z
	E5a / 1176.45	I F/NAV OS	C5I	L5I	D5I	S5I
		Q no data	C5Q	L5Q	D5Q	S5Q
		I+Q	C5X	L5X	D5X	S5X
	E5b / 1207.140	I I/NAV OS/CS/SoL	C7I	L7I	D7I	S7I
		Q no data	C7Q	L7Q	D7Q	S7Q
		I+Q	C7X	L7X	D7X	S7X
	E5(E5a+E5b) / 1191.795	I	C8I	L8I	D8I	S8I
		Q	C8Q	L8Q	D8Q	S8Q
		I+Q	C8X	L8X	D8X	S8X
	E6 / 1278.75	A PRS	C6A	L6A	D6A	S6A
		B C/NAV CS	C6B	L6B	D6B	S6B
		C no data	C6C	L6C	D6C	S6C
		B+C	C6X	L6X	D6X	S6X
		A+B+C	C6Z	L6Z	D6Z	S6Z

Table 13 : RINEX Version 4.02 SBAS Observation Codes

GNSS System	Freq. Band/ Frequency	Channel or Code	Observation Codes			
			Pseudo Range	Carrier Phase	Doppler	Signal Strength
SBAS	L1 / 1575.42	C/A	C1C	L1C	D1C	S1C
		I	C5I	L5I	D5I	S5I
	L5 / 1176.45	Q	C5Q	L5Q	D5Q	S5Q
		I+Q	C5X	L5X	D5X	S5X

Table 14 : RINEX Version 4.02 QZSS Observation Codes

GNSS System	Freq. Band / Frequency	Channel or Code	Observation Codes			
			Pseudo Range	Carrier Phase	Doppler	Signal Strength
QZSS	L1 / 1575.42	C/A	C1C	L1C	D1C	S1C
		C/B	C1E	L1E	D1E	S1E
		L1C (D)	C1S	L1S	D1S	S1S
		L1C (P)	C1L	L1L	D1L	S1L
		L1C (D+P)	C1X	L1X	D1X	S1X
		L1S/L1-SAIF	C1Z	L1Z	D1Z	S1Z
		L1Sb	C1B	L1B	D1B	S1B
	L2 / 1227.60	L2C (M)	C2S	L2S	D2S	S2S
		L2C (L)	C2L	L2L	D2L	S2L
		L2C (M+L)	C2X	L2X	D2X	S2X
	L5 / 1176.45 *) Block I+II Signals **) Block II L5S Signals	I *	C5I	L5I	D5I	S5I
		Q *	C5Q	L5Q	D5Q	S5Q
		I+Q *	C5X	L5X	D5X	S5X
		L5S(I) **	C5D	L5D	D5D	S5D
		L5S(Q) **	C5P	L5P	D5P	S5P
		L5S(I+Q) **	C5Z	L5Z	D5Z	S5Z
		L6D *,**	C6S	L6S	D6S	S6S
	L6 / 1278.75 *) Block I LEX Signals **) Block II Signals	L6P *	C6L	L6L	D6L	S6L
		L6(D+P) *	C6X	L6X	D6X	S6X
		L6E **	C6E	L6E	D6E	S6E
		L6(D+E) **	C6Z	L6Z	D6Z	S6Z

Note: The RINEX 1Z signal code is used for both the initial Block I L1-SAIF signal and the updated L1S signal. L6D is the “code 1” of the L61(Block I) and L62 (Block II) signals, L6P is the “code 2” (or pilot) signal of the L61(Block I) signal and L6E is the “code 2” of the L62 (Block II) signal as specified in IS-QZSS-L6. See section 4.5 and Table 6 for QZSS PRN to RINEX identifier coding.

Table 15 : RINEX Version 4.02 BDS Observation Codes

GNSS System	Freq. Band / Frequency	Channel or Code	Observation Codes			
			Pseudo Range	Carrier Phase	Doppler	Signal Strength
BDS	B1 / 1561.098 (BDS-2/3 Signals)	I (B1I signal)	C2I	L2I	D2I	S2I
		Q	C2Q	L2Q	D2Q	S2Q
		I+Q	C2X	L2X	D2X	S2X
	B1C / 1575.42 (BDS-3 Signals)	Data	C1D	L1D	D1D	S1D
		Pilot	C1P	L1P	D1P	S1P
		Data+Pilot	C1X	L1X	D1X	S1X
	B1A / 1575.42 (BDS-3 Signals)	Data	C1S	L1S	D1S	S1S
		Pilot	C1L	L1L	D1L	S1L
		Data+Pilot	C1Z	L1Z	D1Z	S1Z
	B2a / 1176.45 (BDS-3 Signals)	Data	C5D	L5D	D5D	S5D
		Pilot	C5P	L5P	D5P	S5P
		Data+Pilot	C5X	L5X	D5X	S5X
	B2 / 1207.140 (BDS-2 Signals)	I (B2I signal)	C7I	L7I	D7I	S7I
		Q	C7Q	L7Q	D7Q	S7Q
		I+Q	C7X	L7X	D7X	S7X
	B2b / 1207.140 (BDS-3 Signals)	Data	C7D	L7D	D7D	S7D
		Pilot	C7P	L7P	D7P	S7P
		Data+Pilot	C7Z	L7Z	D7Z	S7Z
	B2(B2a+B2b)/1191.795 (BDS-3 Signals)	Data	C8D	L8D	D8D	S8D
		Pilot	C8P	L8P	D8P	S8P
		Data+Pilot	C8X	L8X	D8X	S8X
	B3/1268.52 (BDS-2/3 Signals)	I	C6I	L6I	D6I	S6I
		Q	C6Q	L6Q	D6Q	S6Q
		I+Q	C6X	L6X	D6X	S6X
	B3A / 1268.52 (BDS-3 Signals)	Data	C6D	L6D	D6D	S6D
		Pilot	C6P	L6P	D6P	S6P
		Data+Pilot	C6Z	L6Z	D6Z	S6Z

Note: When reading a RINEX file, both 1I/Q/X and 2I/Q/X observation codes should be accepted and treated the same as 2I/Q/X in the current RINEX standard.

Table 16 : RINEX Version 4.02 NavIC Observation Codes

GNSS System	Freq. Band / Frequency	Channel or Code	Observation Codes			
			Pseudo Range	Carrier Phase	Doppler	Signal Strength
NavIC	L1 / 1575.42	Data	C1D	L1D	D1D	S1D
		Pilot	C1P	L1P	D1P	S1P
		Data+Pilot	C1X	L1X	D1X	S1X
	L5 / 1176.45	A SPS	C5A	L5A	D5A	S5A
		B RS (D)	C5B	L5B	D5B	S5B
		C RS (P)	C5C	L5C	D5C	S5C
		B+C	C5X	L5X	D5X	S5X
	S / 2492.028	A SPS	C9A	L9A	D9A	S9A
		B RS (D)	C9B	L9B	D9B	S9B
		C RS (P)	C9C	L9C	D9C	S9C
		B+C	C9X	L9X	D9X	S9X

5.3 Observation Data Records

See section 8 for a detailed specification of the RINEX data record description. Below are some descriptions and clarifications for some of the data records elements.

Each observation record begins with the satellite identifier **snn** (see section 4.5), the epoch record starts with special character **>**. It is now also much easier to synchronize the reading program with the next epoch record in case of a corrupted data file or when streaming observation data in a RINEX-like format.

There is no data record length limitation as it depends on the declared constellation observation list and the available observables per satellite per epoch.

Table 17 shows a sample list of observation types for six satellite systems **G, E, S, R, C, J**.

Table 17 : Example Observation Type Records

G	22	C1C	L1C	D1C	S1C	C1W	S1W	C2W	L2W	D2W	S2W	C2L	L2L	D2L	SYS / # / OBS TYPES
		S2L	C5Q	L5Q	D5Q	S5Q	C1L	L1L	D1L	S1L					SYS / # / OBS TYPES
E	20	C1C	L1C	D1C	S1C	C6C	L6C	D6C	S6C	C5Q	L5Q	D5Q	S5Q	C7Q	SYS / # / OBS TYPES
		L7Q	D7Q	S7Q	C8Q	L8Q	D8Q	S8Q							SYS / # / OBS TYPES
S	8	C1C	L1C	D1C	S1C	C5I	L5I	D5I	S5I						SYS / # / OBS TYPES
R	20	C1C	L1C	D1C	S1C	C1P	L1P	D1P	S1P	C2P	L2P	D2P	S2P	C2C	SYS / # / OBS TYPES
		L2C	D2C	S2C	C3Q	L3Q	D3Q	S3Q							SYS / # / OBS TYPES
C	20	C1P	L1P	D1P	S1P	C5P	L5P	D5P	S5P	C2I	L2I	D2I	S2I	C7I	SYS / # / OBS TYPES
		L7I	D7I	S7I	C6I	L6I	D6I	S6I							SYS / # / OBS TYPES
J	20	C1C	L1C	D1C	S1C	C2L	L2L	D2L	S2L	C5Q	L5Q	D5Q	S5Q	C1L	SYS / # / OBS TYPES
		L1L	D1L	S1L	C1Z	L1Z	D1Z	S1Z							SYS / # / OBS TYPES

RINEX observations are written as detailed in section 6.7. An epoch and partial observation records example is provided in Table 18.

Table 18 : Example RINEX Observation Record

> 2020 01 28 00 00 0.0000000 0 48	-0.123456789012 12345
C19 24654392.553 7 129559707.78007	-2902.686 7 44.750 24654395.451
→7 96749126.04807 -2167.576 7 44.500 24654390.675 7 128381880.85807	46.250
→-2876.245 7	
→24654391.375 7 104320752.71507 -2337.249 7 45.250	
E04 23840346.329 7 125281891.86507 1327.432 7 47.250 23840348.158	
→8 101689874.47708 1077.475 8 50.500 23840349.531 8 93554698.18708	
→991.252 8 50.500 23840347.337 8 95995235.59308 1017.092 8	
→50.750 23840348.470 8 94774971.96308 1004.174 8 53.750	
G02 22187868.655 7 116598092.03507 1322.609 7 46.750 22187867.444	
→5 34.750 22187866.324 5 90855658.54005 1030.607 5 34.750	
J02 39360055.791 6 206838418.87206 -2309.902 6 41.500 39360060.423	
→6 161172711.84406 -1799.765 6 38.750 39360062.564 7 154457226.33407	
→-1724.901 7 44.250 39360056.067 7 206838395.87407 -2309.921 7	
→42.000 39360052.638 6 206838394.23206 -2309.937 6 41.500	
R02 20785793.428 8 110917264.66308 -3161.955 8 50.000 20785793.589	
→8 110917013.67108 -3161.968 8 50.500 20785800.249 7 86268837.39807	
→-2459.221 7 46.250 20785800.084 7 86268905.40407 -2459.355 7	
→45.750	
S29 40051393.288 5 210471465.60005 2.190 5 35.750	
S38 37925915.028 7 199302015.88507 -3.269 7 45.750 37925889.993	
→8 148829334.35608 -2.392 8 49.250	

The long observation lines per satellite are wrapped to fit the table width, each new line starts with a PRN and is wrapped (indicated by →) until the next PRN (no width limitation to the satellite observation lines).

5.3.1 Order of Data records

Multiple epoch observation data records with identical time tags are not allowed (exception: Event records).

Epochs in a RINEX file have to be listed ordered in time.

5.3.2 Event flag records

Special occurrences during the tracking can be indicated in the **EPOCH** event flag in a RINEX observation file. The event flag is the integer after the number of seconds in the epoch, different such events can be indicated using integers;

- 2 - start moving antenna
- 3 - new site occupation (end of kinematic data) (at least **MARKER NAME** record follows)
- 4 - header information follows
- 5 - external event (epoch is significant, same time frame as observation time tags)

The “number of satellites” field if the event field is ≥ 2 then corresponds to the number of records of the same epoch following the **EPOCH** record. Therefore, the “number of satellites” in the **EPOCH** may be used to skip the appropriate number of data records if certain event flags are not to be evaluated in detail (Table A3).

5.3.3 RINEX observation data records for GEO & SBAS satellites

Satellite-Based Augmentation System (SBAS) payloads on GEO satellites transmitting navigation signals. The satellite identifier ‘**s**’ is to be used, as shown in Figure 1, in the **RINEX VERSION / TYPE** header line and to identify the satellite. The PRN ‘**nn**’ is defined as being the GEO PRN number minus 100;

e.g.: PRN = 120 \Rightarrow **Snn** = **S20**

5.3.4 Channel numbers as pseudo-observables

For special applications, it might be necessary to know the receiver channel numbers having been assigned by the receiver to the individual satellites and band/frequency. We may include this information as a pseudo-observable in each epoch data record line per satellite:

t : observation type:	x = Receiver channel number
n : band / frequency :	1,2,...,9
a : attribute:	blank

The lowest channel number allowed is 1 (re-number channels beforehand, if necessary). In the case of a receiver using multiple channels for one satellite, the channels could be packed with two digits each right-justified into the same data field, order corresponding to the order of the observables concerned. Using a Fortran float number format F14.3 according to (<5-nc>(2X),<nc>I2.2,’.000’), nc being the number of channels.

Restriction: Not more than 5 channels and channel numbers <100.

Examples:

- **0910.000** for channels 9 and 10
- **010203.000** for channels 1, 2, and 3

5.4 RINEX Navigation Messages

From RINEX 4.00 it is encouraged to record at each station ‘Mixed’ navigation files containing all the GNSS system navigation messages. Navigation files for individual constellations are allowed but discouraged to reduce the number of files from a station.

Merged RINEX navigation files (whether from an individual station or from a station network) are described in section 6.11 and are always expected to contain the navigation messages of all the tracked satellites in mixed or individual constellation mode.

The data portion of the navigation message files contains the broadcast navigation data records scaled to engineering units and with floating point numbers. The navigation message format is similar for all satellite systems. All legacy navigation messages supported by earlier RINEX versions remain unchanged and all new navigation messages reuse the fixed grid of four columns with a width of 19 characters.

The number of records per message and the contents are constellation and signal dependent as detailed in section 8.3. Using the new Data Record Header Line which contains; a navigation record type, the satellite or constellation identifier and the navigation message type (see section 5.4.1), the reading program can determine the number of fields to be read for each data record as defined in each of the corresponding Appendix Tables.

From RINEX 4.00 constellation and global dependent navigation file contents have been removed from the header and included as specific system time correction, earth orientation and ionosphere navigation messages.

The time tags of the navigation messages (e.g., time of ephemeris, time of clock) are given in the respective satellite system time following the convention described in section 4.1.

A navigation file shall avoid storing redundant navigation messages in the RINEX file (e.g., the same message broadcast at different times, or containing exactly the same data). In case of multiple navigation data sets with identical contents, priority should be given to storing the one with the earliest transmission time.

5.4.1 Navigation Data Record Header Line

From RINEX 4.00 an initial line is included to indicate the start of a new navigation data record. This navigation data record header line contains a starting indicator “>”, a navigation data record type, the source of the data, the message type indicator from which the data record is obtained, and the navigation message subtype (from RINEX 4.02), this is the new Data Record Header

Line.

The navigation message subtypes are defined and required only for the selected navigation message record types shown in Table 22 to Table 25. If no navigation message subtype is defined for a specific navigation message type, the respective field shall be left blank.

The first element, the record type, is as presented in Table 19.

Table 19: Navigation Data Record Types

Nav Data Record Type	Description
EPH	Ephemerides data including orbit, clock, biases, accuracy and status parameters.
STO	System Time and UTC proxy offset parameters
EOP	Earth Orientation Parameters

ION	Global/Regional ionospheric model parameters
------------	--

The second element is the source of the navigation data record. It is indicated with the constellation letter (**G**, **R**, **E**, **C**, **J**, **I**, **S**), plus when necessary the two-digit satellite number of the transmitting satellite. Redundant constellation data records coming from different satellites with the exact same values shall not be repeated.

The navigation message type indicator is the final element of the Data Record Header Line and it depends on the data record type of Table 19.

Table 20: EPH Navigation Message Types

EPH Nav Message Types	Description	Constellation and signal
LNAV	GPS/QZSS/NavIC Legacy Navigation Messages	GPS L1 C/A, QZSS L1 C/A or L1 C/B, NavIC L5/S SPS
FDMA	GLONASS Legacy FDMA Message	GLO L1 C/A
FNAV	Galileo Free Navigation Message	GAL E5a
INAV	Galileo Integrity Navigation Message	GAL E1, E5b
D1	BeiDou-2/3 MEO/IGSO Navigation Message	BDS B1I, B2I, B3I
D2	BeiDou-2/3 GEO Navigation Message	BDS B1I, B2I, B3I
SBAS	SBAS Navigation Message	SBAS L1
CNAV	GPS/QZSS CNAV Navigation Message	GPS/QZSS L2C, L5
CNV1	BeiDou-3 CNAV-1 Navigation Message	BDS-3 B1C
CNV2	GPS/QZSS CNAV-2 Navigation Message BeiDou-3 CNAV-2 Navigation Message	GPS/QZSS L1C BDS-3 B2a
CNV3	BeiDou-3 CNAV-3 Navigation Message	BDS-3 B2b
L1NV	NavIC L1 Navigation Message	NavIC L1
L1OC	GLONASS L1 CDMA Nav Message	GLO L1OC
L3OC	GLONASS L3 CDMA Nav Message	GLO L3OC

Constellation or System navigation data records (**STO**, **EOP**, **ION** from Table 19) contain data commonly transmitted by different groups of navigation messages and thus the granularity of the message type indicators can be reduced to prevent many copies of the same data being repeated in a navigation file.

Table 21: STO, EOP, ION Navigation Message Types

STO, EOP, ION Nav Message Types	Description	Constellation and signal
LNAV	GPS/QZSS/NavIC Legacy Navigation Messages	GPS L1 C/A, QZSS L1 C/A or L1 C/B, NavIC L5/S SPS
FDMA	GLONASS Legacy FDMA Navigation	GLO L1 C/A

STO, EOP, ION Nav Message Types	Description	Constellation and signal
	Message	
IFNV	Galileo INAV or FNAV Navigation Message	GAL E1, E5a, E5b
D1D2	BeiDou-2/3 MEO/IGSO and GEO Navigation Message	BDS B1I, B2I, B3I
SBAS	SBAS Navigation Message	SBAS L1
CNVX	GPS/QZSS CNAV Navigation Message BeiDou-3 CNAV-1, CNAV-2 or CNAV-3 Navigation Message	GPS/QZSS L2C, L5 BDS-3 B1C, B2I, B3I
L1NV	NavIC L1 Navigation Message	NavIC L1
LXOC	GLONASS L1/L3 CDMA Nav Message	GLO L1/L3

Table 22: EPH Navigation Message Subtypes

EPH Nav Message Types	EPH Subtypes	Description	Constellation and signal
N/A	N/A	No Subtypes yet available	No Subtypes yet available

Table 23: STO Navigation Message Subtypes

STO Nav Message Types	STO Subtypes	Description	Constellation and signal
N/A	N/A	No Subtypes yet available	No Subtypes yet available

Table 24: EOP Navigation Message Subtypes

EOP Nav Message Types	EOP Subtypes	Description	Constellation and signal
N/A	N/A	No Subtypes yet available	No Subtypes yet available

Table 25: ION Navigation Message Subtypes

ION Nav Message Types	ION Subtypes	Description	Constellation and signal
CNVX	WIDE	QZSS Wide area coefficients	QZSS L2C, L5
CNVX	JAPN	QZSS Japan area coefficients	QZSS L2C, L5
L1NV	KLOB	NavIC Klobuchar model.	NavIC L1
L1NV	NEQN	NavIC NeQuick-N model.	NavIC L1

The navigation data message header lines¹ are then, for example:

```
> EPH G01 LNAV
> STO R FDMA
> ION E08 IFNV
> EOP J01 CNVX
> ION I L1NV KLOB
```

5.4.2 EPH Navigation messages for GPS (LNAV, CNAV, CNV2)

The specifications for the GPS satellite navigation messages are in Table A9, Table A10, and Table A11. After the new Data Record Header Line the **LNAV** message is defined exactly as in previous RINEX versions. The first data record always contains the epoch, and satellite clock information. The following lines contain the orbit parameters for the satellite, the time of applicability of the navigation message, health flag, accuracy information, group delays, etc.

5.4.3 EPH Navigation messages for Galileo (INAV, FNAV)

The specifications for the Galileo satellite navigation message are in Table A13. The Galileo Open Service allows access to two navigation message types: **FNAV** (Free Navigation) and **INAV** (Integrity Navigation). The content of the two messages differs in various items, however, in general it is very similar to the content of the GPS (**LNAV**) navigation message, e.g. the orbit parameterization is the same.

There are items in the navigation message that depend on the origin of the message (**FNAV** or **INAV**): The SV clock parameters define the satellite clock for the dual-frequency ionosphere-free linear combination. FNAV reports the clock parameters valid for the E5a-E1 combination, the INAV reports the parameters for the E5b-E1 combination. The second parameter in the **Broadcast Orbit 5** record (bits 8 and 9) indicates the frequency pair the stored clock corrections are valid for.

RINEX file encoders shall encode one RINEX Galileo navigation message for each **FNAV** and **INAV** signal decoded. Therefore, if both messages are decoded, then the relevant bit fields must be set in the RINEX message, and both should be written in separate messages. The Galileo ICD Section 5.1.9.2 indicates that some of the contents of the broadcast navigation message may change, yet the issue of data (IOD) may not change. To ensure that all relevant information is available message encoders should monitor the contents of the file and write new navigation messages when the contents have changed.

RINEX file parsers should expect to encounter **FNAV** and **INAV** messages with the same IOD in the same file. Additionally, parsers should also expect to encounter more than one **FNAV** or **INAV** ephemeris message with the same IOD, as the navigation message Data Validity Status (DVS) and other parameters may change independently of the IOD, yet some other data may be the same, however, the transmission time will be updated (See Note in Galileo ICD Section 5.1.9.2 Issue of Data).

¹ The navigation data message header lines have fixed width and are composed by the navigation message identifier **>** (A1), the navigation data record type (A3), the data source (A3), the navigation message type (A4) (except for BDS D1/D2 (A2)), and, only if available, the navigation message subtype (A4). All the fields are separated by one blank (1X).

As mentioned in section 4.1.8 the GAL week in the RINEX navigation message files is a continuous number; it has been aligned to the GPS week by the program creating the RINEX file.

5.4.4 EPH Navigation message for GLONASS (FDMA, L1OC, L3OC)

The specifications for the GLONASS satellite navigation message are in Table A15, Table A16, Table A17. The first data record contains the epoch, and satellite clock information. The following three records contain the satellite position, velocity and acceleration, the clock and frequency biases, as well as auxiliary information such as health, satellite frequency (channel) and age of the information.

The last record includes Status and Health flags, the signal group delay difference and the accuracy index, but some of the values in the last record only apply to GLO-M/K satellites.

The corrections of the satellite time to the UTC proxy is as follows:

$$\text{GLONASS: } \text{Tutc} = \text{Tsv} + \text{TauN} - \text{GammaN} * (\text{Tsv}-\text{Tb}) + \text{TauC}$$

In order to use the same sign conventions, the broadcast GLONASS values are stored in the navigation file (in GLONASS **EPH** and **STO** messages) as: -TauN, +GammaN, -TauC.

The time tags in the GLONASS navigation files are given in UTC (i.e. **not** Moscow time nor GPS time).

5.4.5 EPH Navigation messages for QZSS (LNAV, CNAV, CNV2)

The QZSS navigation messages are defined in Table A19, Table A20 and Table A21. The messages are defined in-line with the GPS equivalent messages but for completeness and in view of some selected differences fully independent definition tables are included.

5.4.6 EPH Navigation messages for BDS (D1/D2, CNV1, CNV2, CNV3)

The BDS Open Service broadcast navigation messages are defined in Table A23, Table A24, Table A25, and Table A26. As with all other message the first data record contains epoch and satellite clock information, followed by the orbit parameters, several time parameters, and health and accuracy flags.

The BDT week number is a continuous number. The broadcast 13-bit BDS System Time week has a roll-over after 8191. It starts at zero on: 1-Jan-2006, hence;

$$\text{BDT week} = \text{BDT week_BRD} + (n * 8192) \text{ (Where n: number of BDT roll-overs).}$$

New navigation messages shall be triggered only at t_oc changes. This means that the t_op/SISAI values of the CNV1/2/3 navigation messages could be different between RINEX files for the same satellite and epoch depending on the exact time of decoding. The values of the t_op/SISAI change much faster than the other ephemerides, but they will not trigger new navigation messages.

5.4.7 EPH Navigation message for SBAS satellites (SBAS)

The specifications for SBAS satellite navigation message are in Table A28. Navigation data records for SBAS satellites are mainly based on the contents of the MT 9 "GEO Navigation Message" with optional health information from the MT17 "GEO Almanacs" message.

The first data record line contains the epoch and satellite clock information; the following records contain the satellite position, velocity and acceleration and auxiliary information (health, URA and IODN).

The time tags in the GEO navigation data are given in the GPS time frame, i.e. **not** UTC.

The corrections of the satellite time to UTC is as follows:

$$\text{GEO: } \text{Tutc} = \text{Tsv} - \text{aGf0} - \text{aGf1} * (\text{Tsv}-\text{Toe}) - \text{W0} - \Delta t_{\text{LS}}$$

W0 being the correction to transform the GEO system time to the UTC proxy. See Toe , aGf0 , aGf1 in Table A28 format definition table.

The *Transmission Time of Message* is expressed in GPS seconds of the week. It marks the beginning of the message transmission. It has to refer to the same GPS week as the *Epoch of Ephemerides*. If necessary, the *Transmission Time of Message* may have to be adjusted by - or + 604800 seconds (which would make it lower than zero or larger than 604800, respectively and then further corrected to correspond to the *Epoch of Ephemeris*) so that it is referenced to the GPS week of the *Epoch of Ephemeris*.

Health is defined as follows:

- bits 0 to 3 equal to *health* in Message Type 17 (MT17)
- bit 4 is set to 1 if MT17 health is unavailable
- bit 5 is set to 1 if the URA index is equal to 15

In the SBAS message definitions, bit 3 of the health word is currently marked as *reserved*. In case of bit 4 set to 1, it is recommended to set bits 0,1,2,3 to 1, as well.

User Range Accuracy (URA);

The same convention for converting the URA index to meters is used as with GPS. Set URA = 32767 meters if URA index = 15.

5.4.8 EPH Navigation messages for NavIC (LNAV, L1NV)

The NavIC Open Service Legacy (LNAV) broadcast navigation message is similar in content to the GPS LNAV navigation message. See Table A30 and Table A32 or a description and examples of each field.

The NavIC L1 navigation message (L1NV) shares the basic structure of the GPS/QZS CNAV-2 message. See Table A31 and Table A32 for a description and examples of each field.

5.4.9 STO Messages for System Time and UTC Offset

The STO messages replace the previous “**SYSTEM TIME CORR**” header line(s).

The STO message is defined in Table A33. GNSS satellites transmit different system time offsets. With these offsets timing information can be converted between GNSS time scales or from a GNSS time scale to a UTC proxy. Only the fractional-second parts of the respective offset are provided in the STO records. Information on full leap seconds between GPS time to UTC (since 6 Jan 1980) is contained in the “**LEAP SECONDS**” header line which is now compulsory for navigation files (see Table A7).

Table 26: Navigation Message System Time Offset labels

System		UTC	GPS	GLO	Galileo	BeiDou	QZSS	NavIC
	2 letter codes	UT	GP	GL	GA	BD	QZ	IR
GPS	GP	GPUT						
GLONASS	GL	GLUT	GLGP					
Galileo	GA	GAUT	GAGP	GAGL				
BeiDou	BD	BDUT	BDGP	BDGL	BDGA			
QZSS	QZ	QZUT	QZGP	QZGL	QZGA	QZBD		
NavIC	IR	IRUT	IRGP	IRGL	IRGA	IRBD	IRQZ	
SBAS	SB	SBUT	SBGP	SBGL	SBGA	SBBD	SBQZ	SBIR

In case of the UTC time offsets, the specific UTC proxy referenced is specified by a dedicated indicator; the UTC ID.

Valid UTC ID entries include: **UTC (USNO)** , **UTC (SU)** , **UTC GAL** , **UTC (NTSC)** , **UTC (NICT)** , **UTC (NPLI)** , **UTC CIRN** , **UTC (OP)** , **UTC (NIST)** . A UTC ID is necessary, as detailed in Table 27, for every “**UT**” time offset message.

Table 27: Navigation Message System Time UTC indicator

System	UTC Offset label	UTC ID
GPS	GPUT	UTC (USNO)
GLONASS	GLUT	UTC (SU)
Galileo	GAUT	UTC GAL
BeiDou	BDUT	UTC (NTSC)
QZSS	QZUT	UTC (NICT)
NavIC	IRUT	UTC CIRN / UTC (NPLI)
SBAS	SBUT	UTC (USNO) UTC (NICT) UTC (NIST) UTC (OP) UTC (NTSC)

For Galileo, the “UTC” to which the **GAUT** offset refers to is a prediction of UTC based on UTC realisations available at several metrological institutes in Europe, by the Galileo Time Service Provider, and the designation **UTC GAL** has been adopted as naming for the prediction of UTC broadcast by Galileo.

For NavIC, which transmits two distinct offsets of NavIC system time with respect to both UTC and to UTC(NPLI), the correct UTC ID (**UTCIRN** or **UTC (NPLI)**) shall be used for each case.

In terms of SBAS different **SBUT** values will require different UTC IDs for each system. Thus, additionally an SBAS ID indicator must also be specified for every **SBUT** value. Current SBAS ID values are: **WAAS**, **EGNOS**, **MSAS**, **GAGAN**, **SDCM**, **BDSBAS**, **KASS**, **A-SBAS**, **SPAN**. See Table A33 for the structure of the STO message and the use of these indicators.

The time offset parameters for different constellations and navigation messages and how the parameters are to be used are indicated in Table 28.

Table 28: Time Offset Parameters per GNSS and per Navigation Message

System	STO Nav Mssg Type	Definition	Time sys offset labels (Message parameters)
GPS	LNAV	$t_{GPS} - t_{UTC(USNO)} = \Delta t_{ls}^{1980} + A_0 + A_1(t - t_{ot})_{GPS}$	GPUT $(+A_0, +A_1; t_{ot})$
	CNVX	$t_{GPS} - t_{UTC(USNO)} = \Delta t_{ls}^{1980} + A_0 + A_1(t - t_{ot})_{GPS} + A_2(t - t_{ot})_{GPS}^2$	GPUP $(+A_0, +A_1, +A_2; t_{ot})$
		$t_{GAL} - t_{GPS} = -A_0 - A_1(t - t_{ggto})_{GPS} - A_2(t - t_{ggto})_{GPS}^2$	GAGP $(-A_0, -A_1; t_{ggto})$
GLO	LNAV	$t_{UTC(SU)} + 3h - t_{GLO} = \tau_c$	GLUT $(-\tau_c; t_{0d})$
		$t_{GPS} - t_{GLO} = -3h + \Delta t_{ls}^{1980} + \tau_{GPS}$	GLGP $(-\tau_{GPS}; t_{0d})$
GAL	IFINV	$t_{GAL} - t_{UTC} = \Delta t_{ls}^{1980} + A_0 + A_1 \cdot (t - t_{ot})_{GAL}$	GAUT $(+A_0, +A_1; t_{ot})$
		$t_{GAL} - t_{GPS} = A_0 + A_1 \cdot (t - t_{og})_{GAL}$	GAGP $(+A_0, +A_1; t_{og})$
BDS	D1D2	$t_{BDS} - t_{UTC(NTSC)} = \Delta t_{ls}^{2006} + A_0 + A_1 \cdot (t - t_{0w})_{BDS}$	BDUT $(+A_0, +A_1; t_{0w})$
		$t_{BDS} - t_{GPS} = A_0 + A_1(t - t_{0w})_{BDS}$	BDGP $(+A_0, +A_1; t_{0w})$
		$t_{BDS} - t_{GAL} = A_0 + A_1(t - t_{0w})_{BDS}$	BDGA $(+A_0, +A_1; t_{0w})$
		$t_{BDS} - t_{GLO} = A_0 + A_1(t - t_{0w})_{BDS}$	BDGL $(+A_0, +A_1; t_{0w})$
	CNVX	$t_{BDS} - t_{UTC(NTSC)} = \Delta t_{ls}^{2006} + A_0 + A_1(t - t_{ot})_{BDS} + A_2(t - t_{ot})_{BDS}^2$	BDUT $(+A_0, +A_1, +A_2; t_{ot})$
		$t_{BDS} - t_{GPS} = A_0 + A_1(t - t_{bgto})_{BDS} + A_2(t - t_{bgto})_{BDS}^2$	BDGP $(+A_0, +A_1, +A_2; t_{bgto})$
		$t_{BDS} - t_{GAL} = A_0 + A_1(t - t_{bgto})_{BDS} + A_2(t - t_{bgto})_{BDS}^2$	BDGA $(+A_0, +A_1, +A_2; t_{bgto})$
		$t_{BDS} - t_{GLO} = A_0 + A_1(t - t_{bgto})_{BDS} + A_2(t - t_{bgto})_{BDS}^2$	BDGL $(+A_0, +A_1, +A_2; t_{bgto})$
QZSS	LNAV	$t_{QZS} - t_{UTC(NICT)} = \Delta t_{ls}^{1980} + A_0 + A_1(t - t_{ot})_{QZS}$	QZUT $(+A_0, +A_1; t_{ot})$

System	STO Nav Mssg Type	Definition	Time sys offset labels (Message parameters)
	CNVX	$t_{QZS} - t_{UTC(NICT)} = \Delta t_{ls}^{1980} + A_0 + A_1(t - t_{ot})_{QZS} + A_2(t - t_{ot})_{QZS}^2$	QZUT $(+A_0, +A_1, +A_2; t_{ot})$
NavIC	LNAV	$t_{IRS} - t_{UTC} = \Delta t_{ls}^{1980} + A_0 + A_1(t - t_{ot})_{IRS} + A_2(t - t_{ot})_{IRS}^2$	IRUT $(+A_0, +A_1, +A_2; t_{ot})$
		$t_{IRS} - t_{UTC(NPLI)} = \Delta t_{ls}^{1980} + A_0 + A_1(t - t_{ot})_{IRS} + A_2(t - t_{ot})_{IRS}^2$	IRUT $(+A_0, +A_1, +A_2; t_{ot})$
		$t_{IRS} - t_{GPS} = A_0 + A_1(t - t_{ot})_{IRS} + A_2(t - t_{ot})_{IRS}^2$	IRGP $(+A_0, +A_1, +A_2; t_{ot})$
		$t_{IRS} - t_{GLO} = A_0 + A_1(t - t_{ot})_{IRS} + A_2(t - t_{ot})_{IRS}^2$	IRGL $(+A_0, +A_1, +A_2; t_{ot})$
		$t_{IRS} - t_{GAL} = A_0 + A_1(t - t_{ot})_{IRS} + A_2(t - t_{ot})_{IRS}^2$	IRGA $(+A_0, +A_1, +A_2; t_{ot})$
SBAS	SBAS	$t_{SBAS(i)} - t_{UTC(j)} = \Delta t_{ls}^{1980} + A_0 + A_1 \cdot (t - t_{ot})_{SBAS(i)}$	SBUT $(+A_0, +A_1; t_{ot}; i; j)$ i ; SBAS ID j ; UTC ID

Where $\Delta t_{ls}^{1980} / \Delta t_{ls}^{2006}$: leap seconds since Jan.1980 / 2006; t_{ot} : reference epoch; t_{0w} : start-of-week epoch; t_{0d} : start-of-day epoch.

The reference epoch of the time offset polynomial is given in the form of a calendar date in analogy with the clock epoch of the **EPH** ephemeris records. In addition, the transmission time is provided in field 4 of line 1 to identify, at which instant the time offset information has become available in the receiver.

The reference epoch and the transmit time refer to the system time of the originating constellation, which is identified in the **STO** record header. In accord with the conventions for ephemeris data, the epoch and transmit time of STO information transmitted by GLONASS satellites should be aligned to UTC by subtracting 3 h from the respective values in Moscow Time.

5.4.10 EOP Messages for Earth Orientation Parameters

The **EOP** messages are new from the RINEX 4.00 navigation files onwards. The messages are defined in Table A34.

Earth orientation parameters (EOPs) are presently supported by four constellations: GPS, QZSS, NavIC, and BeiDou-3. In all cases pole coordinates (x , y) and ΔUT1 and the respective rates are provided for a specified reference epoch. For the GLONASS **CDMA** navigation messages, second-order derivatives are provided for all three parameters, even though the respective fields are currently populated with zero values.

The reference epoch of the **EOP** data is given in the form of a calendar date as with the clock epoch of the **EPH** ephemeris records. In addition, the transmission time of the **EOP** data is provided, at which instant the **EOP** information has become available in the receiver.

5.4.11 ION Messages for Ionosphere Model Parameters

The **ION** messages replace the previous “**IONOSPHERE CORR**” navigation message file header line(s). The ionospheric messages for the different models are defined in Table A35, Table A36, and Table A37.

To support navigation with single-frequency observations, most GNSSs transmit a system-specific set of parameters based on which navigation users can model the ionospheric slant electron content and thus correct the ionospheric path delays. The choice of model varies with constellation and navigation message type, and includes:

- The Klobuchar model used in GPS, BeiDou-2/3, QZSS, and NavIC
- The NeQuick-G model of Galileo and NeQuick-N model of NavIC
- The BDGIM model used in BeiDou-3
- The ionosphere model used in GLONASS CDMA

The Klobuchar model is jointly used by four constellations, but the model coefficients are independently determined for each of these systems. In case of regional systems such as BeiDou-2, QZSS, and NavIC, the model parameters are typically optimized for use in the respective service area. As a unique feature of QZSS, two independent sets of Klobuchar model coefficients for “wide area” (subtype WIDE) and “Japan area” (subtype JAPN) users are jointly transmitted in each of the LNAV, CNAV, and CNAV-2 messages. Similarly, NavIC transmits two independent sets of Klobuchar model coefficients (subtype KLOB) and NeQuick-N model coefficients (subtype NEQN) in the L1NV message. For other constellations, only a single parameter set is provided.

The ionosphere model parameters provided by the various GNSSs are not associated with a reference epoch or validity period.

6 RINEX FORMATTING CLARIFICATIONS

6.1 Versions

Programs developed to read RINEX files have to verify the version number and take proper action if they cannot deal with it.

Files of newer versions may look different even if they do not use any of the newer features.

6.2 Leading blanks in CHARACTER fields

When writing CHARACTER fields content should be left-justified. When reading CHARACTER fields leading and trailing white space should be discarded.

6.3 Variable-length records

In variable length records, empty data fields at the end of a record may be missing, especially in the case of the optional receiver clock offset.

6.4 Spare Fields

In view of future format evolutions, we recommend to carefully skip any fields currently defined to be Spare or left blank in the navigation message definition tables (section 8.3), because they may be assigned to new contents in future versions.

Spare fields are to be left blank so as to avoid confusion.

6.5 Missing items, duration of the validity of values

Header items that are not known at the file creation time can be set to zero or blank (Blank if Not Known/Not Defined - BNK) or the respective record may be completely omitted. Consequently, items of missing header records will be set to zero or blank by the program reading RINEX files. Trailing blanks may be truncated from the record.

Each value remains valid until changed by an additional header record.

6.6 Unknown / Undefined observation types and header records

It is a good practice for a program reading RINEX files to make sure that it properly deals with unknown observation types, header records or event flags by skipping them and/or reporting them to the user.

6.7 Floating point numbers in Observation data records

RINEX observation measures are written as floating point values with three decimals and a total field width of 14 characters (e.g. Fortran F14.3 format). Following each observation, a two-digit field for optional loss-of-lock indicator (LLI) (only for phase observation) and signal strength indicators (SSI) is provided.

Example:

PRN	code (m)	phase (cycles)
G02	22187868.655	7 116598092.03507
R09	22677458.268	6 121096420.07006

Missing observations are written as 0.0 or blanks. Phase values overflowing the fixed format F14.3 have to be clipped into the valid interval (e.g add or subtract 10**9), set bit 0 of LLI indicator.

6.7.1 Loss of lock indicator (LLI)

For phase observations only. The LLI values are three-bit codes (binary 000-111) stored as decimals 0-7. Each bit has a special meaning;

0 or blank: OK or not known.

Bit 0 set: Lost lock between previous and current observation: Cycle slip possible. For phase observations only. **Note:** Bit 0 is the least significant bit.

Bit 1 set: Half-cycle ambiguity/slip possible. Software not capable of handling half cycles should skip this observation. Valid for the current epoch only.

Bit 2 set: BOC-tracking of an MBOC-modulated signal (may suffer from increased noise).

6.7.2 Signal Strength Indicator (SSI)

Signal strength indicators are part of the code and phase observations to offer a compact quality indicator. The generation of the RINEX signal strength indicators **sn_rnx** in the data records (1 = very weak,...,9 = very strong) are standardized in case the raw signal strength **sn_raw** is given in **dBHz**:

$$\text{sn_rnx} = \text{MIN}(\text{MAX}(\text{INT}(\text{sn_raw}/6), 1), 9)$$

Table 29 : Standardized SNR Indicators

Carrier to Noise ratio (dBHz)	Carrier to Noise ratio (Observations)
N/A	0 or blank (not known, don't care)
< 12	1 (minimum signal strength)
12-17	2
18-23	3
24-29	4
30-35	5
36-41	6
42-47	7
48-53	8
≥ 54	9 (maximum signal strength)

Additionally, observation codes per signal are specified to store detailed signal strength observations ‘**Sna**’ (see Table 10 - Table 16). The **SIGNAL STRENGTH UNIT** header record can be used to indicate the units of these observations.

6.8 Floating point numbers in Navigation data records

The exponent indicator; **E**, **e**, are recommended between the fraction and exponent of all floating-point numbers for the navigation messages. The indicators; **D**, and **d** are allowed but strongly deprecated. Zero-padded two-digit exponents are required.

Examples, from different station navigation files:

```
1.266124167725E-09 2.000000000000E+00 2.069000000000E+03 1.000000000000E+00
7.304595403547E-01-1.565625000000E+01-1.559470529133E+00-9.082521180606E-10

-4.411928222656e+03-3.539047241211e+00 9.313225746155e-10 0.000000000000e+00
2.101021875000e+04 1.440399169922e+00-1.862645149231e-09 0.000000000000e+00
```

The same exponent indicator will be used throughout a navigation file (station or merged).

6.9 Units in Navigation data records

In the **EPH** Navigation Data Records angles and their derivatives transmitted in units of semi-circles and semi-circles/sec have to be converted to radians and radians/sec by the RINEX generator.

In the **ION** navigation Data Records semi-circles are not converted. ICD specific units are retained, no conversion takes place as indicated in Table A35, Table A36, and Table A37.

6.10 Navigation data stored bitwise

Some navigation parameters contain the data stored bitwise. The interpretation is as follows:

- Convert the floating-point number read from the RINEX file into the nearest integer.
- Extract the values of the requested bits from the integer.

Examples:

```
1.790000000000E+02 → 179 →10110011 ; Bits 7,5,4,1,0 are set, all others are zero
6.300000000000E+02 → 63 →111111 ; all six bits are set
5.130000000000E+02 → 513 →100000001 ; Bits 9,0 are set , all others are zero
4.800000000000E+01 → 48 →110000 ; Bits 5,4 are set , all others are zero
```

6.11 Navigation message transmission time

The transmission time (t_{tm}) in the navigation message definition tables in Section 8.3 denotes the approximate time at which the navigation data were received. It shall allow to discriminate between repetitive transmissions of the same information and is expected to refer to an instant between the beginning of the first navigation frame or message and the end of the last navigation frame or message contributing data to a given RINEX ephemeris record.

The t_{tm} is referred to the constellation specific system time (i.e. GPS time for GPS, BDS time for BDS, etc.) and given in seconds of week. Adjust by +/-604800s to align t_{tm} to the same week as of the epoch in the **SV** / **EPOCH** / **SV CLK** line.

Legacy navigation records without transmit time are permitted for compatibility with past RINEX standards, but strongly deprecated.

Provision of the transmit time is mandatory for all new navigation records introduced in RINEX 4.0.

6.12 Merged Navigation files

A merged navigation file is created by a provider that consolidates the navigation message data from several individual stations over a time period specified in the filename, or from the same individual station to create a station file covering a longer time period.

The aim of the merged navigation file is to contain a complete set of non-redundant navigation records over a specified time frame. This simplifies for the user the task of finding all the original messages over many individual files, plus some quality control can be applied to the messages and the records sorted.

Merged navigation files sorting should aim to include global messages (**STO**, **ION**, **EOP**) at the start of the file and then the **EPH** messages either sorted by constellation prn or by the **EPOCH** record dates.

Merged navigation files should indicate it in their header via the **MERGED FILE** header line, and if known include the number of files merged and the number of stations that participated in the merge. See Table A7 for exact details and an example in Table A8.

7 REFERENCES

- BeiDou Navigation Satellite, System, Signal In Space, Interface Control Document, Open Service Signal B1C, (Version 1.0), China Satellite Navigation Office, December 2017.
- BeiDou Navigation Satellite, System, Signal in Space, Interface Control Document, Open Service Signal B1I, (Version 3.0), China Satellite Navigation Office. February 2019.
- BeiDou Navigation Satellite, System, Signal in Space, Interface Control Document, Open Service Signal B2a, (Version 1.0), China Satellite Navigation Office, December 2017.
- BeiDou Navigation Satellite, System, Signal in Space, Interface Control Document, Open Service Signal B2b, (Version 1.0), China Satellite Navigation Office, July 2020.
- BeiDou Navigation Satellite, System, Signal in Space, Interface Control Document, Open Service Signal B3I, (Version 1.0), China Satellite Navigation Office. February 2018.
- Galileo Open Service, Signal-in-Space, Interface Control Document (OS SIS ICD), Issue 2.1, November 2023.
- Galileo Open Service, Service Definition Document (OS SDD), Issue 1.3, November 2023.
- GLObal NAVigation Satellite System (GLONASS), Interface Control Document, (Edition 5.1), 2008.
- Global Navigation Satellite System GLONASS, Interface Control Document, General Description of Code Division Multiple Access Signal System, Edition 1.0, 2016.
- Global Navigation Satellite System GLONASS, Interface Control Document, Code Division Multiple Access, Open Service Navigation Signal in L1 frequency band, Edition 1.0, 2016.
- Global Navigation Satellite System GLONASS, Interface Control Document, Code Division Multiple Access, Open Service Navigation Signal in L2 frequency band, Edition 1.0, 2016.
- Global Navigation Satellite System GLONASS, Interface Control Document, Code Division Multiple Access, Open Service Navigation Signal in L3 frequency band, Edition 1.0, 2016.
- Global Positioning Systems Directorate, Systems Engineering and Integration Interface Specification IS-GPS-200N, NAVSTAR GPS Space Segment/Navigation User Interfaces, 22 August 2022. (<https://www.gps.gov/technical/icwg/>)
- Global Positioning Systems Directorate, Systems Engineering and Integration Interface Specification IS-GPS-705J, NAVSTAR GPS Space Segment/User Segment L5 Interfaces, 22 August 2022. (<https://www.gps.gov/technical/icwg/>)
- Global Positioning Systems Directorate, Systems Engineering and Integration Interface Specification IS-GPS-800J, NAVSTAR GPS Space Segment/User Segment L1C Interfaces, 22 August 2022. (<https://www.gps.gov/technical/icwg/>)
- Gurtner, W. (1994): “RINEX: The Receiver-Independent Exchange Format.” GPS World, Volume 5, Number 7, July 1994.
- Gurtner, W. (2002): “RINEX: The Receiver Independent Exchange Format Version 2.10”. <https://files.igscb.org/pub/data/format/rinex210.txt>
- Gurtner, W., G. Mader (1990a): “The RINEX Format: Current Status, Future Developments.” Proceedings of the Second International Symposium of Precise Positioning with the Global Positioning system, pp. 977ff, Ottawa.

Gurtner, W., G. Mader (1990b): "Receiver Independent Exchange Format Version 2." CSTG GPS Bulletin Vol.3 No.3, Sept/Oct 1990, National Geodetic Survey, Rockville.

Gurtner, W., G. Mader, D. Arthur (1989): "A Common Exchange Format for GPS Data." CSTG GPS Bulletin Vol.2 No.3, May/June 1989, National Geodetic Survey, Rockville.

Gurtner, W., L. Estey (2002),: "RINEX Version 2.20 Modifications to Accommodate Low Earth Orbiter Data".

Gurtner, W., L. Estey (2005): "RINEX: The Receiver Independent Exchange Format Version 2.11". <https://files.igs.org/pub/data/format/rinex211.txt>

Gurtner, W., L. Estey (2007): "RINEX: The Receiver Independent Exchange Format Version 3.00".

Hatanaka, Y. (2008): "A Compression Format and Tools for GNSS Observation Data". Bulletin of the Geographical Survey Institute, Vol. 55, pp 21-30, Tsukuba, March 2008. <https://www.gsi.go.jp/ENGLISH/Bulletin55.html>

IERS DOMES number request service (https://itrf.ign.fr/domes_request.php)

Indian Regional Navigation Satellite System Signal in Space ICD for Standard Positioning Service, Version 1.1, August 2017, Indian Space Research Organization, Bangalore.

NavIC Signal in Space ICD for Standard Positioning Service in L1 Frequency, Version 1.0, August 2023, ISRO-NAVIC-ICD-SPS-L1-1.0, Indian Space Research Organization, Bangalore.

Quasi-Zenith Satellite System, Interface Specification, Centimeter Level Augmentation Service (IS-QZSS-L6-004), Cabinet Office, July 14, 2021.

Quasi-Zenith Satellite System, Interface Specification, Positioning Technology Verification Service (IS-QZSS-TV-003), Cabinet Office, December 27, 2019.

Quasi-Zenith Satellite System, Interface Specification, Satellite Positioning, Navigation and Timing Service (IS-QZSS-PNT-004), Cabinet Office, January 25, 2021.

Quasi-Zenith Satellite System, Interface Specification, Satellite Positioning, Navigation and Timing Service (IS-QZSS-PNT-005), Cabinet Office, October 24, 2022.

Quasi-Zenith Satellite System, Interface Specification, Sub-meter Level Augmentation Service (IS-QZSS-L1S-004), Cabinet Office, December 27, 2019.

Ray, J., W. Gurtner. M. Coleman (2017): "RINEX Extensions to Handle Clock Information". https://www.igs.org/wp-content/uploads/2020/10/rinex_clock304.txt

Romero, I., Ruddick, R., (2020): "RINEX 2.11 Compression Method Clarification Addendum" https://kb.igs.org/hc/article_attachments/360063352932/Addendum_rinex211.pdf

Rothacher, M., R. Schmid (2010): "ANTEX: The Antenna Exchange Format Version 1.4". <https://www.igs.org/wp-content/uploads/2020/10/antex14.txt>

RTCA DO-229F, June 2020, Appendix A. Minimum Operational Performance Standards (MOPS) for Global Positioning System/Satellite-Based Augmentation System Airborne Equipment.

RTCM Standard 10403.3 with amendment 1, Differential GNSS (Global Navigation Satellite Systems) Services – Version 3 with amendment 1, April 28, 2020.

Schaer, S., W. Gurtner, J. Feltens (1998): "IONEX: The Ionosphere Map Exchange

Format Version 1“.<https://www.igs.org/wp-content/uploads/2020/10/ionex1.pdf>

Suard, N., W. Gurtner, L. Estey (2004): “Proposal for a new RINEX-type Exchange File for GEO SBAS Broadcast Data”. https://files.igs.org/pub/data/format/geo_sbas.txt

8 APPENDIX: RINEX FORMAT DEFINITIONS AND EXAMPLES

8.1 RINEX Long Filenames

The file naming and compression recommendations are strictly speaking not part of the RINEX format definition as described in section 5.1.

Modern operating systems support 255-character file names and thus RINEX has evolved to a file naming convention that is more descriptive, flexible and extensible.

Figure 2 lists the filename elements from the RINEX 3.02 onwards;

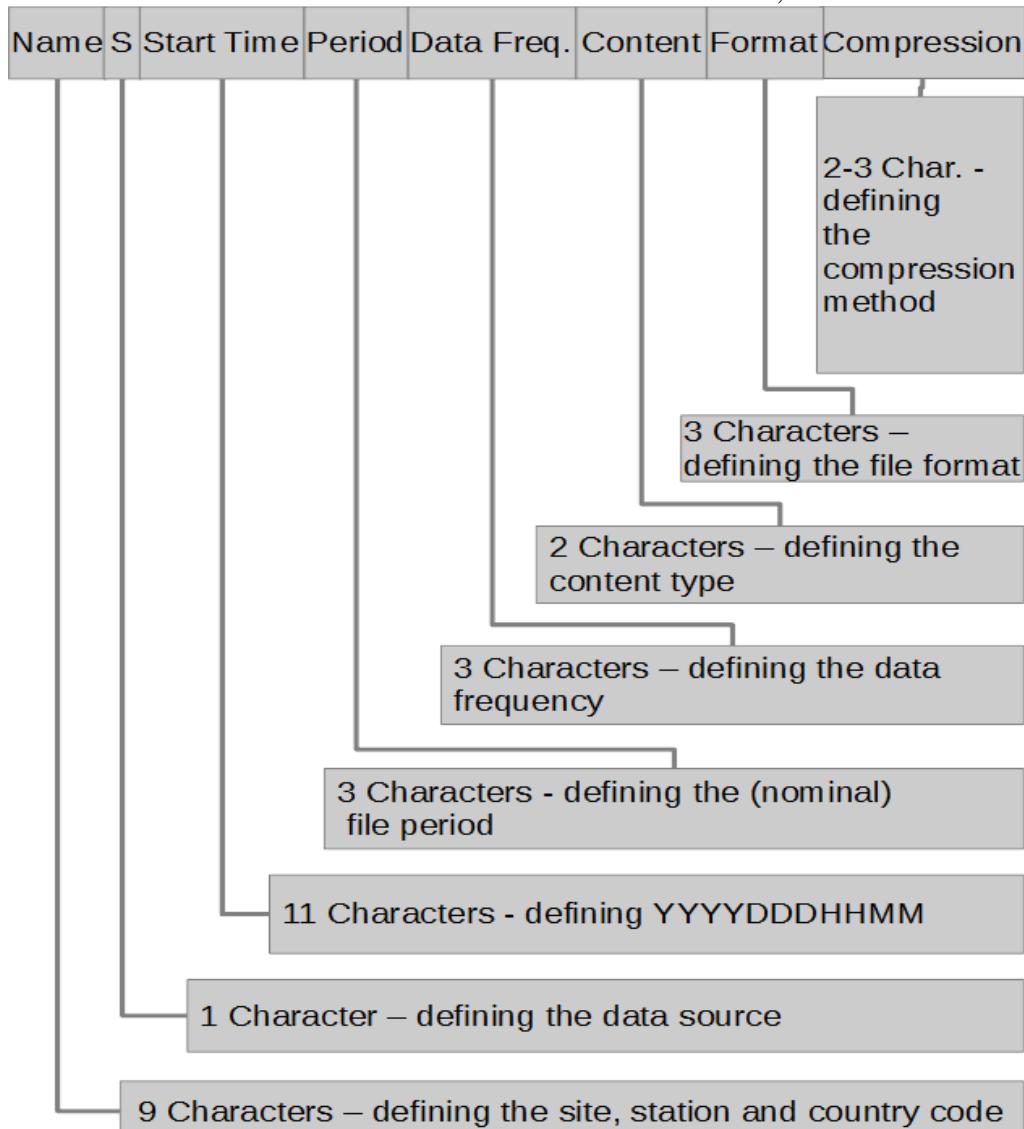


Figure 2: RINEX Long filename parameters.

All elements of the main body of the file name must contain capital ASCII letters or numbers and all elements are fixed length and are separated by an underscore “_”. The file type and compression fields (extension) use a period “.” as a separator and must be ASCII characters and lower case. Fields must be padded with zeros to fill the field width. The file compression field is optional.

In order to further reduce the size of observation files, Dr. Yuki Hatanaka developed a compression scheme that takes advantage of the structure of the RINEX observation data by forming higher-order differences in time between observations of the same type and satellite. This compressed file is also an ASCII file that is subsequently compressed again using standard compression programs.

More information on the Hatanaka compression scheme can be found in:

<https://terras.gsi.go.jp/ja/crx2rnx.html>

- IGSMails 1525,1686,1726,1763,1785,4967,4969,4975

The file naming and compression recommendations are strictly speaking not part of the RINEX format definition. However, they significantly facilitate the exchange of RINEX data in large user communities like IGS, EUREF, APREF, SIRGAS, etc.

Table A1 : RINEX Filename Description

TABLE A1 RINEX FILENAME DESCRIPTION				
Field	Field Description	Example	Required	Comment/Example
<SITE/ STATION- MONUMENT/ RECEIVER/ COUNTRY or REGION>	XXXXMRC <small>CC</small> Where: XXXX - 4 character site designation M – monument or marker number (0-9) R – receiver number (0-9) CCC – ISO Country or Region code (Total 9 characters)	ALGO00CAN	Yes	File name supports a maximum of 10 monuments at the same station and a maximum of 10 receivers per monument. Country or Region code to follow: ISO 3166-1 alpha-3
<DATA SOURCE>	Data Source R – From Receiver data using vendor or other software S – From data Stream (RTCM or other) U – Unknown (1 character)	R	Yes	This field is used to indicate how the data was collected either from the receiver at the station or from a data stream
<START TIME>	YYYYDDDHHMM YYYY – Gregorian year 4 digits, DDD – day of Year, HHMM – hours and minutes of day (11 characters)	2012150 1200	Yes	For GPS files use: GPS Year, day of year, hour of day, minute of day (see text below for details) Start time should be the nominal start time of the first observation. GLONASS, Galileo, BeiDou, etc use respective system time.
<FILE PERIOD>	DDU DD – file period U – units of file period. File period is used to specify intended collection period of the file.	15M	Yes	File Period 15M–15 Minutes 01H–1 Hour 01D–1 Day 01Y–1 Year 00U-Unspecified

TABLE A1
RINEX FILENAME DESCRIPTION

Field	Field Description	Example	Required	Comment/Example
	(3 characters)			
<DATA FREQ>	DDU DD – data frequency U – units of data rate (3 characters)	05Z	Mandatory for RINEX Obs. Data. NOT required for Navigation Files.	XXC – 100 Hertz XXZ – Hertz, XXS – Seconds, XXM – Minutes, XXH – Hours, XXD – Days XXU – Unspecified
<DATA TYPE >	DD DD – Data type (2 characters)	MO	Yes	<p>Two characters represent the data type:</p> <p>MO - Mixed Obs. (All GNSS Constellations tracked) GO - GPS Obs. RO - GLONASS Obs. EO - Galileo Obs. JO - QZSS Obs. CO - BDS Obs. IO - NavIC Obs. SO - SBAS Obs.</p> <p>MN - Mixed Nav. (All GNSS Constellations tracked) GN - GPS Nav. RN - GLONASS Nav. EN - Galileo Nav. JN - QZSS Nav. CN - Beidou Nav. IN - NavIC Nav. SN - SBAS Nav.</p> <p>MM-Meteorological Observation</p>
<FORMAT>	FFF FFF – File format (3 characters)	rnx	Yes	<p>Three characters indicating the data format:</p> <p>rnx – RINEX file crx - Hatanaka Compressed RINEX file</p>
<COMPRESSION>	(2-3 Characters)	gz, bz2, zip	No	Suggested to use gzip, but other options are of course bzip2 and zip , for example.
Sub Total	34 or 35			Fields
Separators	(7 characters –Obs. File) (6 characters –Nav. File)			_ underscore between all fields and “.” Between data type and file format and the compression method
Total	41-42(Obs. File) 37-38 (Nav. File)			Mandatory IGS RINEX obs. Characters

Filename Details and Examples:

<STATION/PROJECT NAME>: IGS users should follow XXXXMRC_{CCC} (9 char) site and station naming convention described above.

GNSS industry users could use the 9 characters to indicate the project name and/or number.

<DATA SOURCE>: With real-time data streaming RINEX files for the same station can be created at many locations. If the RINEX file is derived from data collected at the receiver (official file) then the source is specified as R. On the other hand if the RINEX file is derived from a real-time data stream then the data source is marked as S to indicate Streamed data source. If the data source is unknown the source is marked as U.

<START TIME>: The start time is the file start time which should coincide with the first observation in the file. GPS file start time is specified in GPS Time. Mixed observation file start times are defined in the same system time as the file observation system time specified in the header. Files containing only: GLONASS, Galileo, QZSS, BDS or SBAS observations are all based on their respective system time.

<FILE PERIOD>: Is used to specify the data collection period of the file.

GNSS observation file name - file period examples:

ALGO00CAN_R_20121601000_15M_01S_GO.rnx.gz //15 min, GPS Obs. 1 sec.
 ALGO00CAN_R_20121601000_01H_05Z_MO.rnx.gz //1 hour, Obs Mixed and 5Hz
 ALGO00CAN_R_20121600000_01D_30S_GO.rnx.gz //1 day, Obs GPS and 30 sec
 ALGO00CAN_R_20121600000_01D_30S_MO.rnx.gz //1 day, Obs. Mixed, 30 sec

GNSS mixed navigation file name - file period examples:

ALGO00CAN_R_20121600000_15M_MN.rnx.gz // 15-minute mixed nav file
 ALGO00CAN_R_20121600000_01H_MN.rnx.gz // 1 hour mixed nav file
 ALGO00CAN_R_20121600000_01D_MN.rnx.gz // 1 day mixed nav file

<DATA FREQ>: Used to distinguish between observation files that cover the same period but contain data at a different sampling rate. GNSS data file - observation frequency examples:

ALGO00CAN_R_20121601000_01D_01C_GO.rnx.gz //100 Hz data rate
 ALGO00CAN_R_20121601000_01D_05Z_RO.rnx.gz //5 Hz data rate
 ALGO00CAN_R_20121601000_01D_01S_EO.rnx.gz //1 second data rate
 ALGO00CAN_R_20121601000_01D_05M_JO.rnx.gz //5 minute data rate
 ALGO00CAN_R_20121601000_01D_01H_CO.rnx.gz //1 hour data rate
 ALGO00CAN_R_20121601000_01D_01D_SO.rnx.gz //1 day data rate
 ALGO00CAN_R_20121601000_01D_00U_MO.rnx.gz //Unspecified

Note: Data frequency field not required for RINEX Navigation files.

<DATA TYPE/ FORMAT>: The data type describes the content of the file. The first character indicates constellation and the second indicates whether the files contain observations or navigation data. The next three-character extension indicates the data file format. GNSS observation filename - format/data type examples:

```
ALGO00CAN_R_20121601000_15M_01S_GO.rnx.gz //RINEX obs. GPS
ALGO00CAN_R_20121601000_15M_01S_RO.rnx.gz //RINEX obs. GLONASS
ALGO00CAN_R_20121601000_15M_01S_EO.rnx.gz //RINEX obs. Galileo
ALGO00CAN_R_20121601000_15M_01S_JO.rnx.gz //RINEX obs. QZSS
ALGO00CAN_R_20121601000_15M_01S_CO.rnx.gz //RINEX obs. BDS
ALGO00CAN_R_20121601000_15M_01S_SO.rnx.gz //RINEX obs. SBAS
ALGO00CAN_R_20121601000_15M_01S_MO.rnx.gz //RINEX obs. mixed
```

GNSS navigation filename examples:

```
ALGO00CAN_R_20121600000_01H_MN.rnx.gz //RINEX nav. Mixed
ALGO00CAN_R_20121600000_01H_GN.rnx.gz //RINEX nav. GPS
ALGO00CAN_R_20121600000_01H_RN.rnx.gz //RINEX nav. GLONASS
ALGO00CAN_R_20121600000_01H_EN.rnx.gz //RINEX nav. Galileo
ALGO00CAN_R_20121600000_01H_JN.rnx.gz //RINEX nav. QZSS
ALGO00CAN_R_20121600000_01H_CN.rnx.gz //RINEX nav. BDS
ALGO00CAN_R_20121600000_01H_SN.rnx.gz //RINEX nav. SBAS
```

Meteorological filename example:

```
ALGO00CAN_R_20121600000_01D_30M_MM.rnx.gz //RINEX Met.
```

<COMPRESSION>:

Suggested RINEX file compression methods include: gzip - “.gz”, bzip2 - “.bz2” and “.zip”.

Note: The main body of the file name should contain only ASCII capital letters and numbers. The file extension and compression i.e.; “.rnx.gz” should be lowercase.

8.2 GNSS Observation Data Files

Table A2 : GNSS Observation Data File – Header Section Description

TABLE A2 GNSS OBSERVATION DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
RINEX VERSION / TYPE	<ul style="list-style-type: none"> – Format version: 4 . 02 – File type: O for Observation Data – Satellite System: G: GPS R: GLONASS E: Galileo J: QZSS C: BDS I: NavIC S: SBAS payload M: Mixed 	F9.2, 11X A1,19X A1,19X
PGM / RUN BY / DATE	<ul style="list-style-type: none"> – Name of program creating current file – Name of agency creating current file – Date and time of file creation (section 5.2.2) Format: yyyyymmdd hhmmss zone zone: 3-4 char. code for time zone. 'UTC' recommended! 'LCL' if local time with unknown time code <p>Note: This header line must be the second line in the header. Additional lines of this type can appear together after the second line, if needed to preserve the history of previous actions on the file.</p>	A20 A20 A20
*COMMENT	<ul style="list-style-type: none"> – Comment header line(s) 	A60
MARKER NAME	<ul style="list-style-type: none"> – Name of antenna marker <p>Note: This is a free text field to identify the station with a name as decided by the station operator. To facilitate the identification of RINEX data in large user communities like IGS, EUREF, APREF, SIRGAS, etc the 9-character station ID is expected; XXXXMRC<small>CC</small> (see Table A1)</p>	A60

TABLE A2 GNSS OBSERVATION DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
*MARKER NUMBER	<ul style="list-style-type: none"> - Number of antenna marker <p>Note: This is an optional free text field to identify the station with some numbering system as decided by the station operator.</p> <p>To facilitate the identification of RINEX data in large user communities like IGS, EUREF, APREF, SIRGAS, etc the IERS DOMES number assigned to the station marker is expected;</p> <p style="text-align: center;">https://itrf.ign.fr/domes_request.php</p>	A20
MARKER TYPE	<ul style="list-style-type: none"> - Type of the marker (also see 5.2.3): <ul style="list-style-type: none"> GEODETIC : Earth-fixed, high- precision monument NON_GEODETIC : Earth-fixed, low- precision monument NON_PHYSICAL : Generated from network processing SPACEBORNE : Orbiting space vehicle GROUND_CRAFT : Mobile terrestrial vehicle WATER_CRAFT : Mobile water craft AIRBORNE : Aircraft, balloon, etc. FIXED_BUOY : "Fixed" on water surface FLOATING_BUOY : Floating on water surface FLOATING_ICE : Floating ice sheet, etc. GLACIER : "Fixed" on a glacier BALLISTIC : Rockets, shells, etc. ANIMAL : Animal carrying a receiver HUMAN : Human being <p>Record required except for GEODETIC and NON_GEODETIC marker types. Users may define other project-dependent keywords.</p>	A20,40X
OBSERVER / AGENCY	<ul style="list-style-type: none"> - Name of Observer / Agency 	A20,A40
REC # / TYPE / VERS	<ul style="list-style-type: none"> - Receiver number, type, and version (Version: e.g. Internal Software Version) 	3A20
ANT # / TYPE	<ul style="list-style-type: none"> - Antenna number and type 	2A20
APPROX POSITION XYZ	<ul style="list-style-type: none"> - Geocentric approximate marker position (Units: Meters, Frame: ITRF recommended) - Optional for moving platforms 	3F14.4

TABLE A2 GNSS OBSERVATION DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
ANTENNA: DELTA H/E/N	<ul style="list-style-type: none"> – Antenna height: Height of the antenna reference point (ARP) above the marker – Horizontal eccentricity of ARP relative to the marker (east/north) <p>All units in meters (see section 5.2.4)</p>	F14.4 2F14.4
*ANTENNA: DELTA X/Y/Z	<ul style="list-style-type: none"> - Position of antenna reference point for antenna on vehicle (m): XYZ vector in body-fixed coordinate system (see section 5.2.7) 	3F14.4
*ANTENNA: PHASECENTER	<p>Average phase center position with respect to antenna reference point (m) (see section 5.2.5)</p> <ul style="list-style-type: none"> – Satellite system (G/R/E/J/C/I/S) – Observation code – North/East/Up (fixed station) or X/Y/Z in body-fixed system (vehicle) 	A1 1X,A3 F9.4 2F14.4
*ANTENNA: B.SIGHT XYZ	<ul style="list-style-type: none"> – Direction of the “vertical” antenna axis towards the GNSS satellites. <p>Antenna on vehicle: Unit vector in body-fixed coordinate system. Tilted antenna on fixed station: Unit vector in N/E/Up left-handed system.</p>	3F14.4
*ANTENNA: ZERODIR AZI	<ul style="list-style-type: none"> – Azimuth of the zero-direction of a fixed antenna (degrees, from north) 	F14.4
*ANTENNA: ZERODIR XYZ	<ul style="list-style-type: none"> – Zero-direction of antenna <p>Antenna on vehicle: Unit vector in body-fixed coordinate system Tilted antenna on fixed station: Unit vector in N/E/Up left-handed system</p>	3F14.4
*CENTER OF MASS: XYZ	<ul style="list-style-type: none"> – Current center of mass (X,Y,Z, meters) of vehicle in body-fixed coordinate system. Same system as used for attitude. (see section 5.2.7) 	3F14.4
*DOI	<ul style="list-style-type: none"> – Digital Object Identifier (DOI) for data citation i.e. <a href="https://doi.org/<DOI-number>">https://doi.org/<DOI-number> 	A60
*LICENSE OF USE	<ul style="list-style-type: none"> – Line(s) with the data license of use. Name of the license plus link to the specific version of the license. Using standard data license as from https://creativecommons.org/licenses/ – i.e. : CC BY 04 ; https://creativecommons.org/licenses/by/4.0/ 	A60

TABLE A2 GNSS OBSERVATION DATA FILE - HEADER SECTION DESCRIPTION																																																														
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT																																																												
*STATION INFORMATION	<ul style="list-style-type: none"> - Line(s) with the link(s) to persistent URL with the station metadata (site log, GeodesyML, etc) 	A60																																																												
SYS / # / OBS TYPES	<ul style="list-style-type: none"> - Satellite system code (G/R/E/J/C/I/S) - Number of different observation types for the specified satellite system - Observation descriptors: Type, Band, Attribute - Use continuation line(s) for more than 13 observation descriptors. <p>In mixed files: Repeat for each satellite system. These records should precede any SYS / SCALE FACTOR records (see below).</p> <p>The following observation descriptors are defined in RINEX 4:</p> <p>Type:</p> <ul style="list-style-type: none"> C = Code / Pseudorange L = Phase D = Doppler S = Raw signal strength (carrier to noise ratio) X = Receiver channel numbers <p>Band:</p> <table style="margin-left: 20px;"> <tr> <td>1 =</td> <td>L1</td> <td>(GPS, QZSS, SBAS, BDS, NavIC)</td> </tr> <tr> <td></td> <td>G1</td> <td>(GLO)</td> </tr> <tr> <td></td> <td>E1</td> <td>(GAL)</td> </tr> <tr> <td></td> <td>B1C/B1A</td> <td>(BDS)</td> </tr> <tr> <td>2 =</td> <td>L2</td> <td>(GPS, QZSS)</td> </tr> <tr> <td></td> <td>G2</td> <td>(GLO)</td> </tr> <tr> <td></td> <td>B1</td> <td>(BDS)</td> </tr> <tr> <td>3 =</td> <td>G3</td> <td>(GLO)</td> </tr> <tr> <td>4 =</td> <td>G1a</td> <td>(GLO)</td> </tr> <tr> <td>5 =</td> <td>L5</td> <td>(GPS, QZSS, SBAS, NavIC)</td> </tr> <tr> <td></td> <td>E5a</td> <td>(GAL)</td> </tr> <tr> <td></td> <td>B2a</td> <td>(BDS)</td> </tr> <tr> <td>6 =</td> <td>E6</td> <td>(GAL)</td> </tr> <tr> <td></td> <td>L6</td> <td>(QZSS)</td> </tr> <tr> <td></td> <td>B3/B3A</td> <td>(BDS)</td> </tr> <tr> <td></td> <td>G2a</td> <td>(GLO)</td> </tr> <tr> <td>7 =</td> <td>E5b</td> <td>(GAL)</td> </tr> <tr> <td></td> <td>B2/B2b</td> <td>(BDS)</td> </tr> <tr> <td>8 =</td> <td>E5a+b</td> <td>(GAL)</td> </tr> <tr> <td></td> <td>B2a+b</td> <td>(BDS)</td> </tr> </table>	1 =	L1	(GPS, QZSS, SBAS, BDS, NavIC)		G1	(GLO)		E1	(GAL)		B1C/B1A	(BDS)	2 =	L2	(GPS, QZSS)		G2	(GLO)		B1	(BDS)	3 =	G3	(GLO)	4 =	G1a	(GLO)	5 =	L5	(GPS, QZSS, SBAS, NavIC)		E5a	(GAL)		B2a	(BDS)	6 =	E6	(GAL)		L6	(QZSS)		B3/B3A	(BDS)		G2a	(GLO)	7 =	E5b	(GAL)		B2/B2b	(BDS)	8 =	E5a+b	(GAL)		B2a+b	(BDS)	A1 2X,I3 13(1X,A3) 6X, 13(1X,A3)
1 =	L1	(GPS, QZSS, SBAS, BDS, NavIC)																																																												
	G1	(GLO)																																																												
	E1	(GAL)																																																												
	B1C/B1A	(BDS)																																																												
2 =	L2	(GPS, QZSS)																																																												
	G2	(GLO)																																																												
	B1	(BDS)																																																												
3 =	G3	(GLO)																																																												
4 =	G1a	(GLO)																																																												
5 =	L5	(GPS, QZSS, SBAS, NavIC)																																																												
	E5a	(GAL)																																																												
	B2a	(BDS)																																																												
6 =	E6	(GAL)																																																												
	L6	(QZSS)																																																												
	B3/B3A	(BDS)																																																												
	G2a	(GLO)																																																												
7 =	E5b	(GAL)																																																												
	B2/B2b	(BDS)																																																												
8 =	E5a+b	(GAL)																																																												
	B2a+b	(BDS)																																																												

TABLE A2 GNSS OBSERVATION DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
	<p>9 = S (NavIC)</p> <p>Attribute:</p> <p>A = A channel (GAL, NavIC, GLO) B = B channel (GAL, NavIC, GLO) C = C channel (GAL, NavIC) C/A code-based (GPS,GLO,QZSS, SBAS)</p> <p>D = Semi-codeless (GPS) Data Channel (BDS, QZSS, NavIC)</p> <p>E = C/B (QZSS) E channel (QZSS)</p> <p>I = I channel (GPS, GAL, QZSS, BDS)</p> <p>L = L channel (L2C GPS, QZSS) P channel (GPS, QZSS)</p> <p>M = M code-based (GPS)</p> <p>N = Codeless (GPS)</p> <p>P = P code-based (GPS, GLO) Pilot Channel (BDS, NavIC)</p> <p>Q = Q channel (GPS,GAL,QZSS,BDS)</p> <p>R = R channel (GPS)</p> <p>S = D channel (GPS, QZSS, NavIC) M channel (L2C GPS, QZSS)</p> <p>W = Based on Z-tracking (GPS)(see text)</p> <p>X = B+C channels (GAL, NavIC) I+Q channels (GPS,GAL, QZSS,BDS) M+L channels (GPS, QZSS) D+P channels (GPS, QZSS, BDS, NavIC)</p> <p>Y = Y code-based (GPS)</p> <p>Z = A+B+C channels (GAL) D+P channels (BDS) I+Q channels. (QZSS) D+E channels. (QZSS)</p> <p>All characters in uppercase only!</p> <p>Units:</p> <p>Phase; cycles Pseudorange; meters Doppler; Hz SNR etc.; receiver-dependent Channel #; See 5.3.4</p> <p>Sign definition: See text.</p>	

TABLE A2 GNSS OBSERVATION DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
	<p>The sequence of the observations in the observation records has to correspond to the sequence of the types in this record of the respective satellite system. (see section 5.3)</p> <p>Note: In RINEX 4, all fields (Type, Band and Attribute) must be defined, only known tracking mode attributes are allowed (except for observation Type ‘X’ which has attribute of blank, see section 5.3.4).</p>	
*SIGNAL STRENGTH UNIT	<ul style="list-style-type: none"> – Unit of the carrier to noise ratio observables Snn (if present) DBHZ : S/N given in dBHz 	A20,40X
*INTERVAL	<ul style="list-style-type: none"> – Observation interval in seconds 	F10.3
TIME OF FIRST OBS	<ul style="list-style-type: none"> – Time of first observation record (4-digit-year, month, day, hour, min, sec) – System time (see section 5.2.8): <ul style="list-style-type: none"> GPS (=GPS system time) GLO (=UTC system time) GAL (=Galileo system time) QZS (= QZSS system time) BDT (= BDS system time) IRN (=NavIC system time) <p>Compulsory in Mixed GNSS files.</p> <p>Default values for single system GNSS files (not compulsory):</p> <ul style="list-style-type: none"> GPS for pure GPS files GLO for pure GLONASS files GAL for pure Galileo files QZS for pure QZSS files BDT for pure BDS files IRN for pure NavIC files 	5I6,F13.7 5X,A3
*TIME OF LAST OBS	<ul style="list-style-type: none"> – Time of last observation record (4-digit-year, month, day, hour, min, sec) – System time: Same value as in TIME OF FIRST OBS record (see section 5.2.8). 	5I6,F13.7 5X,A3
*RCV CLOCK OFFS APPL	<ul style="list-style-type: none"> – Epoch, code, and phase are corrected by applying the real-time-derived receiver clock offset: 1=yes, 0=no; default: 0=no (see section 5.2.14) 	I6

TABLE A2 GNSS OBSERVATION DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
	<p>Note: Record required if clock offsets are reported in the EPOCH observation data file record (see Table A3).</p>	
*SYS / DCBS APPLIED	<ul style="list-style-type: none"> – Satellite system (G/R/E/J/C/I/S) – Program name used to apply differential code bias corrections – Source of corrections (URL) <p>Repeat for each satellite system. No corrections applied: Blank fields or record not present.</p>	A1 1X,A17 1X,A40
*SYS / PCVS APPLIED	<ul style="list-style-type: none"> – Satellite system (G/R/E/J/C/I/S) – Program name used to apply phase center variation corrections – Source of corrections (URL) <p>Repeat for each satellite system. No corrections applied: Blank fields or record not present.</p>	A1 1X,A17 1X,A40
*SYS / SCALE FACTOR	<ul style="list-style-type: none"> – Satellite system (G/R/E/J/C/I/S) – Factor to divide stored observations with before use (1,10,100,1000) – Number of observation types involved. 0 or blank: All observation types – List of observation types – Use continuation line(s) for more than 12 observation types. <p>Repeat record if different factors are applied to different observation types. A value of 1 is assumed if record is missing. (see section 5.2.11)</p>	A1 1X,I4 2X,I2 12(1X,A3) 10X 12(1X,A3)
*SYS / PHASE SHIFT	<p>Note: This header line is strongly deprecated. It is allowed in this version for compatibility with previous RINEX versions but the lines should be ignored by RINEX decoders and encoders. (see section 5.2.12)</p> <p>Phase shift correction used to generate phases consistent with respect to cycle shifts</p> <ul style="list-style-type: none"> – Satellite system (G/R/E/J/C/I/S) – Carrier phase observation code: Type 	A1,1X A3,1X

TABLE A2 GNSS OBSERVATION DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
	<p>Band Attribute</p> <ul style="list-style-type: none"> – Correction applied (cycles) or blank if none – Number of satellites involved 0 or blank: All satellites of system – List of satellites – Use continuation line(s) for more than 10 satellites. 	F8.5 2X,I2.2 10(1X,A3) 18X 10(1X,A3)
GLONASS SLOT / FRQ #	<p>GLONASS slot and frequency numbers</p> <ul style="list-style-type: none"> – Number of satellites in list <p>List of:</p> <ul style="list-style-type: none"> – Satellite numbers (system code, slot) – Frequency numbers (-7...+6) – Use continuation lines for more than 8 Satellites 	I3,1X 8(A1,I2.2, 1X,I2,1X) 4X,8(A1, I2.2,1X,I2, 1X)
*GLONASS COD/PHS/BIS	<p>Note: This header line is strongly deprecated. It is allowed in this version for compatibility with previous RINEX versions but the lines should be ignored by RINEX decoders and encoders. (see section 5.2.16)</p> <ul style="list-style-type: none"> – GLONASS Phase bias correction used to align code and phase observations. <ul style="list-style-type: none"> • GLONASS signal identifier: C1C and Code Phase bias correction (meters) • GLONASS signal identifier: C1P and Code Phase bias correction (meters) • GLONASS signal identifier: C2C and Code Phase bias correction (meters) • GLONASS signal identifier: C2P and Code Phase bias correction (meters) <p>Note: See section 5.2.16 for further details. If the GLONASS code phase bias correction values are unknown or 0.00 then this optional header line should be omitted.</p>	4(X1,A3,X 1,F8.3)

TABLE A2 GNSS OBSERVATION DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
*LEAP SECONDS	<ul style="list-style-type: none"> – Current Number of leap seconds since 6 Jan 1980. – Future or past leap seconds Δt_{LSF}, i.e. future leap second if the week and day number are in the future. (BNK) – Respective week number WN_LSF (continuous number) (BNK), weeks since 6-Jan-1980. – Respective day number (1-7) (BNK). – System time identifier: only GPS is valid identifier. Blank defaults to GPS, see Notes section below. <p><i>Notes:</i></p> <ol style="list-style-type: none"> 1. GPS, GAL, QZS and IRN system times are aligned and equivalent with respect to leap seconds (Leap seconds since 6-Jan-1980). See the ICD reference; IS-GPS-200M, section 20.3.3.5.2.4 2. When generating the leap second record from BDS navigation data the week count and day number must be adapted to GPS/GAL/QZS/IRN leap second conventions. 	I6 I6 I6 I6 A3
*# OF SATELLITES	<ul style="list-style-type: none"> – Number of satellites, for which observations are stored in the file 	I6
*PRN / # OF OBS	<ul style="list-style-type: none"> – Satellite IDs, number of observations for each observation type indicated in the SYS / # / OBS TYPES record. – If more than 9 observation types: Use continuation line(s) In order to avoid format overflows, 99999 indicates ≥ 99999 observations in the RINEX file. These records are repeated for each satellite in the data file. 	3X A1,I2.2 9I6 6X,9I6
END OF HEADER	Last record in the header section.	60X

Records marked with * are optional

BNK- Blank if Not Known/Not Defined

Table A3 : GNSS Observation Data File – Data Record Description

TABLE A3 GNSS OBSERVATION DATA FILE – DATA RECORD DESCRIPTION	
DESCRIPTION	FORMAT
EPOCH record	
<ul style="list-style-type: none"> – Record start identifier : > Epoch : – year (4 digits) – month, day, hour, min (two digits) – second (last digit floored, not rounded to 0.1 microsec, in case of additional second digits used) – Epoch flag; <ul style="list-style-type: none"> 0 : OK 1 : power failure between previous and current epoch >1 : Special event (see below) – Number of satellites observed in current epoch – (reserved) – Receiver clock offset estimate (seconds, optional, see section 4.3) – Additional 5 digits to append to ‘seconds’ yielding pico-sec Epoch resolution, with leading zeros if needed (optional) 	A1 1X,I4 4(1X,I2.2) F11.7 2X,I1 I3 6X F15.12 1X,I5.5
Epoch flag = 0 or 1: OBSERVATION records follow	A1,I2.2 m(F14.3, I1, I1)
This record is repeated for each satellite having been observed in the current epoch. The record length is given by the number of observation types for this satellite. For observations formatting see section 6.7.	
Notes (see also section 6.7):	
<ol style="list-style-type: none"> 1. Loss of Lock Indicator (LLI) should only be associated with the phase observation. 2. Signal Strength Indicator (SSI) is deprecated and should be replaced by a defined SNR field for each signal. However, if this is not possible/practical then SSI should be specified for each phase signal type for example. GPS: L1C, L1W, L2W, L2X and L5X. 3. If only the pseudorange measurements are observed then the SSI should be associated with the code measurements. 	
Epoch flag 2-5: EVENT : <i>Special records</i> may follow	2X,I1
<ul style="list-style-type: none"> – Epoch flag; (additionally see section 5.3.2) <ul style="list-style-type: none"> • 2: start moving antenna • 3: new site occupation (end of kinematic data) (at least MARKER NAME record follows) • 4: header information follows • 5: external event (epoch is significant, same time frame as 	

TABLE A3 GNSS OBSERVATION DATA FILE – DATA RECORD DESCRIPTION	
<ul style="list-style-type: none"> observation time tags) <p>– "Number of satellites" contains number of special records to follow. 0 if no special records follow. Maximum number of records: 999</p>	I3
For events without significant epoch the epoch fields in the EPOCH RECORD can be left blank	
<p>Epoch flag = 6: EVENT: Cycle slip records follow</p> <ul style="list-style-type: none"> – Epoch flag <ul style="list-style-type: none"> • 6: cycle slip records follow to optionally report detected and repaired cycle slips (same format as OBSERVATIONS records; <ul style="list-style-type: none"> • slip instead of observation; • LLI and signal strength blank or zero) 	2X,I1

Table A4 : GNSS Observation Data File – Example #1

```
+-----+
|          TABLE A4
|          GNSS OBSERVATION DATA FILE - EXAMPLE #1
+-----+

-----1|0---|---2|0---|---3|0---|---4|0---|---5|0---|---6|0---|---7|0---|---8|
 4.02          OBSERVATION DATA      M          RINEX VERSION / TYPE
XXRINEXO V9.9      AIUB          20060324 144333 UTC PGM / RUN BY / DATE
The file contains L1 pseudorange and phase data of the           COMMENT
geostationary AOR-E satellite (PRN 120 = S20)           COMMENT
A 9080          MARKER NAME
9080.1.34        MARKER NUMBER
BILL SMITH        ABC INSTITUTE
X1234A123        GEODETIC          1.3.1        OBSERVER / AGENCY
G1234          ROVER
4375274.        587466.        4589095.        REC # / TYPE / VERS
          .9030        .0000        .0000        ANT # / TYPE
          0
G 5 C1C L1W L2W C1W S2W        APPROX POSITION XYZ
R 2 C1C L1C
E 2 L1B L5I
S 2 C1C L1C
          18.000        INTERVAL
G APPL_DCBA      xyz.uvw.abc//pub/dcbl_gps.dat        SYS / DCBS APPLIED
DBHZ
2006   03     24    13    10   36.0000000        SIGNAL STRENGTH UNIT
          GPS
          TIME OF FIRST OBS
          18 R01  1 R02  2 R03  3 R04  4 R05  5 R06  -6 R07  -5 R08  -4 GLONASS SLOT / FRQ #
          R09  -3 R10  -2 R11  -1 R12  0 R13  1 R14  2 R15  3 R16  4 GLONASS SLOT / FRQ #
          R17  5 R18  -5 GLONASS SLOT / FRQ #
          C1C  -10.000 C1P  -10.123 C2C  -10.432 C2P  -10.634 GLONASS COD/PHS/BIS
          END OF HEADER
> 2006 03 24 13 10 36.0000000  0  5  -0.123456789012 12345
G06  23629347.915  .300  8  -.353  4  23629347.158  24.158
G09  20891534.648  -.120  9  -.358  6  20891545.292  38.123
G12  20607600.189  -.430  9  .394  5  20607600.848  35.234
E11  .324  8  .178  7
S20  38137559.506  335849.135 9
> 2006 03 24 13 10 54.0000000  0  7  -0.123456789210 67890
G06  23619095.450  -53875.632 8  -41981.375 4  23619095.008  25.234
```

G09	20886075.667	-28688.027	9	-22354.535	7	20886076.101	42.231
G12	20611072.689	18247.789	9	14219.770	6	20611072.410	36.765
R21	21345678.576	12345.567	5				
R22	22123456.789	23456.789	5				
E11	65432.123	5	48861.586	7			
S20	38137559.506	335849.135	9				
>	2006 03 24 13 11 12.0000000	2	2				
	*** FROM NOW ON KINEMATIC DATA! ***					COMMENT	
	TWO COMMENT LINES FOLLOW DIRECTLY THE EVENT RECORD					COMMENT	
>	2006 3 24 13 11 12.0000000	0	4	-0.123456789876			
G06	21110991.756	16119.980	7	12560.510	4	21110991.441	25.543
G09	23588424.398	-215050.557	6	-167571.734	6	23588424.570	41.824
G12	20869878.790	-113803.187	8	-88677.926	6	20869878.938	36.961
G16	20621643.727	73797.462	7	57505.177	2	20621644.276	15.368
>		3	4				
A 9081						MARKER NAME	
9081.1.34						MARKER NUMBER	
.	.9050	.0000		.0000		ANTENNA: DELTA H/E/N	
	--> THIS IS THE START OF A NEW SITE <--					COMMENT	
>	2006 03 24 13 12 6.0000000	0	4	-0.123456987654			
G06	21112589.384	24515.877	6	19102.763	4	21112589.187	25.478
G09	23578228.338	-268624.234	7	-209317.284	6	23578228.398	41.725
G12	20625218.088	92581.207	7	72141.846	5	20625218.795	35.143
G16	20864539.693	-141858.836	8	-110539.435	2	20864539.943	16.345
>	2006 03 24 13 13 1.2345678	5	0				
>		4	2				
	AN EVENT FLAG 5 WITH A SIGNIFICANT EPOCH					COMMENT	
	AND AN EVENT FLAG 4 TO ESCAPE FOR THE TWO COMMENT LINES					COMMENT	
>	2006 03 24 13 14 12.0000000	0	4	-0.123456012345			
G06	21124965.133	0.30213		-0.62614		21124965.275	27.528
G09	23507272.372	-212616.150	7	-165674.789	7	23507272.421	42.124
G12	20828010.354	-333820.093	6	-260119.395	6	20828010.129	37.002
G16	20650944.902	227775.130	7	177487.651	3	20650944.363	18.040
>		4	1				
	*** LOST LOCK ON G 06					COMMENT	
.							
.							
.							
>		4	1			COMMENT	
END OF FILE							
----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8							

The receiver clock offset in the epoch record has been placed such that it could be preceded by an identifier to make it system-dependent in a later format revision, if necessary. The receiver clock offset is optional and is given in units of seconds.

Table A5 : GNSS Observation Data File – Example #2

TABLE A5 GNSS OBSERVATION DATA FILE - EXAMPLE #2												
4.02		OBSERVATION DATA	M		RINEX VERSION / TYPE							
RINEXSOFTWARE V1	User			20210702 000126 UTC	PGM / RUN BY / DATE							
REDU00BEL					MARKER NAME							
13102M001					MARKER NUMBER							
AUTOMATIC	ESA/ESOC				OBSERVER / AGENCY							
4503038	GNSS_RECEIVER	5.4.0			REC # / TYPE / VERS							
5644	GEOANTENNA	NONE			ANT # / TYPE							
4091423.7190	368380.6530	4863179.9940			APPROX POSITION XYZ							
0.1150	0.0000	0.0000			ANTENNA: DELTA H/E/N							
G 22 C1C L1C D1C S1C C1W S1W C2W L2W D2W S2W C2L L2L D2L	S2L C5Q L5Q D5Q S5Q C1L L1L D1L S1L				SYS / # / OBS TYPES							
E 20 C1C L1C D1C S1C C6C L6C D6C S6C C5Q L5Q D5Q S5Q C7Q	L7Q D7Q S7Q C8Q L8Q D8Q S8Q				SYS / # / OBS TYPES							
S 8 C1C L1C D1C S1C C5I L5I D5I S5I					SYS / # / OBS TYPES							
R 20 C1C L1C D1C S1C C1P L1P D1P S1P C2P L2P D2P S2P C2C	L2C D2C S2C C3Q L3Q D3Q S3Q				SYS / # / OBS TYPES							
C 24 C1P L1P D1P S1P C5P L5P D5P S5P C2I L2I D2I S2I C7I	L7I D7I S7I C6I L6I D6I S6I C7D L7D D7D S7D				SYS / # / OBS TYPES							
I 4 C5A L5A D5A S5A	30.000				SYS / # / OBS TYPES							
					INTERVAL							
2021 7 1 0 0	0 0.0000000	GPS			TIME OF FIRST OBS							
2021 7 1 23 59	30.0000000	GPS			TIME OF LAST OBS							
133					# OF SATELLITES							
DBHZ					SIGNAL STRENGTH UNIT							
24 R01 1 R02 -4 R03 5 R04 6 R05 1 R06 -4 R07 5 R08 6	GLONASS SLOT / FRQ #											
R09 -2 R10 -7 R11 0 R12 -1 R13 -2 R14 -7 R15 0 R16 -1	GLONASS SLOT / FRQ #											
R17 4 R18 -3 R19 3 R20 2 R21 4 R22 -3 R23 3 R24 2	GLONASS SLOT / FRQ #											
					END OF HEADER							
> 2021 07 01 00 00 0.0000000 0 42												
C05												
→40308490.226 5 209896917.35805		10.104 5			34.250		40308489.226 6					
→162305626.46606	7.618 6		40.500		40308491.534 6		170558460.27806					
→8.101 6 38.000												
C07												
→40159332.888 5 209120231.34705		-749.184 5			31.000		40159329.424 7					
→161705024.13707	-578.916 7		42.000		40159329.948 6		169927318.33206					
→-608.432 6 41.250												
C10												
→38657500.889 6 201299802.28006		-213.194 6			40.500		38657500.797 7					
→155657788.03207	-164.830 7		45.500		38657500.159 7		163572598.58707					
→-173.232 7 43.000												
[...]												
E02 26254562.136 6 137968706.53306		-2449.736 6			40.500		26254562.526 7					
→111987610.52607	-1988.494 7		44.500		26254562.708 7		103028609.46407					
→-1829.371 7 46.250		26254560.506 7		105716299.84207			-1877.171 7					
→46.000 26254561.518 8 104372462.72608		-1853.269 8			49.000							
E07 23635638.708 8 124206162.80708		-871.617 8			48.750		23635637.971 8					
→100816721.15408	-707.498 8		52.500		23635640.586 8		92751411.05508					
→-650.899 8 53.000		23635639.032 8		95171010.23608			-667.883 8					
→53.750 23635639.494 9 93961204.71809		-659.388 9			56.500							
E08 24972516.642 6 131231506.27606		-2679.842 6			40.000		24972519.075 7					
→106519133.68107	-2175.224 7		43.250		24972516.933 7		97997606.95207					
→-2001.200 7 43.500		24972515.374 7		100554056.30907			-2053.459 7					
→44.250 24972516.248 7 99275831.20407		-2027.334 7			46.750							
[...]												

G14	21030170.112	8	110514320.19008	642.342	8	48.250	21030169.835	6
→41.250	21030168.238	6	86115066.21306	500.526	6	41.250		
→21030168.748	8	86115068.21708	500.505	8	49.000	21030171.716	9	
→82526956.44709		479.678	9	54.000	21030170.080	8	110514301.19908	
→642.295	8		48.250					
G15	21142785.686	8	111106130.51808	2210.595	8	49.250	21142785.360	7
→42.250	21142783.280	7	86576198.32207	1722.539	7	42.250		
→21142783.830	7	86576199.32607	1722.505	7	45.500			
G18	24315176.881	4		-1296.168	4	26.750		
→24315171.412	3		-1007.045	3	21.000	24315179.308	5	
→95417985.50605		-967.978	5	33.250	24315177.474	4		-
→1296.538	4		26.500					
[...]								
I02	37579958.788	6	147471902.39806	207.789	6	41.250		
I06	38895003.676	6	152632382.60606	-8.242	6	39.000		
R04	24104058.479	5	129076151.77705	-4263.115	5	32.500	24104057.540	5
→129076153.74305		-4262.717	5	32.000	24104064.842	5	100392603.45705	
→-3315.798	5	31.750	24104063.510	5	100392591.36005		-3315.375	5
→32.000								
R05	20012862.544	8	106980270.92208	-2486.308	8	52.500	20012862.822	8
→106980260.92808		-2486.286	8	53.000	20012866.969	8	83206909.39508	
→-1933.770	8	49.750	20012866.589	8	83206896.39008		-1933.786	8
49.250								
R06	19816526.726	7	105744797.08507	2182.678	7	44.250	19816526.502	7
→105744790.10007		2182.521	7	43.500				
R09	24411449.113	6	130355805.45406	4217.981	6	36.000	24411450.687	6
→130355790.41406		4218.252	6	36.500	24411457.447	5	101387862.28405	
→3280.773	5	35.750	24411458.534	6	101387898.24806		3280.926	6
→37.250	24411444.199	5	97878261.11305		3167.148	5	34.500	
[...]								
S23	38851570.438	7	204166366.73207	4.096	7	42.250	38851545.524	6
→152461811.71106		3.160	6	37.500				
S25	38896540.414	5	204402846.86405	-273.406	5	35.250		
S26	40715470.533	5	213961234.62705	74.939	5	30.750		
S27	39936243.694	5	209866371.26905	-1.504	5	31.250	39936216.245	5
→156718290.21505		-1.331	5	33.000				
S36	38379035.028	7	201683190.91007	1.906	7	43.250	38379007.297	6
→150607468.03806		1.723	6	39.000				
S48	8153661.082	6	42847492.65406	66.518	6	37.750		
----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8								

Long observation lines per satellite are wrapped to fit the table width, each new line starts with a PRN and continues (indicated by →).

Table A6 : GNSS Observation Data File – Example #3

TABLE A6 GNSS OBSERVATION DATA FILE - EXAMPLE #3													
4.02	OBSERVATION DATA	M:	MIXED	RINEX VERSION / TYPE									
SW V3.08		20140513	072944 UTC	PGM / RUN BY / DATE									
SNR is mapped to RINEX snr flag value [1-9]				COMMENT									
LX:	< 12dBHz -> 1; 12-17dBHz -> 2; 18-23dBHz -> 3			COMMENT									
	24-29dBHz -> 4; 30-35dBHz -> 5; 36-41dBHz -> 6			COMMENT									
	42-47dBHz -> 7; 48-53dBHz -> 8; >= 54dBHz -> 9			COMMENT									
Tokyo				MARKER NAME									
TOKI				MARKER NUMBER									
USER	Organization			OBSERVER / AGENCY									
1870023	RECEIVER NAME	3.08	/ 6.401	REC # / TYPE / VERS									
	ANTENNA	NONE		ANT # / TYPE									
-3956196.8609	3349495.1794	3703988.8347		APPROX POSITION XYZ									
0.0000	0.0000	0.0000		ANTENNA: DELTA H/E/N									
G 16 C1C L1C D1C S1C C2S L2S D2S S2S C2W L2W D2W S2W C5Q	L5Q D5Q S5Q			SYS / # / OBS TYPES									
R 12 C1C L1C D1C S1C C2P L2P D2P S2P C2C L2C D2C S2C				SYS / # / OBS TYPES									
E 16 C1C L1C D1C S1C C5Q L5Q D5Q S5Q C7Q L7Q D7Q S7Q C8Q	L8Q D8Q S8Q			SYS / # / OBS TYPES									
C 8 C2I L2I D2I S2I C7I L7I D7I S7I				SYS / # / OBS TYPES									
J 12 C1C L1C D1C S1C C2S L2S D2S S2S C5Q L5Q D5Q S5Q				SYS / # / OBS TYPES									
S 4 C1C L1C D1C S1C				SYS / # / OBS TYPES									
DBHZ				SIGNAL STRENGTH UNIT									
	1.000			INTERVAL									
2014 05 13 07 30	0.0000000	GPS		TIME OF FIRST OBS									
2014 05 13 07 34	59.0000000	GPS		TIME OF LAST OBS									
0				RCV CLOCK OFFS APPL									
24 R01 1 R02 -4 R03 5 R04 6 R05 1 R06 -4 R07 5 R08 6 GLONASS SLOT / FRQ #	R09 -2 R10 -7 R11 0 R12 -1 R13 -2 R14 -7 R15 0 R16 -1 GLONASS SLOT / FRQ #												
R17 4 R18 -3 R19 3 R20 2 R21 4 R22 -3 R23 3 R24 2 GLONASS SLOT / FRQ #	C1C 0.000 C1P 0.000 C2C 0.000 C2P 0.000 GLONASS COD/PHS/BIS												
16 1694 7				LEAP SECONDS									
> 2014 05 13 07 30 0.0000000 0 25				END OF HEADER									

8.3 GNSS Navigation Message Files

8.3.1 Navigation File Header

Table A7 : GNSS Navigation Message File – Header Section Description

TABLE A7 GNSS NAVIGATION MESSAGE FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
RINEX VERSION / TYPE	<ul style="list-style-type: none"> – Format version: 4.02 – File type ('N' for Navigation Data) – Satellite System: G: GPS R: GLONASS E: Galileo J: QZSS C: Beidou I: NavIC S: SBAS M: Mixed 	F9.2,11X A1,19X A1,19X
PGM / RUN BY / DATE	<ul style="list-style-type: none"> – Name of program creating current file – Name of agency creating current file – Date and time of file creation (section 5.2.2) Format: yyyyymmdd hhmmss zone zone: 3-4 char. code for time zone. 'UTC' recommended! 'LCL' if local time with unknown time code 	A20 A20 A20
*REC # / TYPE / VERS	<ul style="list-style-type: none"> – Receiver number, type, and version (Version: e.g. Internal Software Version) <p>Notes:</p> <ol style="list-style-type: none"> 1. Station navigation files are to include this receiver line, as in the RINEX Observation files. 2. Merged navigation files <u>from multiple stations</u> are not to include this header line. 	3A20
*COMMENT	Free text comment line(s)	A60
*MERGED FILE	<ul style="list-style-type: none"> – Number of files merged (BNK) <p>Note: This merged file comment line should be included in merged navigation files. (see section 6.11)</p>	I9 51X
*DOI	<ul style="list-style-type: none"> – Digital Object Identifier (DOI) for data citation i.e. <a href="https://doi.org/<DOI-number>">https://doi.org/<DOI-number> 	A60

TABLE A7 GNSS NAVIGATION MESSAGE FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
*LICENSE OF USE	<ul style="list-style-type: none"> – Line(s) with the data license of use. Name of the license plus link to the specific version of the license. Using standard data license as from https://creativecommons.org/licenses/ – i.e. : CC BY 04 , https://creativecommons.org/licenses/by/4.0/ 	A60
*STATION INFORMATION	<ul style="list-style-type: none"> – Line(s) with the link(s) to persistent URL with the station metadata (site log, GeodesyML, etc) 	A60
LEAP SECONDS	<ul style="list-style-type: none"> – Current Number of leap seconds since 6 Jan 1980. – Future or past leap seconds Δt_{LSF}, i.e. future leap second if the week and day number are in the future. (BNK) – Respective week number WN_LSF (continuous number) (BNK), weeks since 6-Jan-1980. – Respective day number (1-7) (BNK). – System time identifier: only GPS is valid identifier. Blank defaults to GPS, see Notes section below. <p><i>Notes:</i></p> <ol style="list-style-type: none"> 1. GPS, GAL, QZS and IRN system times are aligned and equivalent with respect to leap seconds (Leap seconds since 6-Jan-1980). See the ICD reference; IS-GPS-200M, section 20.3.3.5.2.4. 2. When generating the leap second record from BDS navigation data the week count and day number must be adapted to GPS/GAL/QZS/IRN leap second conventions. 	I6 I6 I6 I6 A3
END OF HEADER		

Records marked with * are optional

BNK- Blank if Not Known/Not Defined

Table A8 : GNSS Navigation Message File Header – Examples

TABLE A8 GNSS NAVIGATION MESSAGE FILE HEADER - EXAMPLES							
4.02	NAVIGATION DATA	M	RINEX VERSION / TYPE				
BCEmerge	congo	20210706 004604 UTC	PGM / RUN BY / DATE				
78			MERGED FILE				
Merged GPS/GLO/GAL/BDS/QZS/SBAS/NavIC navigation file			COMMENT				
based on CONGO and IGS tracking data			COMMENT				
18 18 1929 7			LEAP SECONDS				
			END OF HEADER				
4.02	N: GNSS NAV DATA	M: MIXED	RINEX VERSION / TYPE				
genericSW	User	20210205 000517 UTC	PGM / RUN BY / DATE				
4503037	GNSS REC.	5.4.0	REC # / TYPE / VERS				
18			LEAP SECONDS				
			END OF HEADER				

8.3.2 GPS LNAV Navigation Message

Table A9 : GPS LNAV Navigation Message Record Description

TABLE A9 GPS LNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (G), sat number (PRN) - Navigation Message Type – LNAV - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (G), sat number (PRN) Toc - Time of Clock (GPS): - year (4 digits) - month, day, hour, minute, second - SV clock bias (seconds) - SV clock drift (sec/sec) - SV clock drift rate (sec/sec2) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - IODE Issue of Data, Ephemeris - C_rs (meters) - Delta n (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - T_oe Time of Ephemeris (sec of GPS wk 2*) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Codes on L2 channel (bits 1-2 w3 sf 1) - GPS Week # (to go with T_oe) Continuous number, not mod(1024)! - L2 P data flag (bit 1 w 4 sf 1) 	4X,4E19.12
BROADCAST ORBIT - 6	<ul style="list-style-type: none"> - SV accuracy (meters) See GPS ICD Section 20.3.3.3.1.3 use specified equations to define nominal values, N = 0-6: use $2^{(1+N/2)}$ (round to one decimal place i.e. 2.8, 5.7 and 11.3) , N= 7-15:use $2^{(N-2)}$, 8192 specifies use at own risk 	4X,4E19.12

TABLE A9 GPS LNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
	<ul style="list-style-type: none"> - SV health (bits 17-22 w 3 sf 1) - TGD (seconds) - IODC Issue of Data, Clock 	
BROADCAST ORBIT - 7	<ul style="list-style-type: none"> - t_tm : Transmission time of message (sec of GPS week, see section 6.11) 3*) - Fit Interval in hours; bit 17 w 10 sf 2 + IODC & Table 20-XII of GPS ICD. (BNK) 	4X,2E19.12

BNK- Blank if Not Known/Not Defined

*) see section 6.8.

2*) As per IS-200-GPS version J and up, Sect. 20.3.4.4, t_oe shall be equal to t_oc for the same LNAV data set. For backwards compatibility, independent t_oe and t_oc values are retained in the RINEX LNAV record.

3*) Adjust the *Transmission time of message* by ± 604800 to refer to the reported week in **BROADCAST ORBIT 5**, if necessary. Set value to **.99999999999E+09** if not known. Legacy navigation records without transmit time are permitted for compatibility, but strongly deprecated.

8.3.3 GPS CNAV Navigation Message

Table A10 : GPS CNAV Navigation Message Record Description

TABLE A10 GPS CNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (G), sat number (PRN) - Navigation Message Type – CNAV - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (G), sat number (PRN) Toc - Time of Clock (GPS) : - year (4 digits) - month, day, hour, minute, second - SV clock bias; a_f0 (seconds) - SV clock drift; a_f1 (sec/sec) - SV clock drift rate; a_f2 (sec/sec2) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12 *), 2*)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - A DOT (meters/sec) - C_rs (meters) - Delta n0 (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A0) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - t_op (seconds) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Delta n0 dot (radians/sec^2) - URAI_NED0 - URAI_NED1 	4X,4E19.12
BROADCAST ORBIT - 6	<ul style="list-style-type: none"> - URAI_ED - SV health (bits 52(MSB)-54(LSB) of msg 10, providing L1,L2,L5 Health) - TGD (seconds) - URAI_NED2 	4X,4E19.12
BROADCAST ORBIT - 7	<ul style="list-style-type: none"> - ISC_L1CA (seconds) - ISC_L2C (seconds) - ISC_L5I5 (seconds) 	4X,4E19.12

TABLE A10 GPS CNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
BROADCAST ORBIT - 8	<ul style="list-style-type: none"> - ISC_L5Q5 (seconds) - t_tm : Transmission time of message (sec of GPS week, see section 6.11) 3*) - wn_op : GPS continuous week number with the ambiguity resolved - Integer flags encoded as decimal value (optional; blank if not provided) <ul style="list-style-type: none"> Bit 0: Integrity Status Flag Bit 1: L2C Phasing Flag Bit 2: Alert Flag 4*) 	4X,3E19.12

*) see section 6.8.

2*) As per IS-GPS-200 30.3.4.4 and 20.3.4.4 first sentence, Toe must be equal to Toc. Therefore, only Toc is provided.

3*) Adjust the Transmission time of message by ±604800 to refer to the week in the “SV / EPOCH / SV CLK” line, if necessary.

4*) Integrity Status Flag: Bit 272 of msg type 10, L2C Phasing Flag: Bit 273 of msg type 10, Alert Flag: bit 38 of every msg (IS-GPS-200N)

8.3.4 GPS CNAV-2 Navigation Message

Table A11 : GPS CNAV-2 Navigation Message Record Description

TABLE A11 GPS CNAV-2 NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (G), sat number (PRN) - Navigation Message Type – CNV2 - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (G), sat number (PRN) Toc - Time of Clock (GPS): - year (4 digits) - month, day, hour, minute, second - SV clock bias; a_f0 (seconds) - SV clock drift; a_f1 (sec/sec) - SV clock drift rate; a_f2 (sec/sec2) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12 *), 2*)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - A_DOT (meters/sec) - C_rs (meters) - Delta n0 (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A0) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - t_op (seconds) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Delta n0 dot (radians/sec^2) - URAI_NED0 - URAI_NED1 	4X,4E19.12
BROADCAST ORBIT - 6	<ul style="list-style-type: none"> - URAI_ED - SV health (L1C health, bit 33 of sf 2) - TGD (seconds) - URAI_NED2 	4X,4E19.12
BROADCAST ORBIT - 7	<ul style="list-style-type: none"> - ISC_L1CA (seconds) - ISC_L2C (seconds) - ISC_L5I5 (seconds) - ISC_L5Q5 (seconds) 	4X,4E19.12

TABLE A11
GPS CNAV-2 NAVIGATION MESSAGE RECORD DESCRIPTION

*) see section 6.8.

2*) As per IS-GPS-800, paragraph 3.5.3.7.1, users shall use t_{oe} , to replace t_{oc} in the user algorithms for SV clock correction data. Therefore, only a single reference epoch $t_{oe} = t_{oc}$ is provided.

3*) Adjust the Transmission time of message by ± 604800 to refer to the week in the “SV / EPOCH / SV CLK” line, if necessary.

4*) Integrity Status Flag: Bit 566 of subframe 2 (IS-GPS-800J)

Table A12 : GPS Navigation Messages - Example

TABLE A12											
GPS NAVIGATION MESSAGES - EXAMPLE											
> EPH G04 LNAV	1 0 0 0 0 0 0 0 0 0 0 0										
G04	2019	03	14	04	00	00	1.330170780420e-04	7.275957614183e-12	0.000000000000e+00	9.800000000000e+01	-1.718750000000e+00
							-1.881271600723e-07	3.355251392350e-04	8.245930075645e-06	5.153800453186e+03	3.600000000000e+05
							-1.676380634308e-08	5.171400020311e-01	1.490116119385e-08	9.601921900531e-01	2.187187500000e+02
							-1.736906885738e+00	-8.044977962767e-09	-2.932264997750e-10	1.000000000000e+00	2.044000000000e+03
							4.000000000000e+00	8.660000000000e+02	3.553500000000e+05	4.000000000000e+00	0.000000000000e+00
> EPH G04 CNAV	1 0 0 0 0 0 0 0 0 0 0 0										
G04	2019	03	14	03	30	00	1.330042141490e-04	7.226219622680e-12	0.000000000000e+00	2.001762390137e-03	6.914062500000e-01
							1.024454832077e-08	3.348654136062e-04	8.376315236092e-06	5.153800325291e+03	2.412000000000e+05
							-4.656612873077e-09	5.171544951605e-01	2.328306436539e-08	9.601927657114e-01	2.174140625000e+02
							-1.737767543851e+00	-8.034028170143e-09	-2.950122884460e-10	1.312310522376e-14	-2.000000000000e+00
							0.000000000000e+00	7.000000000000e+00	-8.789356797934e-09	5.000000000000e+00	-5.820766091347e-10
							-6.606569513679e-09	-1.178705133498e-08	-1.178705133498e-08	3.558540000000e+05	2.044000000000e+03
> EPH G04 CNV2	1 0 0 0 0 0 0 0 0 0 0 0										
G04	2019	03	14	03	30	00	1.330042141490e-04	7.226219622680e-12	0.000000000000e+00	2.001762390137e-03	6.914062500000e-01
							1.024454832077e-08	3.348654136062e-04	8.376315236092e-06	5.153800325291e+03	2.412000000000e+05
							-4.656612873077e-09	5.171544951605e-01	2.328306436539e-08	9.601927657114e-01	2.174140625000e+02
							-1.737767543851e+00	-8.034028170143e-09	-2.950122884460e-10	1.312310522376e-14	-2.000000000000e+00
							0.000000000000e+00	1.000000000000e+00	-8.789356797934e-09	5.000000000000e+00	-3.492459654808e-10
							3.550860000000e+05	2.044000000000e+03			

---	-	-	1	0	--	-	-	-	2	0	--	-	-	3	0	--	-	-	4	0	--	-	-	5	0	--	-	-	6	0	--	-	-	7	0	--	-	-	8	-
-----	---	---	---	---	----	---	---	---	---	---	----	---	---	---	---	----	---	---	---	---	----	---	---	---	---	----	---	---	---	---	----	---	---	---	---	----	---	---	---	---

8.3.5 GALILEO INAV/FNAV Navigation Message

Table A13 : GALILEO INAV/FNAV Navigation Message Record Description

TABLE A13 GALILEO INAV/FNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (E), sat number (PRN) - Navigation Message Type – INAV or FNAV - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (E), satellite number Toc - Time of Clock GAL: - year (4 digits) - month, day, hour, minute, second - SV clock bias; af0 (seconds) - SV clock drift; af1 (sec/sec) - SV clock drift rate; af2 (sec/sec2) (see <i>Br.Orbit-5</i>, data source, bits 8+9) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - IODnav Issue of Data of the nav batch - C_rs (meters) - Delta n (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - Toe Time of Ephemeris (sec of GAL week) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12

TABLE A13 GALILEO INAV/FNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Data sources (binary number) <ul style="list-style-type: none"> Bit 0 set: I/NAV E1-B Bit 1 set: F/NAV E5a-I Bit 2 set: I/NAV E5b-I Bits 0 and 2: Both can be set if the INAV navigation messages were merged, however, bits cannot all be set, as the INAV and FNAV messages contain different information. Bit 3 reserved for Galileo internal use Bit 4 reserved for Galileo internal use Bit 8 set: af0-af2, Toc, SISA are for E5a,E1 Bit 9 set: af0-af2, Toc, SISA are for E5b,E1 Bits 8-9 : exclusive (only one bit can be set) - GAL Week # (to go with TOE) 	4X,3E19.12 4*) 5*)
BROADCAST ORBIT - 6	<ul style="list-style-type: none"> - SISA Signal in space accuracy (meters) No Accuracy Prediction Available (NAPA) / unknown: -1.0 - SV health (See Galileo ICD Section 5.1.9.3) <ul style="list-style-type: none"> Bit 0: E1B DVS Bits 1-2: E1B HS Bit 3: E5a DVS Bits 4-5: E5a HS Bit 6: E5b DVS Bits 7-8: E5b HS - BGD E5a/E1 (seconds) - BGD E5b/E1 (seconds) 	4X,4E19.12 4*)
BROADCAST ORBIT - 7	<ul style="list-style-type: none"> - t_tm : Transmission time of message (sec of GAL week, see section 6.11) 	4X,1E19.12 2*)

*) see section 6.8.

2*) Adjust the *Transmission time of message* by + or -604800 to refer to the reported week in **BROADCAST ORBIT - 5**, if necessary. Set value to **.99999999999E+09** if not known. Legacy navigation records without transmit time are permitted for compatibility, but strongly deprecated.

4*) For Navigation data fields stored bitwise see section 6.10.

5*) The GAL week number is a continuous number, aligned to (and hence identical to) the continuous GPS week number used in the RINEX navigation message files. The broadcast 12-bit Galileo System Time (GST) week has a roll-over after 4095. It started at zero at the first GPS roll-over (continuous GPS week 1024). Hence GAL week = GST week + 1024 + n*4096 (n: number of GST roll-overs).

6*) For Navigation data fields stored bitwise see section 6.10. If bit 0 or bit 2 of Data sources (**BROADCAST ORBIT - 5**) is set then the SV health parameter; 'E1B DVS' & 'E1B HS', 'E5b DVS' & 'E5b HS' and both 'BGDs' are valid. If bit 1 of Data sources is set then 'E5a DVS' & 'E5a HS' and BGD E5a/E1 are valid. Non-valid parameters are set to 0 and to be ignored.

Table A14 : GALILEO Navigation Messages - Examples

TABLE A14 GALILEO NAVIGATION MESSAGES - EXAMPLES									
----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8									
> EPH E12 INAV									
E12 2020 09 15 00 40 00 5.605182959698e-03-1.881517164293e-11 0.000000000000e+00 3.600000000000e+01 1.090625000000e+02 2.811188525857e-09-2.481435854929e+00 5.209818482399e-06 1.468013506383e-04 1.532956957817e-06 5.440609727859e+03 1.752000000000e+05-1.676380634308e-08 8.103706855689e-01 7.450580596924e-09 9.891660140720e-01 3.219375000000e+02 5.171049929386e-01-5.815956543649e-09 2.982267080537e-10 5.170000000000e+02 2.123000000000e+03 3.120000000000e+00 0.000000000000e+00-1.303851604462e-08-1.280568540096e-08 1.764340000000e+05									
> EPH E11 FNAV									
E11 2020 09 15 23 30 00 5.537368822843e-03 2.744400262600e-10 0.000000000000e+00 4.500000000000e+01 1.730312500000e+02 2.871548182937e-09-1.103934352668e-01 8.083879947662e-06 2.968260087073e-04 3.607943654060e-06 5.440606000900e+03 2.574000000000e+05-5.774199962616e-08 8.098963343817e-01-1.005828380585e-07 9.891873024559e-01 2.774062500000e+02 1.248848716430e+00-5.818456647788e-09 5.564517498775e-10 2.580000000000e+02 2.123000000000e+03 3.120000000000e+00 0.000000000000e+00-1.583248376846e-08 0.000000000000e+00 2.581000000000e+05									
----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8									

8.3.6 GLONASS FDMA Navigation Message

Table A15 : GLONASS FDMA Navigation Message Record Description

TABLE A15 GLONASS FDMA NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (R), sat number (slot number) - Navigation Message Type – FDMA - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (R), satellite number (slot number in sat. constellation) Toc - Time of Clock (UTC): <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - SV clock bias (sec) (-TauN) - SV relative frequency bias (+GammaN) - Message frame time (tk+(nd*86400)) in seconds of the UTC week 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - Satellite position X (km) - velocity X dot (km/sec) - X acceleration (km/sec2) - health (0=healthy, 1=unhealthy) (MSB of 3-bit Bn) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - Satellite position Y (km) - velocity Y dot (km/sec) - Y acceleration (km/sec2) - frequency number (-7...+13) (-7...+6 ICD 5.1) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - Satellite position Z (km) - velocity Z dot (km/sec) - Z acceleration (km/sec2) - Age of oper. information (days) (E) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - Status Flags 9-bit binary number (BNK if Unknown); M ; bit 7-8, GLO type indicator (00=GLO, 01=GLO-M/K) P4 ; bit 6, <u>GLO-M/K only</u>, 1=data updated, 0=data not updated P3 ; bit 5, num of satellites in current frame almanac (0 = 4 sats, 1 = 5 sats) P2 ; bit 4, indicate even (0) or odd (1) 	4X,4E19.12 2*)

TABLE A15 GLONASS FDMA NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
	of time interval P1 ; bit 2-3, update and validity interval (00 = 0 min, 01 = 30 min, 10=45 min, 11=60 min) P ; bit 0-1, <u>GLO-M/K only</u> , time offset parameters τ_c , τ_{GPS} source (00 =ground, 01 = τ_c ground, τ_{GPS} on-board, 10 = τ_c on-board, τ_{GPS} ground, 11 = on-board) - L1/L2 group delay difference $\Delta\tau$.(in seconds) 3*) - URAI ; <u>GLO-M/K only</u> – raw accuracy index F_T . 4*) - Health Flags 3-bit binary number (BNK if Unknown): 5*) $I_{(3)}$; bit 2, <u>GLO-M/K only</u> , health bit of string 3 Ac ; bit 1, 1 = almanac health reported in ephemerides record, 0 = not reported C ; bit 0, almanac health bit (1 = healthy, 0 = not healthy) <i>GLO-M/K exclusive flags and values only to be valid when flag M set to "01"</i>	

BNK- Blank if Not Known/Not Defined

*) see section 6.8.

2*) For Navigation data fields stored bitwise see section 6.10.

3*) **.99999999999E+09** if Unknown

4*) **1.50000000000E+01** if Unknown

5*) bit 0 (**C**) is to be ignored if bit 1 (**Ac**) is zero

8.3.7 GLONASS L1OC CDMA Navigation Message

Table A16 : GLONASS L1OC CDMA Navigation Message Record Description

TABLE A16 GLONASS L1OC CDMA NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (R), sat number (slot number) - Navigation Message Type – L1OC - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (R), satellite number (slot number in sat. constellation) Toc - Time of Clock (UTC): <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - SV clock bias (-TauN) (sec) - SV clock drift (+GammaN) (s/s) - SV clock drift rate (Beta) (s/s2) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - Satellite position X (km) - velocity X dot (km/sec) - X acceleration (km/sec2) - Signal Health (0=healthy, 1=unhealthy) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - Satellite position Y (km) - velocity Y dot (km/sec) - Y acceleration (km/sec2) - Data validity (0=valid, 1=invalid) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - Satellite position Z (km) - velocity Z dot (km/sec) - Z acceleration (km/sec2) - TGD_L2OCp (sec) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - Satellite Type (M) - Source flags (RE, RT) *) - AODE (E_E). (days) - AODC (E_T) (days) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - Attitude flag (P₂) *2) - T_{in} (sec of day, UTC(SU)) - Tau1 (sec) - Tau2 (sec) 	4X,4E19.12
BROADCAST ORBIT - 6	<ul style="list-style-type: none"> - Yaw angle (ψ_{in}) (rad) - Sign flag (sn) - Angular rate (ω_{in}) (rad/s) - Angular accel (dω/dt) (rad/s²) 	4X,4E19.12
BROADCAST ORBIT - 7	- Max Angular rate (ω_{max}) (rad/s)	4X,4E19.12

TABLE A16 GLONASS L1OC CDMA NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
	<ul style="list-style-type: none"> - X PC coord ($\Delta x_{pc,L1}$) (m) - Y PC coord ($\Delta y_{pc,L1}$) (m) - Z PC coord ($\Delta z_{pc,L1}$) (m). 3*) 	
BROADCAST ORBIT - 8	<ul style="list-style-type: none"> - URAI_orb (F_E) - URAI_clk (F_T) - Spare - t_tm : Transmission time of message . 	4X,4E19.12

BNK- Blank if Not Known/Not Defined

*) Decimal value representation of bits 102-105 of L1OCd string type 10: Bits 0-1: R_T and Bits 2-3: R_E

2*) 0=nominal yaw steering, 1=rate-limited yaw manoeuvre

3*) X,Y,Z PC coord refer to GLONASS manufacturer coordinate system.

8.3.8 GLONASS L3OC CDMA Navigation Message

Table A17 : GLONASS L3OC CDMA Navigation Message Record Description

TABLE A17 GLONASS L3OC CDMA NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (R), sat number (slot number) - Navigation Message Type – L3OC - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (R), satellite number (slot number in sat. constellation) - Toc - Time of Clock (UTC): - year (4 digits) - month, day, hour, minute, second - SV clock bias (-TauN) (sec) - SV clock drift (+GammaN) (s/s) - SV clock drift rate (Beta) (s/s²) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - Satellite position X (km) - velocity X dot (km/sec) - X acceleration (km/sec²) - Signal Health (0=healthy, 1=unhealthy) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - Satellite position Y (km) - velocity Y dot (km/sec) - Y acceleration (km/sec²) 	4X,4E19.12

TABLE A17 GLONASS L3OC CDMA NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
BROADCAST ORBIT - 3	- Data validity (0=valid, 1=invalid) - Satellite position Z (km) - velocity Z dot (km/sec) - Z acceleration (km/sec2) - ISC_L3OCp (sec)	4X,4E19.12
BROADCAST ORBIT - 4	- Satellite Type (M) - Source flags (R_E , R_T) *) - AODE (E_E). (days) - AODC (E_T) (days)	4X,4E19.12
BROADCAST ORBIT - 5	- Attitude flag (P_2) 2*) - T_{in} (sec of day, UTC(SU)) - Tau1 (sec) - Tau2 (sec)	4X,4E19.12
BROADCAST ORBIT - 6	- Yaw angle (ψ_{in}) (rad) - Sign flag (sn) - Angular rate (ω_{in}) (rad/s) - Angular accel ($d\omega/dt$) (rad/s ²)	4X,4E19.12
BROADCAST ORBIT - 7	- Max Angular rate (ω_{max}) (rad/s) - X PC coord ($\Delta x_{pc,L3}$) (m) - Y PC coord ($\Delta y_{pc,L3}$) (m) - Z PC coord ($\Delta z_{pc,L3}$) (m). 3*)	4X,4E19.12
BROADCAST ORBIT - 8	- URAI_orb (F_E) - URAI_clk (F_T) - Spare - t_tm : Transmission time of message .	4X,4E19.12

BNK- Blank if Not Known/Not Defined

*) Decimal value representation of bits 109-112 of L3OCd string type 10: Bits 0-1: R_T and Bits 2-3: R_E

2*) 0=nominal yaw steering, 1=rate-limited yaw manoeuvre

3*) X,Y,Z PC coord refer to GLONASS manufacturer coordinate system.

Table A18 : GLONASS Navigation Message Files - Example

TABLE A18 GLONASS NAVIGATION MESSAGE FILE - EXAMPLES	
> EPH R01 FDMA	----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8
R01 2020 09 15 23 45 00	6.761029362679e-05 0.000000000000e+00 2.587200000000e+05
	-1.390448925781e+04 2.552483558655e+00-4.656612873077e-09 0.000000000000e+00
	-3.950272460938e+03-1.328901290894e+00 1.862645149231e-09 1.000000000000e+00
	2.101021875000e+04 1.440399169922e+00-1.862645149231e-09 0.000000000000e+00
	1.470000000000e+02 8.381903171539e-09 2.000000000000e+00 0.000000000000e+00
> EPH R04 FDMA	
R04 2020 09 15 22 45 00	5.470402538776e-05 9.094947017729e-13 2.541000000000e+05
	1.043976806641e+04-2.930776596069e+00 3.725290298462e-09 0.000000000000e+00
	8.152179687500e+03 5.874986648560e-01 0.000000000000e+00 6.000000000000e+00

```

-2.177643408203e+04-1.184345245361e+00 9.313225746155e-10 0.000000000000e+00
 2.430000000000e+02-2.793967723846e-09 4.000000000000e+00 3.000000000000e+00
> EPH R26 L1OC
R26 2024 02 03 00 15 00-1.605716170161e-05 1.652011860642e-12-2.081668171172e-17
 1.812154053020e+04-2.071979139000e+00 5.729816621169e-10 1.000000000000e+00
-2.325615360260e+03 1.285475494340e+00-1.047737896442e-09 1.000000000000e+00
 1.781341854668e+04 2.280306640081e+00-9.458744898438e-10 0.000000000000e+00
 2.000000000000e+00 1.000000000000e+01 7.500000000000e-01 7.500000000000e-01
 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00
 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00
 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00
 1.500000000000e+01 5.000000000000e+00 5.184000000000e+05
> EPH R26 L3OC
R26 2024 02 03 00 15 00-1.605716170161e-05 1.652011860642e-12-2.081668171172e-17
 1.812154053020e+04-2.071979139000e+00 5.729816621169e-10 1.000000000000e+00
-2.325615360260e+03 1.285475494340e+00-1.047737896442e-09 1.000000000000e+00
 1.781341854668e+04 2.280306640081e+00-9.458744898438e-10 0.000000000000e+00
 2.000000000000e+00 1.000000000000e+01 7.500000000000e-01 7.500000000000e-01
 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00
 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00
 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00
 1.500000000000e+01 5.000000000000e+00 5.184000000000e+05
----|---1|0---|---2|0---|---3|0---|---4|0---|---5|0---|---6|0---|---7|0---|---8|

```

8.3.9 QZSS LNAV Navigation Message

Table A19 : QZSS LNAV Navigation Message Record Description

TABLE A19 QZSS LNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (J), sat number (see Table 6) - Navigation Message Type – LNAV - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (J), sat number (see Table 6) - Toc - Time of Clock: <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minutes, seconds - SV clock bias (seconds) - SV clock drift (sec/sec) - SV clock drift rate (sec/sec2) 	A1,I2, 1X,I4, 5(1X,I2), 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - IODE Issue of Data, Ephemeris - C_rs (meters) - Delta n (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - Toe Time of Ephemeris (sec of GPS week) - C_ic (radians) - OMEGA (radians) - CIS (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Reserved & Ephemerides Status flags 2*) - GPS Week # (to go with TOE) Continuous number, not mod(1024)! - L2P data flag set to 1 since QZSS does not track L2P 	4X,4E19.12

TABLE A19 QZSS LNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
BROADCAST ORBIT – 6	<ul style="list-style-type: none"> - SV accuracy (meters) (IS -QZSS-PNT, Section 5.4.3.1) use specified equations to define nominal values, N = 0-6: use $2^{(1+N/2)}$ (round to one decimal place i.e. 2.8, 5.7 and 11.3) , N= 7-15:use $2^{(N-2)}$, 8192 specifies use at own risk - SV health (bits 17-22 w 3 sf 1) (see IS-QZSS-PNT 5.4.1) - TGD (seconds) The QZSS ICD specifies a do not use bit pattern "10000000" this condition is represented by a blank field. - IODC Issue of Data, Clock 	4X,4E19.12
BROADCAST ORBIT – 7	<ul style="list-style-type: none"> - t_tm : Transmission time of message (sec of GPS week, see section 6.11) 3*) - Fit interval flag (0 / 1) (see IS-QZSS-PNT, 4.1.2.4(3) 0 – two hours), 1 – more than 2 hours (BNK). 	4X,2E19.12

BNK- Blank if Not Known/Not Defined

*) see section 6.8.

2*) bits 71 & 72 of subframe 1., previously known as “Code on L2” in IS-QZSS-PNT-004 and earlier versions

3*) Adjust the *Transmission time of message* by ± 604800 to refer to the reported week in **BROADCAST ORBIT 5**, if necessary. Set value to **.99999999999E+09** if not known. Legacy navigation records without transmit time are permitted for compatibility, but strongly deprecated.

8.3.10 QZSS CNAV Navigation Message

Table A20 : QZSS CNAV Navigation Message Record Description

TABLE A20 QZSS CNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (J), sat number (see Table 6) - Navigation Message Type – CNAV - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (J), sat number (see Table 6) Toc - Time of Clock (QZSS): <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - SV clock bias; a_f0 (seconds) - SV clock drift; a_f1 (sec/sec) - SV clock drift rate; a_f2 (sec/sec2) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - A DOT (meters/sec) - C_rs (meters) - Delta n0 (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A0) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - t_op (seconds) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Delta n0 dot (radians/sec^2) - URAI_NED0 - URAI_NED1 	4X,4E19.12
BROADCAST ORBIT - 6	<ul style="list-style-type: none"> - URAI_ED - SV health (bits 52(MSB)-54(LSB) of msg 10, providing L1,L2,L5 Health) - TGD (seconds) 2*) - URAI_NED2 	4X,4E19.12

TABLE A20 QZSS CNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
BROADCAST ORBIT - 7	<ul style="list-style-type: none"> - ISC_L1CA (seconds) - ISC_L2C (seconds) - ISC_L5I5 (seconds) - ISC_L5Q5 (seconds) 	4X,4E19.12 2*)
BROADCAST ORBIT - 8	<ul style="list-style-type: none"> - t_tm : Transmission time of message (sec of GPS week, see section 6.11) 3*) - wn_op : GPS continuous week number with the ambiguity resolved. - Integer flags encoded as decimal value (optional; blank if not provided) <ul style="list-style-type: none"> Bit 0: Integrity Status Flag Bit 1: Ephemeris Status Flag Bit 2: Alert Flag 	4X,3E19.12 4*)

*) see section 6.8.

2*) The QZSS ICD specifies a **do not use** bit pattern "1000000000000" for CNAV TGD and ISC values. This condition is represented by a blank field in the RINEX record.

3*) Adjust the Transmission time of message by ± 604800 to refer to the week in the "SV / EPOCH / SV CLK" line, if necessary.

4*) Integrity Status Flag: Bit 272 of msg type 10, Ephemeris Status Flag: Bit 273 of msg type 10, Alert Flag: Bit 38 of every msg (IS-QZSS-PNT-005)

8.3.11 QZSS CNAV-2 Navigation Message

Table A21 : QZSS CNAV-2 Navigation Message Record Description

TABLE A21 QZSS CNAV-2 NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (J), sat number (see Table 6) - Navigation Message Type – CNV2 - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (J), sat number (PRN, see Table 6) Toc - Time of Clock (GPS): - year (4 digits) - month, day, hour, minute, second - SV clock bias; a_f0 (seconds) - SV clock drift; a_f1 (sec/sec) - SV clock drift rate; a_f2 (sec/sec2) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - A DOT (meters/sec) - C_rs (meters) - Delta n0 (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A0) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - t_op (seconds) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Delta n0 dot (radians/sec^2) - URAI_NED0 - URAI_NED1 	4X,4E19.12
BROADCAST ORBIT - 6	<ul style="list-style-type: none"> - URAI_ED - SV health (L1C health) - TGD (seconds) - URAI_NED2 	4X,4E19.12 2*)
BROADCAST ORBIT - 7	- ISC_L1CA (seconds)	4X,4E19.12

TABLE A21
QZSS CNAV-2 NAVIGATION MESSAGE RECORD DESCRIPTION

NAV. RECORD	DESCRIPTION	FORMAT
	- ISC_L2C (seconds) - ISC_L5I5 (seconds) - ISC_L5Q5 (seconds)	2*)
BROADCAST ORBIT - 8	- ISC_L1Cd (seconds) - ISC_L1Cp (seconds)	4X,2E19.12 2*)
BROADCAST ORBIT - 9	- t_tm : Transmission time of message (sec of GPS week, see section 6.11) 3*) - wn_op : GPS continuous week number with the ambiguity resolved. - Integer flags encoded as decimal value (optional; blank if not provided) Bit 0: Integrity Status Flag Bit 1: Ephemeris Status Flag	4X,3E19.12 4*)

*) see section 6.8.

2*) The QZSS ICD specifies a **do not use** bit pattern "1000000000000" for CNAV TGD and ISC values. This condition is represented by a blank field in the RINEX record.

3*) Adjust the Transmission time of message by ± 604800 to refer to the week in the "SV / EPOCH / SV CLK" line, if necessary.

4*) Integrity Status Flag: Bit 566 of subframe 2, Ephemeris Status Flag: Bit 575 of subframe 2 (IS-QZSS-PNT-005)

Table A22 : QZSS Navigation Message File - Examples

TABLE A22	
QZSS NAVIGATION MESSAGE FILE - EXAMPLE	
----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8	
> EPH J01 LNAV	
J01 2021 01 23 02 00 00-3.374307416379e-04-1.364242052659e-12 0.0000000000000e+00	
1.330000000000e+02 9.578125000000e+01 1.388272112820e-09-2.070362217868e+00	
2.535060048103e-06 7.562357175630e-02 5.446374416351e-06 6.493648595810e+03	
5.256000000000e+05-1.164153218269e-06 4.173927833877e-01-3.390014171600e-06	
7.304595403547e-01-1.565625000000e+01-1.559470529133e+00-9.082521180606e-10	
1.361128125021e-09 2.000000000000e+00 2.141000000000e+03 1.000000000000e+00	
2.800000000000e+00 0.000000000000e+00-5.587935447693e-09 9.010000000000e+02	
5.220060000000e+05 0.000000000000e+00	
> EPH J01 CNAV	
J01 2021 01 23 02 00 00-3.374309453648e-04-1.364242052659e-12 0.0000000000000e+00	
-2.224636077881e-02 9.925390625000e+01 2.809759894921e-09-2.070460582285e+00	
2.630054950714e-06 7.561515661655e-02 6.853602826595e-06 6.493646338351e+03	
5.256000000000e+05 2.942979335785e-07 4.174090012975e-01 2.151355147362e-07	
7.304471282263e-01-5.480078125000e+01-1.559404111189e+00-2.726307082255e-09	
5.480585431239e-10 5.534811322777e-14-3.000000000000e+00 0.000000000000e+00	
-8.000000000000e+00 0.000000000000e+00-5.675246939063e-09 0.000000000000e+00	
0.000000000000e+00 3.667082637548e-09 2.561137080193e-09 1.949956640601e-09	
5.220060000000e+05 2.141000000000e+03	
> EPH J01 CNV2	
J01 2021 01 23 02 00 00-3.374309453648e-04-1.364242052659e-12 0.0000000000000e+00	
-2.224636077881e-02 9.925390625000e+01 2.809759894921e-09-2.070460582285e+00	
2.630054950714e-06 7.561515661655e-02 6.853602826595e-06 6.493646338351e+03	
5.256000000000e+05 2.942979335785e-07 4.174090012975e-01 2.151355147362e-07	
7.304471282263e-01-5.480078125000e+01-1.559404111189e+00-2.726307082255e-09	
5.480585431239e-10 5.534811322777e-14-3.000000000000e+00 0.000000000000e+00	
-8.000000000000e+00 0.000000000000e+00-5.675246939063e-09 0.000000000000e+00	

0.000000000000e+00	3.667082637548e-09	2.561137080193e-09	1.949956640601e-09
4.365574568510e-10	2.910383045673e-10		
5.220180000000e+05	2.141000000000e+03		

----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8
--

8.3.12 BEIDOU D1/D2 Navigation Message

Table A23 : BEIDOU D1/D2 Navigation Message Record Description

TABLE A23 BEIDOU D1/D2 NAVIGATION MESSAGES RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (C), sat number (PRN) - Navigation Message Type – D1 or D2 - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) <p>Note: D1 is the BDS-2/3 MEO/IGSO legacy navigation message, D2 is the BDS-2/3 GEO legacy navigation message.</p>	A1 1X,A3 1X,A3 1X,A2 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (C), sat number (PRN) - Toc - Time of Clock (BDT): - year (4 digits) - month, day, hour, minute, second - SV clock bias (seconds) - SV clock drift (sec/sec) - SV clock drift rate (sec/sec²) 	A1,I2.2, 1X,I4 5,1X,I2.2, 3E19.12 *)
BROADCAST ORBIT – 1	<ul style="list-style-type: none"> - AODE Age of Data, Ephemeris (as specified in BeiDou B1I and B3I ICDs Table Section 5.2.4.11 Table 5-8) and field range is: 0-31. - C_rs (meters) - Delta n (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT – 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT – 3	<ul style="list-style-type: none"> - ToE Time of Ephemeris (sec of BDT week) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT – 4	<ul style="list-style-type: none"> - i0 (radians) 	4X,4E19.12

TABLE A23 BEIDOU D1/D2 NAVIGATION MESSAGES RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
	<ul style="list-style-type: none"> - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Spare (see Section 6.4) - BDT Week # - Spare (see Section 6.4) 	4X,E19.12, A19, E19.12, A19
BROADCAST ORBIT - 6	<ul style="list-style-type: none"> - SV accuracy (meters See: BDS ICD Section 5.2.4.: to define nominal values, N = 0-6: use $2^{(1+N/2)}$ (round to one decimal place i.e. 2.8, 5.7 and 11.3) , N= 7-15:use $2^{(N-2)}$, 8192 specifies use at own risk) - SatH1 - TGD1 B1/B3 (seconds) - TGD2 B2/B3 (seconds) 	4X,4E19.12
BROADCAST ORBIT - 7	<ul style="list-style-type: none"> - t_tm: Transmission time of message (sec of BDT week, see section 6.11) 2*) - AODC Age of Data Clock (as specified in BeiDou B1I and B3I ICDs Table Section 5.2.4.8, Table 5-6) and field range is: 0-31. 	4X,2E19.12

*) see section 6.8.

2*) Adjust the Transmission time of message by + or -604800 to refer to the reported week in BROADCAST ORBIT -5, if necessary. Set value to **.99999999999E+09** if not known. Legacy navigation records without transmit time are permitted for compatibility, but strongly deprecated.

8.3.13 BEIDOU CNAV-1 Navigation Message

Table A24 : BEIDOU CNAV-1 Navigation Message Record Description

TABLE A24 BEIDOU CNAV-1 NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (C), sat number (PRN) - Navigation Message Type – CNV1 - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) <p><i>Note:</i> CNV1 is the navigation message on the Beidou-3 B1C signal.</p>	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (C), sat number (PRN) Toc - Time of Clock (BDT): <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - SV clock bias; a_f0 (sec) - SV clock drift; a_f1 (sec/sec) - SV clock drift rate; a_f2 (sec/sec²) 	A1,I2.2, 1X,I4 5(1X,I2.2), 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - A DOT (meters/sec) - C_rs (meters) - Delta n0 (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A0) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - ToE Time of Ephemeris (sec of BDT week) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Delta n0 dot (radians/sec²) - SatType: 0=reserved, 1=GEO, 2=IGSO, 3=MEO - t_op (seconds) 	4X,4E19.12
BROADCAST ORBIT - 6	<ul style="list-style-type: none"> - SISAI_oe 	4X,4E19.12

TABLE A24 BEIDOU CNAV-1 NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
	<ul style="list-style-type: none"> - SISAI_ocb - SISAI_oc1 - SISAI_oc2 	
BROADCAST ORBIT – 7	<ul style="list-style-type: none"> - ISC_B1Cd (seconds) - Spare(x1) (see Section 6.4) - TGD_B1Cp (seconds) - TGD_B2ap (seconds) 	4X,E19.12, A19, 2E19.12
BROADCAST ORBIT – 8	<ul style="list-style-type: none"> - SISMAI - Health: 2-bits health word from sf 3 (0=healthy, 1=unhealthy or in test, others reserved) - B1C Integrity flags: 3-bits word from sf 3 (bit 2(MSB)=DIF, bit 1 = SIF, bit 0(LSB) = AIF) - IODC 	4X,4E19.12
BROADCAST ORBIT – 9	<ul style="list-style-type: none"> - t_tm: Transmission time of message (sec of BDT week, see section 6.11) 2*) - Spare(x2) (see Section 6.4) - IODE <p>Note: for a matched pair of orbit and clock data, the IODE are the same as the 8 LSBs of IODC</p>	4X,E19.12, 2A19, E19.12

*) see section 6.8.

2*) Adjust the Transmission time of message by ± 604800 to refer to the week in the “SV / EPOCH / SV CLK” line, if necessary.

8.3.14 BEIDOU CNAV-2 Navigation Message

Table A25 : BEIDOU CNAV-2 Navigation Message Record Description

TABLE A25 BEIDOU CNAV-2 NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (C), sat number (PRN) - Navigation Message Type – CNV2 - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) <p><i>Note:</i> CNV2 is the navigation message on the Beidou-3 B2a signal.</p>	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (C), sat number (PRN) Toc - Time of Clock (BDT): - year (4 digits) - month, day, hour, minute, second - SV clock bias; a_f0 (sec) - SV clock drift; a_f1 (sec/sec) - SV clock drift rate; a_f2 (sec/sec²) 	A1,I2.2, 1X,I4 5,1X,I2.2, 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - A DOT (meters/sec) - C_rs (meters) - Delta n0 (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A0) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - ToE Time of Ephemeris (sec of BDT week) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Delta n0 dot (radians/sec²) - SatType: 0=reserved, 1=GEO, 2=IGSO, 3=MEO - t_op (seconds) 	4X,4E19.12

TABLE A25 BEIDOU CNAV-2 NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
BROADCAST ORBIT – 6	- SISAI_oe - SISAI_ocb - SISAI_oc1 - SISAI_oc2	4X,4E19.12
BROADCAST ORBIT – 7	- Spare(x1) (see Section 6.4) - ISC_B2ad (seconds) - TGD_B1Cp (seconds) - TGD_B2ap (seconds)	4X,A19, 3E19.12
BROADCAST ORBIT – 8	- SISMAI - Health: 2-bits health word from msg 11, 30-34, 40 (0=healthy, 1=unhealthy or in test, others reserved) - B2a+B1C Integrity flags: 6-bits word with integrity bits in msg 10-11, 30-34 or 40 (bit 5(MSB) = DIF(B2a), bit 4 = SIF(B2a), bit 3 = AIF(B2a), bit 2 = DIF(B1C), bit1 = SIF (B1C), bit 0(LSB)=AIF(B1C)) - IODC	4X,4E19.12
BROADCAST ORBIT – 9	- t_tm: Transmission time of message (sec of BDT week, see section 6.11) - Spare(x2) (see Section 6.4) - IODE <i>Note:</i> for a matched pair of orbit and clock data, the IODE are the same as the 8 LSBs of IODC	4X,E19.12, 2*) 2A19, E19.12

*) see section 6.8.

2*) Adjust the Transmission time of message by ± 604800 to refer to the week in the “SV / EPOCH / SV CLK” line, if necessary.

8.3.15 BEIDOU CNAV-3 Navigation Message

Table A26 : BEIDOU CNAV-3 Navigation Message Record Description

TABLE A26 BEIDOU CNAV-3 NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (C), sat number (PRN) - Navigation Message Type – CNV3 - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) <p>Note: CNV3 is the navigation message of the Beidou-3 MEO and IGSO satellites on B2b signal.</p>	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (C), sat number (PRN) Toc - Time of Clock (BDT): - year (4 digits) - month, day, hour, minute, second - SV clock bias; a_f0 (seconds) - SV clock drift; a_f1 (sec/sec) - SV clock drift rate; a_f2 (sec/sec²) 	A1,I2.2, 1X,I4 5,1X,I2.2, 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - A DOT (meters/sec) - C_rs (meters) - Delta n0 (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A0) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - ToE Time of Ephemeris (sec of BDT week) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Delta n0 dot (radians/sec²) - SatType: 0=reserved, 1=GEO, 2=IGSO, 3=MEO - t_op (seconds) 	4X,4E19.12

TABLE A26 BEIDOU CNAV-3 NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
BROADCAST ORBIT – 6	- SISAI_oe - SISAI_ocb - SISAI_oc1 - SISAI_oc2	4X,4E19.12
BROADCAST ORBIT – 7	- SISMAI - Health: 2-bits health word from msg 30 (0=healthy, 1=unhealthy or in test, others reserved) - B2b Integrity flags: 3-bits word from msg 10 (bit 2(MSB)=DIF, bit 1 = SIF, bit 0(LSB) = AIF) - TGD_B2bI (seconds)	4X,4E19.12
BROADCAST ORBIT – 8	- t_tm : Transmission time of message (sec of BDT week, see section 6.11)	4X,E19.12 2*)

*) see section 6.8.

2*) Adjust the Transmission time of message by ± 604800 to refer to the week in the “SV / EPOCH / SV CLK” line, if necessary.

Table A27 : BEIDOU Navigation Messages - Examples

TABLE A27 BeiDou NAVIGATION MESSAGES - EXAMPLE									
> EPH C05 D2									
C05	2021	07	05	22	00	00-5.836377386004e-05	1.694644424788e-11	0.000000000000e+00	0.000000000000e+00
						-1.817941665649e-06	7.691901409999e-04	1.800991594791e-05	6.493525815964e+03
						1.656000000000e+05	2.072192728519e-07	2.624951167227e+00	-1.122243702412e-07
						1.151558582809e-01	-5.497031250000e+02-4.954214719500e-01	-8.100337411567e-10	6.564559154524e-10
						2.000000000000e+00	0.000000000000e+00	0.000000000000e+00	-9.500000000000e-09
						1.656000000000e+05	0.000000000000e+00		
> EPH C20 D1									
C20	2021	07	05	02	00	00-8.545715827495e-04	1.170086250113e-11	0.000000000000e+00	1.000000000000e+00
						-6.286427378654e-08	8.448450826108e-04	6.472226232290e-06	5.282618293762e+03
						9.360000000000e+04	2.328306436539e-09-2.772255179876e+00	-1.164153218269e-08	9.665781566257e-01
						4.171602335410e-10	2.337656250000e+02-6.218441883865e-01	-6.809926517917e-09	2.000000000000e+00
						9.360000000000e+04	0.000000000000e+00	2.300000000000e-08	8.090000000000e+02
						1.000000000000e+00			
> EPH C20 CNV1									
C20	2021	07	05	22	00	00-8.537324611098e-04	1.167599350538e-11	0.000000000000e+00	-3.525733947754e-03
						1.960937500000e+00	3.931056601429e-09-2.980266083268e+00		8.434175979346e-04
						7.729977369308e-08	7.596798241138e-06	5.282624978926e+03	7.596798241138e-06
						1.656000000000e+05-4.190951585770e-08	-2.772741033988e+00-2.514570951462e-08		2.328306436539e-08-2.968590706587e-09
						9.666057809078e-01	2.101328125000e+02-6.122205141961e-01	-6.644205329250e-09	4.784127849557e-10
						4.784127849557e-10	2.655139894109e-14	3.000000000000e+00	1.656000000000e+05
						0.000000000000e+00	-4.000000000000e+00-1.000000000000e+00	-1.000000000000e+00	0.000000000000e+00
						-3.492459654808e-10	2.328306436539e-08-2.968590706587e-09		-1.000000000000e+00
						-1.000000000000e+00	0.000000000000e+00	0.000000000000e+00	1.800000000000e+01
						1.656000000000e+05			1.800000000000e+01
> EPH C20 CNV2									
C20	2021	07	05	23	00	00-8.536910172552e-04	1.159872198286e-11	0.000000000000e+00	-4.044532775879e-03
						1.300781250000e+00	3.943199964392e-09-2.492861436039e+00		8.432919275947e-04
						0.000000000000e+00	7.565133273602e-06	5.282623812254e+03	7.565133273602e-06
						1.692000000000e+05-4.656612873077e-08	-2.772764954893e+00-3.632158041000e-08		2.102968750000e+02-6.120578881764e-01
						9.666074588748e-01	2.102968750000e+02-6.120578881764e-01	-6.652598536003e-09	4.810914679621e-10
						4.810914679621e-10	2.790294798407e-14	3.000000000000e+00	1.692000000000e+05
						0.000000000000e+00	-5.000000000000e+00-1.000000000000e+00	-1.000000000000e+00	0.000000000000e+00
						-2.502929419279e-09	2.328306436539e-08-2.968590706587e-09		1.500000000000e+01
						1.500000000000e+01	0.000000000000e+00	0.000000000000e+00	1.900000000000e+01
						1.692000000000e+05			1.900000000000e+01
> EPH C20 CNV3									
C20	2021	07	05	00	00	00-8.546562166885e-04	1.154543127768e-11	0.000000000000e+00	-2.965450286865e-03
						-6.914062500000e-01	4.088206004475e-09-1.129589146916e+00		8.444703416899e-04
						-6.891787052155e-08	6.626360118389e-06	5.282619899994e+03	8.640000000000e+04
						8.640000000000e+04	3.725290298462e-08-2.772205880999e+00	0.000000000000e+00	9.665752168918e-01
						9.665752168918e-01	2.300390625000e+02-6.230324874839e-01	-6.829570193298e-09	2.300390625000e+02-6.230324874839e-01
						3.953736117551e-10	2.727077181880e-14	3.000000000000e+00	8.640000000000e+04
						0.000000000000e+00	-5.000000000000e+00-1.000000000000e+00	-1.000000000000e+00	0.000000000000e+00
						1.500000000000e+01	0.000000000000e+00	0.000000000000e+00	1.746229827404e-09
						8.640000000000e+04			

8.3.16 SBAS Navigation Message Record

Table A28 : SBAS Navigation Message Record Description

TABLE A28 SBAS NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (S), sat number (PRN-100) - Navigation Message Type – SBAS - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (S), sat number (PRN-100) Toc - Time of Clock (GPS): - year (4 digits) - month, day, hour, minute, second - SV clock bias; aGf0 (seconds) - SV relative frequency bias; aGf1 (sec/sec) - Transmission time of message in GPS seconds of the week, see section 6.11 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12, *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - Satellite position X (km) - velocity X dot (km/sec) - X acceleration (km/sec2) - Health: SBAS: See section 5.4.7 for: health, health availability and User Range Accuracy. 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - Satellite position Y (km) - velocity Y dot (km/sec) - Y acceleration (km/sec2) - Accuracy code (URA, meters) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - Satellite position Z (km) - velocity Z dot (km/sec) - Z acceleration (km/sec2) - IODN (Issue of Data Navigation, see reference RTCA DO-229, 8 first bits after Message Type of MT9) 	4X,4E19.12

*) see section 6.8.

Table A29 : SBAS Navigation Message - Example

TABLE A29 SBAS NAVIGATION MESSAGE - EXAMPLE							
----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8							
> EPH S28 SBAS							
S28 2020 09 15 23 56 48 5.075708031654e-08-2.091837814078e-11 2.589840000000e+05 5.159782400000e+03 7.125000000000e-04-2.500000000000e-08 0.000000000000e+00 4.185231736000e+04-2.462500000000e-04-3.750000000000e-08 4.096000000000e+03 -8.261200000000e+00-1.328000000000e-03 6.250000000000e-08 1.200000000000e+01							
> EPH S30 SBAS							
S30 2020 09 15 00 00 00 1.937150955200e-07 0.000000000000e+00 1.728330000000e+05 -3.228075088000e+04 1.990000000000e-03-1.375000000000e-07 1.000000000000e+00 2.711642576000e+04-1.374375000000e-03-1.000000000000e-07 3.276700000000e+04 -1.045603600000e+03-3.671600000000e-02 2.750000000000e-06 5.900000000000e+01							
> EPH S23 SBAS							
S23 2020 09 15 00 01 52 0.000000000000e+00 0.000000000000e+00 1.729280000000e+05 3.594460000000e+04 0.000000000000e+00 0.000000000000e+00 1.000000000000e+00 2.204414000000e+04 0.000000000000e+00 0.000000000000e+00 3.276700000000e+04 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00 5.800000000000e+01							
> EPH S23 SBAS							
S23 2020 09 15 00 04 16 0.000000000000e+00 0.000000000000e+00 1.730570000000e+05 3.594460000000e+04 0.000000000000e+00 0.000000000000e+00 1.000000000000e+00 2.204414000000e+04 0.000000000000e+00 0.000000000000e+00 3.276700000000e+04 0.000000000000e+00 0.000000000000e+00 0.000000000000e+00 5.900000000000e+01							
----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8							

8.3.17 NavIC LNAV Navigation Message

Table A30 : NavIC LNAV Navigation Message Record Description

TABLE A30 NavIC LNAV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (I), sat number (PRN) - Navigation Message Type – LNAV - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (I), sat number (PRN) Toc - Time of Clock (NavIC): - year (4 digits) - month, day, hour, minute, second - SV clock bias (seconds) - SV clock drift (sec/sec) - SV clock drift rate (sec/sec2) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - IODEC Issue of Data, Ephemeris and Clock - C_rs (meters) - Delta n (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - Toe Time of Ephemeris (sec of NavIC week) - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Spare (see Section 6.4) - IRN Week # (to go with TOE) Continuous number, not mod (1024), counted from 1980 (same as GPS). - Spare (see Section 6.4) 	4X,E19.12, A19, E19.12, A19

TABLE A30
NavIC LNAV NAVIGATION MESSAGE RECORD DESCRIPTION

*) see section 6.8.

2*) Adjust the *Transmission time of message* by + or -604800 to refer to the reported week in **BROADCAST ORBIT 5**, if necessary. Set value to **.99999999999E+09** if not known.

Legacy navigation records without transmit time are permitted for compatibility, but strongly deprecated.

8.3.18 NavIC L1NV Navigation Message

Table A31 : NavIC L1NV Navigation Message Record Description

TABLE A31 NavIC L1NV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EPH - Satellite system (I), sat number (PRN) - Navigation Message Type – L1NV - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A3 1X,A4 1X,A4
SV / EPOCH / SV CLK	<ul style="list-style-type: none"> - Satellite system (I), sat number (PRN) Toc - Time of Clock (NavIC): - year (4 digits) - month, day, hour, minute, second - SV clock bias (a_f0) (seconds) - SV clock drift (a_f1) (sec/sec) - SV clock drift rate (a_f2) (sec/sec2) 	A1,I2.2, 1X,I4, 5(1X,I2.2), 3E19.12 *)
BROADCAST ORBIT - 1	<ul style="list-style-type: none"> - A_DOT (meters/sec) - C_rs (meters) - Delta n0 (radians/sec) - M0 (radians) 	4X,4E19.12
BROADCAST ORBIT - 2	<ul style="list-style-type: none"> - C_uc (radians) - e Eccentricity - C_us (radians) - sqrt(A) (sqrt(m)) 	4X,4E19.12
BROADCAST ORBIT - 3	<ul style="list-style-type: none"> - IODEC Issue of Data, Ephemeris and Clock - C_ic (radians) - OMEGA0 (radians) - C_is (radians) 	4X,4E19.12
BROADCAST ORBIT - 4	<ul style="list-style-type: none"> - i0 (radians) - C_rc (meters) - omega (radians) - OMEGA DOT (radians/sec) 	4X,4E19.12
BROADCAST ORBIT - 5	<ul style="list-style-type: none"> - IDOT (radians/sec) - Delta n0 dot (radians/sce^2) - Spare (see Section 6.4) - RSF (Reference Signal Flag) 	2X,E19.12, A19, E19.12 2*)

TABLE A31 NavIC L1NV NAVIGATION MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
BROADCAST ORBIT - 6	- URAI - User Range Accuracy Index, See NavIC ICD Section 6.2.1.8 - L1 SPS Health, where 0 = All navigation data on L1-SPS signal OK, 1 = Some or all navigation data on L1SPS signal bad. - TGD L1P-L5 (RSF=0) (seconds) - TGD S-L5 (RSF=1) (seconds)	4X,4E19.12,
BROADCAST ORBIT - 7	- ISC_S(L1P) (RSF=0) (seconds) - ISC_L1D(L1P) (RSF=0) (seconds) - ISC_L1P(S) (RSF=1) (seconds) - ISC_L1D(S) (RSF=1) (seconds)	4X,4E19.12,
BROADCAST ORBIT - 8	- Transmission time of message 3*) (sec of NavIC week, see section 6.11)	4X,E19.12

*) see section 6.8.

2*) if RSF ==1, ISCLIP will be broadcasted; if RSF ==0, ISC_S (ISC_S) will be broadcasted, along with the TGD and ISC_{L1D}. Depending on the RSF value, only three out of six group delay parameters (Timing Group Delay and Inter-Signal Correction) will be populated. Unavailable values should be set to blanks.

3*) Adjust the *Transmission time of message* by + or -604800 to refer to the reported week in **BROADCAST ORBIT 5**, if necessary. Set value to **.999999999999E+09** if not known. Legacy navigation records without transmit time are permitted for compatibility, but strongly deprecated.

Table A32 : NavIC LNAV and L1NV Navigation Messages – Example

TABLE A32 NAVIC NAVIGATION MESSAGE - EXAMPLE	
---	---
> EPH I02 LNAV	
I02 2020 09 15 02 05 36 6.225099787116e-04 1.773514668457e-11 0.000000000000e+00	
1.690000000000e+02-5.79375000000e+02 4.834487090078e-09-4.281979621524e-01	
-1.904368400574e-05 2.015684265643e-03-3.430992364883e-06 6.493289550781e+03	
1.803360000000e+05 2.495944499969e-07-1.337499015334e+00 7.450580596924e-08	
5.022043764738e-01 1.946250000000e+02-2.970970345572e+00-4.461614415577e-09	
-9.578970431139e-10 2.123000000000e+03	
2.000000000000e+00 0.000000000000e+00-1.862645149231e-09	
1.804920000000e+05	
> EPH I02 LNAV	
I02 2020 09 15 02 20 48 6.225225515664e-04 1.500666257925e-11 0.000000000000e+00	
1.700000000000e+02-5.798125000000e+02 4.847344768509e-09-3.616804200470e-01	
-1.905485987663e-05 2.015971462242e-03-3.460794687271e-06 6.493290285110e+03	
1.812480000000e+05 2.346932888031e-07-1.337503058840e+00 8.568167686462e-08	
5.022034285029e-01 1.955625000000e+02-2.970975986584e+00-4.478757986819e-09	
-9.593256740507e-10 2.123000000000e+03	
2.000000000000e+00 0.000000000000e+00-1.862645149231e-09	
1.814040000000e+05	
> EPH I10 L1NV	
I10 2023 06 24 00 05 00 1.527369022369e-07 1.364242052659e-12 0.000000000000e+00	

0.000000000000e+00	-2.593125000000e+02	7.028864208979e-09	2.300305834983e+00
-8.691102266312e-06	4.531537415460e-04	-3.855675458908e-06	6.493495117188e+03
7.000000000000e+00	1.341104507446e-07	1.359342162629e-01	-7.078051567078e-08
8.594830530333e-02	1.214375000000e+02	-5.136403830694e-02	-5.858815471753e-09
-4.846630453041e-10	0.000000000000e+00		1.000000000000e+00
1.500000000000e+01	0.000000000000e+00		-3.608874976635e-09
		6.984919309616e-09	5.995389074087e-09
5.191380000000e+05			
----- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8			

8.4 STO, EOP and ION Navigation File Messages

8.4.1 System Time Offset (STO) Message

Table A33 : System Time Offset (STO) Message Record Description

TABLE A33 SYSTEM TIME OFFSET MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – STO - Satellite system (G, R, E, C, J, I, S) - Sat number (PRN) (or BNK) *) - Navigation Message Type – LNAV, FDMA, IFNV, D1D2, SBAS, CNVX, L1NV, LXOC 2*) - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A1 A2 1X,A4 1X,A4
EPOCH / SYSTEM CORR TYPE / SBAS ID / UTC ID	<p>t_ot – Reference epoch for time offset information:</p> <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - Time offset “2-char + 2-char” of system time codes; GP, GL, GA, BD, QZ, IR, SB, UT 3*) - SBAS ID for SBUT system time offset indicator; WAAS, EGNOS, MSAS, GAGAN, SDCM, BDSBAS, KASS, A-SBAS, SPAN (BNK if not SBUT) (see section 5.4.9) - UTC ID for UT times offsets – UTC (USNO), UTC (SU), UTC GAL, UTC (NTSC), UTC (NICT), UTC (NPLI), UTC IRN, UTC (OP), UTC (NIST).(see section 5.4.9, Table 27) 	4X,I4, 5(1X,I2.2), 1X,A18 (left justified) 1X,A18 (left justified) 1X,A18 (left justified)
STO MESSAGE LINE - 1	<ul style="list-style-type: none"> - t_tm - Transmission time of message 4*) (sec of GNSS system week, see sect. 6.11) - A0 (sec) - A1 (sec/sec) - A2 (sec/sec²) (zero if not available) 	4X,4E19.12

BNK- Blank if Not Known/Not Defined

*) To indicate the constellation providing the data (and optionally the specific satellite).

2*) Indicate the **STO** navigation message type in which the data was received (see section 5.4.1)3*) Indicate the 4-character Time offset correction type by relating two 2-letter system time codes such as **GP****UT**: GPS-UTC, **GL****GP**: GLO-GPS, etc (see section 5.4.9, see relevant system ICD for details)

4*) The transmission time of message is defined to hold the number of seconds since start of the reference epoch week, it may attain both positive and negative values and its magnitude may exceed the number of seconds per week (604800).

8.4.2 Earth Orientation Parameter (EOP) Message

Table A34 : Earth Orientation Parameter (EOP) Message Record Description

TABLE A34 EOP MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – EOP - Satellite system (G, R, C, J, I) - Sat number (PRN) (or BNK) *) - Navigation Message Type – LNAV, CNVX, LINV, LXOC 2*) - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A1 A2 1X,A4 1X,A4
EOP MESSAGE LINE - 0	t_EOP – Reference epoch of EOP data: <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - Xp (arc-sec) - dXp/dt (arc-sec/day) - dXp/dt² (arc-sec/day²) 3*)	4X,I4, 5(1X,I2.2), 3E19.12
EOP MESSAGE LINE - 1	<ul style="list-style-type: none"> - Spare (see Section 6.4) - Yp (arc-sec) - dYp/dt (arc-sec/day) - d²Yp/dt² (arc-sec/day²) 3*)	4X,A19, 3E19.12
EOP MESSAGE LINE - 2	<ul style="list-style-type: none"> - t_tm : Transmission time of message 4*) (sec of GNSS system week, see section 6.11) - ΔUT1 (sec) <i>Note:</i> depending on the constellation and the applicable ICD version, Delta UT1 may provide the UT1-UTC difference (always smaller than 1s by magnitude) or the UT1-GPST difference (always negative and larger than 1s by magnitude). - dΔUT1/dt (sec/day) - d²ΔUT1/dt² (sec/day²) 3*)	4X,4E19.12

*) To indicate the constellation providing the data (and optionally the specific satellite)

2*) Indicate the EOP navigation message type in which the data was received (see section 5.4.1)

3*) Unavailable EOP parameters should be set to zero

4*) The transmission time of message is defined to hold the number of seconds since start of the reference epoch week, it may attain both positive and negative values and its magnitude may exceed the number of seconds per week (604800).

8.4.3 Ionosphere (ION) Klobuchar Model Message

Table A35 : Ionosphere (ION) Klobuchar Model Message Record Description

TABLE A35 ION KLOBUCHAR MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – ION - Satellite system (G, C, J, I) - Sat number (PRN) (or BNK) - Navigation Message Type – LNAV, D1D2, CNVX - Navigation Message Subtype, Region code: <ul style="list-style-type: none"> - WIDE (QZSS wide area coefficients), - JAPN (QZSS Japan area coefficients). 	A1 1X,A3 1X,A1 A2 1X,A4 1X,A4
ION MESSAGE LINE - 0	t_tm – Transmit time of ionosphere data: <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - Alpha0 (sec) - Alpha1 (sec/semi-circle) - Alpha2 (sec/semi-circle²) 	4X,I4, 5(1X,I2.2), 3E19.12
ION MESSAGE LINE - 1	<ul style="list-style-type: none"> - Alpha3 (sec/semi-circle³) - Beta0 (sec) - Beta1 (sec/semi-circle) - Beta2 (sec/semi-circle²) 	4X,4E19.12
ION MESSAGE LINE - 2	<ul style="list-style-type: none"> - Beta3 (sec/semi-circle³) 	4X,E19.12

BNK- Blank if Not Known/Not Defined

*) To indicate the constellation providing the data (and optionally the specific satellite)

2*) Indicate the ION navigation message type in which the data was received (see section 5.4.1)

3*) The QZSS **ION CNVX** message type must have a subtype indicator (**WIDE** or **JAPN**), see Table 25, while for the other types the subtype shall be left blank.

8.4.4 Ionosphere (ION) NEQUICK-G Model Message

Table A36 : Ionosphere (ION) NEQUICK-G Model Message Record Description

TABLE A36 ION NEQUICK-G MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – ION - Satellite system (E) - Sat number (PRN) (or BNK) *) - Navigation Message Type – IFNV 2*) - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A1 A2 1X,A4 1X,A4
ION MESSAGE LINE - 0	t_tm – Transmit time of ionosphere data: <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - ai0 (sfu) - ai1 (sfu/deg) - ai2 (sfu/deg²) 	4X,I4, 5(1X,I2.2), 3E19.12 3*)
ION MESSAGE LINE - 1	<ul style="list-style-type: none"> - Disturbance flags: 5-bit field from FNAV page 1 or INAV word 5 (<ul style="list-style-type: none"> bit 4 (MSB) = flag for region 1, bit 3 = flag for region 2, bit 2 = flag for region 3, bit 1 = flag for region 4, bit 0 (LSB) = flag for region 5)) 	4X,E19.12

BNK- Blank if Not Known/Not Defined

*) To indicate the constellation providing the data (and optionally the specific satellite)

2*) Indicate the ION navigation message type in which the data was received (see section 5.4.1)

3*) The ‘sfu’ (solar flux unit) is not an SI unit but can be converted as 1 sfu = 10⁻²²W/(m²*Hz)
(Section 5.1.6, Galileo SiS ICD)

8.4.5 Ionosphere (ION) BDGIM Model Message

Table A37 : Ionosphere (ION) BDGIM Model Message Record Description

TABLE A37 ION BDGIM MODEL MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – ION - Satellite system (C) - Sat number (PRN) (or BNK) *) - Navigation Message Type – CNVX - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A1 A2 1X,A4 1X,A4
ION MESSAGE LINE - 0	t_tm – Transmit time of ionosphere data: <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - Alpha1 (TECu) - Alpha2 (TECu) - Alpha3 (TECu) 	4X,I4, 5(1X,I2.2), 3E19.12
ION MESSAGE LINE - 1	<ul style="list-style-type: none"> - Alpha4 (TECu) - Alpha5 (TECu) - Alpha6 (TECu) - Alpha7 (TECu) 	4X,4E19.12
ION MESSAGE LINE - 2	<ul style="list-style-type: none"> - Alpha8 (TECu) - Alpha9 (TECu) 	4X,2E19.12

BNK- Blank if Not Known/Not Defined

*) To indicate the constellation providing the data (and optionally the specific satellite)

8.4.6 Ionosphere (ION) NavIC L1NV Klobuchar Model Message

Table A38 : Ionosphere (ION) NavIC L1NV Klobuchar Model Message Record Description

TABLE A38 ION NAVIC KLOBUCHAR MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – ION - Satellite system (I) - Sat number (PRN) (or BNK) *) - Navigation Message Type – L1NV 2*) - Navigation Message Subtype – - KLOB 3*) 	A1 1X,A3 1X,A1 A2 1X,A4 1X,A4
ION MESSAGE LINE - 0	t_tm – Transmit time of ionosphere data: <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - IODK 	4X,I4, 5(1X,I2.2), E19.12
ION MESSAGE LINE - 1	<ul style="list-style-type: none"> - Alpha0 (sec) - Alpha1 (sec/semi-circle) - Alpha2 (sec/semi-circle²) - Alpha3 (sec/semi-circle³) 	4X,4E19.12
ION MESSAGE LINE - 2	<ul style="list-style-type: none"> - Beta0 (sec) - Beta1 (sec/semi-circle) - Beta2 (sec/semi-circle²) - Beta3 (sec/semi-circle³) 	4X,4E19.12
ION MESSAGE LINE - 3	<ul style="list-style-type: none"> - Longitude min (deg) - Longitude max (deg) - Latitude min (deg) - Latitude max (deg) 	4X,4E19.12

BNK- Blank if Not Known/Not Defined

*) To indicate the constellation providing the data (and optionally the specific satellite)

2*) Indicate the ION navigation message type in which the data was received (see section 5.4.1)

3*) The NavIC **ION L1NV** message type must have a subtype indicator (**KLOB** or **NEQN**), see Table 25.

8.4.7 Ionosphere (ION) NavIC L1NV NEQUICK-N Model Message

Table A39 : Ionosphere (ION) NavIC L1NV NeQuick-N Model Message Record Description

TABLE A39 ION NAVIC KLOBUCHAR MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – ION - Satellite system (I) - Sat number (PRN) (or BNK) *) - Navigation Message Type – L1NV 2*) - Navigation Message Subtype – NEQN 3*) 	A1 1X,A3 1X,A1 A2 1X,A4 1X,A4
ION MESSAGE LINE - 0	t_tm – Transmit time of ionosphere data: <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - IODN 	4X,I4, 5(1X,I2.2), E19.12
ION MESSAGE LINE - 1	<ul style="list-style-type: none"> - a0 (region 1) (sfu) - a1 (sfu/deg) - a2 (sfu/deg²) - IDF 	4X,4E19.12
ION MESSAGE LINE - 2	<ul style="list-style-type: none"> - Longitude min (deg) - Longitude max (deg) - MOVID min (deg) - MOVID max (deg) 	4X,4E19.12
ION MESSAGE LINE - 3	<ul style="list-style-type: none"> - a0 (region 2) (sfu) - a1 (sfu/deg) - a2 (sfu/deg²) - IDF 	4X,4E19.12
ION MESSAGE LINE - 4	<ul style="list-style-type: none"> - Longitude min (deg) - Longitude max (deg) - MOVID min (deg) - Latitude max (deg) 	4X,4E19.12
ION MESSAGE LINE - 5	<ul style="list-style-type: none"> - a0 (region 3) (sfu) - a1 (sfu/deg) - a2 (sfu/deg²) - IDF 	4X,4E19.12
ION MESSAGE LINE - 6	<ul style="list-style-type: none"> - Longitude min (deg) - Longitude max (deg) - MOVID min (deg) - Latitude max (deg) 	4X,4E19.12

BNK- Blank if Not Known/Not Defined

*) To indicate the constellation providing the data (and optionally the specific satellite)

2*) Indicate the ION navigation message type in which the data was received (see section 5.4.1)

3*) The NavIC **ION L1NV** message type must have a subtype indicator (**KLOB** or **NEQN**), see Table 25.

8.4.8 Ionosphere (ION) GLONASS CDMA Model Message

Table A40 : Ionosphere (ION) GLONASS CDMA Model Message Record Description

TABLE A40 ION GLONASS CDMS MESSAGE RECORD DESCRIPTION		
NAV. RECORD	DESCRIPTION	FORMAT
TYPE / SV / MSSG	<ul style="list-style-type: none"> - New Record identifier: > - Navigation Data Record Type – ION - Satellite system (R) - Sat number (PRN) (or BNK) *) - Navigation Message Type – LXOC 2*) - Navigation Message Subtype (BNK if not defined for the specific record message type – see Table 22 to Table 25) 	A1 1X,A3 1X,A1 A2 1X,A4 1X,A4
ION MESSAGE LINE - 0	t_tm – Transmit time of ionosphere data: <ul style="list-style-type: none"> - year (4 digits) - month, day, hour, minute, second - c_A - c_F10.7 - c_Ap 	4X,I4, 5(1X,I2.2), E19.12 E19.12 E19.12

BNK- Blank if Not Known/Not Defined

*) To indicate the constellation providing the data (and optionally the specific satellite)

2*) Indicate the ION navigation message type in which the data was received (see section 5.4.1)

8.4.9 STO, EOP, ION - Examples

Table A41 : STO, EOP, ION Messages - Examples

TABLE A41 STO, EOP, ION MESSAGES - EXAMPLES						
---- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8						
> STO E IFNV						
2020 09 15 00 00 00 GAUT					UTC GAL	
1.73500000000e+05-1.862645149231e-09	0.00000000000e+00	0.00000000000e+00				
> STO G24 CNVX						
2020 09 18 19 56 48 GPUT					UTC (USNO)	
2.53224000000e+05	9.895302355289e-10-1.154631945610e-14	0.00000000000e+00				
> STO E LEG						
2020 09 16 00 00 00 GAGP					UTC CIRN	
2.17300000000e+05	2.299202606082e-09	0.00000000000e+00	0.00000000000e+00			
> STO I02 LNAV						
2020 09 15 00 04 48 IRUT					UTC (NPLI)	
1.73172000000e+05-8.614733815193e-09-1.776356839400e-15	0.00000000000e+00	0.00000000000e+00				
> STO I02 LNAV						
2020 09 15 00 04 48 IRUT					UTC (NICT)	
1.73220000000e+05	2.619344741106e-10	3.996802888651e-15	0.00000000000e+00			
> STO J02 LNAV						
2020 09 18 02 52 48 QZUT					UTC (NICT)	
1.83714000000e+05-9.313225746155e-10	0.00000000000e+00	0.00000000000e+00				
> STO C46 CNVX						
2021 07 05 23 20 00 BDGL					UTC (NTSC)	
1.71486000000e+05-3.768946044147e-08-3.730349362741e-13-2.168404344971e-19	0.00000000000e+00	0.00000000000e+00				
> STO C46 CNVX						
2021 07 05 00 20 00 BDGP					UTC (NPLI)	
8.86500000000e+04-3.181048668921e-08	2.176037128265e-14	2.134523027081e-19	0.00000000000e+00			
> STO C46 CNVX						
2021 07 05 04 11 28 BDUT					UTC (NICT)	
1.03050000000e+05-3.696186468005e-09	0.00000000000e+00	0.00000000000e+00				
> STO I10 L1NV						
2023 06 24 23 00 00 IRGP					UTC (NICT)	
6.04080000000e+05-1.717125996947e-09-4.440892098501e-16	0.00000000000e+00	0.00000000000e+00				
> STO I10 L1NV						
2023 06 24 23 00 00 IRUT					UTC (NPLI)	
6.04080000000e+05	6.984919309616e-10-4.440892098501e-15	0.00000000000e+00	0.00000000000e+00			
> STO I10 L1NV						
2023 06 24 23 00 00 IRUT					UTC (NICT)	
6.04080000000e+05-4.074536263943e-09	3.996802888651e-15	0.00000000000e+00	0.00000000000e+00			
> STO R26 LXOC						
2024 02 03 00 15 00 GLGP					UTC (SU)	
5.18400000000e+05	5.504261935130e-08	0.00000000000e+00	0.00000000000e+00			
> STO R26 LXOC						
2024 02 03 00 15 00 GLUT					UTC (NICT)	
5.18400000000e+05-8.335337042809e-08-4.618527782441e-14	0.00000000000e+00	0.00000000000e+00				
---- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8						
> EOP G24 CNVX						
2020 09 18 19 56 48 2.070846557617e-01-2.679824829102e-04	0.00000000000e+00	0.00000000000e+00				
3.392457962036e-01-1.400947570801e-03	0.00000000000e+00	0.00000000000e+00				
2.53248000000e+05-1.759799122810e-01-7.975101470947e-05	0.00000000000e+00	0.00000000000e+00				
> EOP C20 CNVX						
2020 09 15 00 00 00 2.084112167358e-01-3.948211669922e-04	0.00000000000e+00	0.00000000000e+00				
3.408145904541e-01-1.317977905273e-03	0.00000000000e+00	0.00000000000e+00				
1.74990000000e+05-1.752023100853e-01	2.140104770660e-04	0.00000000000e+00				
> EOP J01 CNVX						
2020 09 15 01 00 00 2.082471847534e-01-6.551742553711e-04	0.00000000000e+00	0.00000000000e+00				
3.444433212280e-01-9.121894836426e-04	0.00000000000e+00	0.00000000000e+00				
1.72986000000e+05-1.754972934723e-01	5.635917186737e-04	0.00000000000e+00				
> EOP I10 L1NV						
2023 06 24 00 04 48 1.616811752319e-01 2.847671508789e-03	0.00000000000e+00	0.00000000000e+00				
5.110225677490e-01-3.657341003418e-04	0.00000000000e+00	0.00000000000e+00				

5.194260000000e+05	-3.845626115799e-02	3.758668899536e-04	0.000000000000e+00
> EOP R04 LXOC			
2024 02 02 21 00 00	6.079101562500e-02	-2.380371093750e-03	0.000000000000e+00
	2.203369140625e-01	1.281738281250e-03	0.000000000000e+00
5.183940000000e+05	3.387451171875e-03	-2.441406250000e-04	0.000000000000e+00
---- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8			
> ION G14 CNVX			
2021 07 05 23 30 42	7.450580596924e-09	2.235174179077e-08	-5.960464477539e-08
	-1.192092895508e-07	9.216000000000e+04	1.310720000000e+05
	-5.242880000000e+05		
> ION E13 IFNV			
2021 07 05 00 11 04	5.450000000000e+01	3.593750000000e-01	1.358032226562e-02
	0.000000000000e+00		
> ION E12 IFNV			
2021 07 05 23 41 40	5.450000000000e+01	3.593750000000e-01	1.358032226562e-02
	0.000000000000e+00		
> ION C03 D1D2			
2021 07 05 00 09 00	7.450580596924e-09	4.470348358154e-08	-4.172325134277e-07
	5.960464477539e-07	1.187840000000e+05	1.802240000000e+05
	5.242880000000e+05		
> ION I10 L1NV KLOB			
2023 06 24 00 07 30	1.000000000000e+00		
	5.867332220078e-08	2.533197402954e-07	-1.430511474609e-06
	1.495040000000e+05	-5.406720000000e+05	2.883584000000e+06
	5.000000000000e+01	1.100000000000e+02	8.323072000000e+06
		0.000000000000e+00	5.000000000000e+01
> ION I10 L1NV NEQN			
2023 06 24 00 17 24	0.000000000000e+00		
	1.982500000000e+02	0.000000000000e+00	0.000000000000e+00
	3.000000000000e+01	1.300000000000e+02	-3.000000000000e+01
	-3.08593750000e-01	-3.41796875000e-03	1.000000000000e+00
	3.000000000000e+01	1.300000000000e+02	-5.000000000000e+00
	1.982500000000e+02	0.000000000000e+00	3.000000000000e+01
	3.000000000000e+01	1.300000000000e+02	3.500000000000e+01
> ION R22 LXOC			
2024 02 03 00 01 09	1.000000000000e+00	1.410000000000e+02	5.000000000000e+00
---- ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8			

8.5 Meteorological Data File

Table A42 : Meteorological Data File – Header Section Description

TABLE A42 METEOROLOGICAL DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
RINEX VERSION / TYPE	- Format version: 4 . 02 - File type: M for Meteorological Data	F9.2,11X, A1,39X
PGM / RUN BY / DATE	- Name of program creating current file - Name of agency creating current file - Date and time of file creation (section 5.2.2) Format: yyyyymmdd hhmmss zone zone: 3-4 char. code for time zone. 'UTC' recommended 'LCL' if local time with unknown time code	A20, A20, A20
*COMMENT	- Comment line(s)	A60
MARKER NAME	- Station Name (preferably identical to MARKER NAME in the associated Observation File)	A60
*MARKER NUMBER	- Station Number (preferably identical to MARKER NUMBER in the associated Observation File)	A20
*DOI	- Digital Object Identifier (DOI) for data citation i.e. <a href="https://doi.org/<DOI-number>">https://doi.org/<DOI-number>	A60
*LICENSE OF USE	- Line(s) with the data license of use. Name of the license plus link to the specific version of the license. Using standard data license as from https://creativecommons.org/licenses/ - i.e. : CC BY 04 ; https://creativecommons.org/licenses/by/4.0/	A60
*STATION INFORMATION	- Line(s) with the link(s) to persistent URL with the station metadata (site log, GeodesyML, etc)	A60
# / TYPES OF OBSERV	- Number of different observation types stored in the file - Observation types; The following meteorological observation types are defined in RINEX: PR : Pressure (mbar) TD : Dry temperature (deg Celsius) HR : Relative humidity (percent) ZW : Wet zenith path delay (mm) (for WVR data) ZD : Dry component of zen.path delay (mm) ZT : Total zenith path delay (mm) WD : Wind azimuth (deg)	I6, 9(4X,A2)

TABLE A42 METEOROLOGICAL DATA FILE - HEADER SECTION DESCRIPTION		
HEADER LABEL (Columns 61-80)	DESCRIPTION	FORMAT
	<p>(from where the wind blows)</p> <p>WS : Wind speed (m/s)</p> <p>RI : "Rain increment" (1/10 mm)</p> <p>(Rain accumulation since last measure)</p> <p>HI : Hail indicator non-zero (Hail detected since last measurement)</p> <p>The sequence of the types in this record must correspond to the sequence of the measurements in the data records.</p> <ul style="list-style-type: none"> - If more than 9 observation types are being used, use continuation lines with format 	(6X,9(4X,A2))
SENSOR MOD/TYPE/ACC	<p>Description of the met sensor</p> <ul style="list-style-type: none"> - Model (manufacturer) - Type - Accuracy (same units as obs values) - Observation type <p>Record is repeated for each observation type found in # / TYPES OF OBSERV record</p>	A20, A20,6X, F7.1,4X, A2,1X
SENSOR POS XYZ/H	<ul style="list-style-type: none"> - Approximate position of the met sensor - Geocentric coordinates X, Y, Z (ITRF or WGS84) - Ellipsoidal height H - Observation type <p>Set X, Y, Z to zero or blank if unknown. Make sure H refers to ITRF or WGS-84. Record required for barometer, recommended for other sensors.</p>	3F14.4, 1F14.4, 1X,A2,1X
END OF HEADER	Last record in the header section.	60X

Records marked with * are optional

Table A43 : Meteorological Data File – Data Record Description

TABLE A43 METEOROLOGICAL DATA FILE - DATA RECORD DESCRIPTION		
OBS. RECORD	DESCRIPTION	FORMAT
EPOCH / MET	<p>Epoch in GPS time:</p> <ul style="list-style-type: none"> - year (4 digits, padded with 0 if necessary) - month, day, hour, min, sec - Met data in the same sequence as given in the header - More than 8 met data types: Use continuation lines 	1X,I4.4, 5(1X,I2), mF7.1 4X,10F7.1

Table A44 : Meteorological Data File – Example

-----+ TABLE A44 METEOROLOGICAL DATA FILE - EXAMPLE +-----+									
4.02									RINEX VERSION / TYPE
GR50 V4.11									
bako									MARKER NAME
23101M002									MARKER NUMBER
3	PR	TD	HR						# / TYPES OF OBSERV
Press.	PTU300		M2710010						PR SENSOR MOD/TYPE/ACC
Temp.	PTU300		M2710010						TD SENSOR MOD/TYPE/ACC
Rel.Hum	PTU300		M2710010						HR SENSOR MOD/TYPE/ACC
-1836969.2810	6065617.0086		-716257.8580		158.1170	PR	SENSOR	POS	XYZ/H
-1836969.2810	6065617.0086		-716257.8580		158.1170	TD	SENSOR	POS	XYZ/H
-1836969.2810	6065617.0086		-716257.8580		158.1170	HR	SENSOR	POS	XYZ/H
									END OF HEADER
2021	1	7	0	0	0	993.3	23.0	90.0	
2021	1	7	0	0	30	993.3	23.0	90.0	
2021	1	7	0	1	0	993.3	23.1	90.0	
2021	1	7	0	1	30	993.3	23.1	90.0	
2021	1	7	0	2	0	993.3	23.1	90.0	
-----+ ---1 0--- ---2 0--- ---3 0--- ---4 0--- ---5 0--- ---6 0--- ---7 0--- ---8									

8.6 Reference Phase Alignment by Constellation and Frequency Band

Phase alignment in RINEX was introduced from RINEX 3.01 as a way to align phases within a signal in a specific constellation with no ambition to align across constellations.

This alignment of phases allows interoperability between different signals in the same frequency while signals are being deployed over a constellation, and when receivers do not track the same set of signals for all satellites of a constellation.

Table A45 : Reference Phase Alignment by Frequency Band

TABLE A45 Reference Phase Alignment by Frequency Band					
System	Frequency Band	Frequency [MHz]	Signal	RINEX Observation Code	Phase Alignment
GPS	L1	1575.42	C/A	L1C	None (Reference Signal)
			L1C-D	L1S	Must be aligned to L1C
			L1C-P	L1L	Must be aligned to L1C
			L1C-(D+P)	L1X	Must be aligned to L1C
			P	L1P	Must be aligned to L1C
			Z-tracking	L1W	Must be aligned to L1C
			Codeless	L1N	Must be aligned to L1C
			M (RMP)	L1R	Restricted (see Note 3)
	L2 (See Note 1)	1227.60	C/A	L2C	For Block II/IIA/IIR; None, For Block IIR-M/IIF/III; Must be aligned to L2P (See Note 2)
			Semi-codeless	L2D	None
			L2C(M)	L2S	Must be aligned to L2P
			L2C(L)	L2L	Must be aligned to L2P
			L2C(M+L)	L2X	Must be aligned to L2P
			P	L2P	None (Reference Signal)
GLONASS	G1	1602 + k*9/16	Z-tracking	L2W	None
			Codeless	L2N	None
			M (RMP)	L1R	Restricted (see Note 3)
	G1a	1600.995	I	L5I	None (Reference Signal)
			Q	L5Q	Must be aligned to L5I
			I+Q	L5X	Must be aligned to L5I
			C/A	L1C	None (Reference Signal)
			P	L1P	Must be aligned to L1C
			L1OCd	L4A	None (Reference Signal)
			L1OCp	L4B	None
			L1OCd+ L1OCd	L4X	None

TABLE A45
Reference Phase Alignment by Frequency Band

System	Frequency Band	Frequency [MHz]	Signal	RINEX Observation Code	Phase Alignment
GLONASS	G2	1246 + k*7/16	C/A	L2C	None (Reference Signal)
			P	L2P	Must be aligned to L2C
	G2a	1248.06	L2CSI	L6A	None (Reference Signal)
			L2OCp	L6B	None
			L2CSI+ L2OCp	L6X	None
	G3	1202.025	I	L3I	None (Reference Signal)
			Q	L3Q	Must be aligned to L3I
			I+Q	L3X	Must be aligned to L3I
Galileo	E1	1575.42	B I/NAV OS/CS/SoL	L1B	None (Reference Signal)
			C no data	L1C	Must be aligned to L1B
			B+C	L1X	Must be aligned to L1B
	E5A	1176.45	I	L5I	None (Reference Signal)
			Q	L5Q	Must be aligned to L5I
			I+Q	L5X	Must be aligned to L5I
	E5B	1207.140	I	L7I	None (Reference Signal)
			Q	L7Q	Must be aligned to L7I
			I+Q	L7X	Must be aligned to L7I
	E5(A+B)	1191.795	I	L8I	None (Reference Signal)
			Q	L8Q	Must be aligned to L8I
			I+Q	L8X	Must be aligned to L8I
	E6	1278.75	B	L6B	None (Reference Signal)
			C	L6C	Must be aligned to L6B
			B+C	L6X	Must be aligned to L6B
QZSS	L1 <i>(See Note 6)</i>	1575.42	C/A	L1C	None (Reference Signal)
			C/B	L1E	None (Reference Signal)
			L1C (D)	L1S	Must be aligned to L1C/L1E
			L1C (P)	L1L	Must be aligned to L1C/L1E
			L1C-(D+P)	L1X	Must be aligned to L1C/L1E
			L1S	L1Z	N/A
			L1Sb	L1B	N/A
	L2	1227.60	L2C (M)	L2S	None (Reference Signal)
			L2C (L)	L2L	Must be aligned to L2S
			L2C (M+L)	L2X	Must be aligned to L2S
	L5	1176.45	I	L5I	None (Reference Signal)
			Q	L5Q	Must be aligned to L5I
			I+Q	L5X	Must be aligned to L5I

TABLE A45
Reference Phase Alignment by Frequency Band

System	Frequency Band	Frequency [MHz]	Signal	RINEX Observation Code	Phase Alignment
	L5S	1176.45	I	L5D	None (Reference Signal)
			Q	L5P	Must be aligned to L5D
			I+Q	L5Z	Must be aligned to L5D
	L6 <i>(See Note 5)</i>	1278.75	L6D	L6S	None (Reference Signal)
			L6P	L6L	None
			L6(D+P)	L6X	None
			L6E	L6E	None
			L6(D+E)	L6Z	None
BDS	B1	1561.098	I	L2I	None (Reference Signal) <i>(See Note 4)</i>
			Q	L2Q	Must be aligned to L2I
			I+Q	L2X	Must be aligned to L2I
	B1C	1575.42	Data (D)	L1D	None (Reference Signal)
			Pilot(P)	L1P	Must be aligned to L1D
			D+P	L1X	Must be aligned to L1D
	B1A	1575.42	Data (D)	L1S	None (Reference Signal)
			Pilot(P)	L1L	Must be aligned to L1S
			D+P	L1Z	Must be aligned to L1S
	B2a	1176.45	Data (D)	L5D	None (Reference Signal)
			Pilot(P)	L5P	Must be aligned to L5D
			D+P	L5X	Must be aligned to L5D
	B2 (BDS-2)	1207.140	I	L7I	None (Reference Signal)
			Q	L7Q	Must be aligned to L7I
			I+Q	L7X	Must be aligned to L7I
	B2b (BDS-3)	1207.140	Data (D)	L7D	None (Reference Signal)
			Pilot(P)	L7P	Must be aligned to L7D
			D+P	L7Z	Must be aligned to L7D
	B2a+B2b (BDS-3)	1191.795	Data (D)	L8D	None (Reference Signal)
			Pilot(P)	L8P	Must be aligned to L8D
			D+P	L8X	Must be aligned to L8D
	B3	1268.52	I	L6I	None (Reference Signal)
			Q	L6Q	Must be aligned to L6I
			I+Q	L6X	Must be aligned to L6I
	B3A (BDS-3)	1268.52	Data (D)	L6D	None (Reference Signal)
			Pilot (P)	L6P	Must be aligned to L6D
			D+P	L6Z	Must be aligned to L6D

TABLE A45
Reference Phase Alignment by Frequency Band

System	Frequency Band	Frequency [MHz]	Signal	RINEX Observation Code	Phase Alignment
NavIC	L1	1575.42	D	L1D	None (Reference Signal)
			P	L1P	Must be aligned to L1D
			D+P	L1X	Must be aligned to L1D
	L5	1176.45	A SPS	L5A	None (Reference Signal)
			B RS(D)	L5B	Restricted (See Note 3)
			C RS(P)	L5C	None
			B+C	L5X	Must be aligned to L5A
			A SPS	L9A	None (Reference Signal)
			B RS(D)	L9B	Restricted (See Note 3)
			C RS(P)	L9C	None
			B+C	L9X	Must be aligned to L9A

Notes:

1. The GPS L2 phase shift values ignore FlexPower when the phases of the L2W and L2C can be changed on the satellite. The phases L2C shall be aligned to L2P when FlexPower is off, the phase shift shall remain applied even if FlexPower is enabled.
2. The phase of the L2 C/A signal is dependent on the GPS satellite generation.
3. There is no public information available concerning the restricted service signals.
4. Note: Both C1x and C2x (RINEX 3.01 definition) have been used to identify the B1 frequency signals in RINEX 3.02 files. If C2x coding is read in a RINEX 3.02 file treat it as equivalent to C1x.
5. L6D, L6P, L6E are identical to L61/L62(code1), L61(code2), L62(code2) in IS-QZSS-L6 respectively
6. Either L1C or L1E is broadcast from each QZSS Block IIA or later.