

# Multi-GNSS Working Group Meeting

Oliver Montenbruck



# Agenda

Time (UTC)	Speaker	Topic
13:00-13:05	O. Montenbruck	Introduction
13:05-13:15	All	1. Transfer of MGEX products to standard IGS product directory
13:15-14:10	Various	2. MGEX Product Combination
13:15-13:22	P. Steigenberger	2.1. Assessment of MGEX product consistency
13:22-13:30	G. Mansur	2.2. Multi-GNSS orbit combination at GFZ
13:30-13:37	S. Masoumi	2.3. Multi-GNSS product combination at GA and ACC
13:37-13:45	J. Geng	2.4. Multi-GNSS clock and bias combination in PPP-AR WG
13:45-13:52	G. Chen	2.5. iGMAS orbit and clock combination
13:52-14:10	All	2.6. Discussion of orbit/clock combination (requirements, way-forward)
14:10-14:15	P. Steigenberger	3. Satellite metadata file
14:15-14:20	O. Montenbruck	4. GPS L1/L5 product
14:20-14:30	O. Montenbruck, all	Formulation of WG recommendations

# 1. Transfer of MGEX Product Repository

Oliver Montenbruck



## Transfer of MGEX Products Repository

- Pending Recommendation “*Move to long product file names for MGEX products (by 1 Jan 2019) and store the products in standard IGS directory tree*” from IGS 2018 Workshop
- Currently “products/mgex/<www>”; then “products/<www>”;
- Cover ALL products from start of MGEX
- No conflict of names
  - MGEX ACs use long product file names (no short names since week 2038, end Jan 2019)
  - Old 8.3 names are unique (use of third letter “m” in AC name)
- Will be coordinated by Data Center Coordinator (Thanks to Jianghui Geng!)
- Target date 30 Sep. 2022, 2 months lead time for notification of users by IGS mail (**TBC**)

## 2. MGEX Product Combination



# Motivation

- GNSS orbit/clock/bias combination addressed in previous research and s/w implementations
- Operational IGS system limited to GPS
- Prototype multi-GNSS orbit combination by IGS ACC (GA/MIT)
  - <https://igs.org/acc/experimental-multi-gnss-combinations/>
  - <http://igsacc.s3.eu-central-1.amazonaws.com/index.html?prefix=products/mgex/final/>
- Parallel activities GFZ (orbit), Wuhan University (clock & bias), iGMAS (orbit and clock)
- No comprehensive and “perfect” operational process within IGS
- Identify way forward toward consolidated IGS multi-GNSS product combination

## Background Literature

- Beutler G, Kouba J, Springer TA (1995) Combining the orbits of the IGS analysis centers. Bull Geodesique 69:200–222
- Kobel C. S., Arnold D., Jäggi A. (2019). Combination of precise orbit solutions for Sentinel-3A using Variance Component Estimation. Advances in Geosciences 50:27-37. <https://doi.org/10.5194/adgeo-50-27-2019>
- Mansur G, Sakic P, Männel B, Schuh H. (2020) Multi-constellation GNSS orbit combination based on MGEX products. Advances in Geosciences 50:57-64. <https://doi.org/10.5194/adgeo-50-57-2020>
- Mansur G., Sakic P., Brack A., Männel B., Schuh H. (2020). Combination of GNSS orbits using variance component estimation. Preprint <https://doi.org/10.31223/X5MK64>
- Sakic P., Mansur G., Männel B. (2020) A prototype for a Multi-GNSS orbit combination; European GNSS Conference. <https://doi.org/10.23919/ENC48637.2020.9317316>
- Zhou W, Cai H, Chen G, Jiao W, He Q, Yang Y (2022). Multi-GNSS Combined Orbit and Clock Solutions at iGMAS. Sensors. 22(2):457. <https://doi.org/10.3390/s22020457>
- Banville S, Geng J, Loyer S, Schaer S, Springer T, Strasser S (2020). On the interoperability of IGS products for precise point positioning with ambiguity resolution. Journal of Geodesy 94:010. <https://doi.org/10.1007/s00190-019-01335-w>

# 2.1 Consistency of MGEX products

Peter Steigenberger, DLR/GSOC









# MGEX Orbit and Clock Products

Analysis Center	GPS	GLO	GAL	BDS-3	BDS-2	QZSS	Clocks
CNES/CLS	X	X	X				30 s
CODE	X	X	X	X	X	X	30 s
GFZ	X	X	X	X	X	X	30 s
IAC	X	X	X	X	X	X	30 s
JAXA	X	X				X	30 s
SHAO	X	X	X	X	X		5 min
WUM	X	X	X	X	X	X	30 s


# MGEX Orbit Consistency

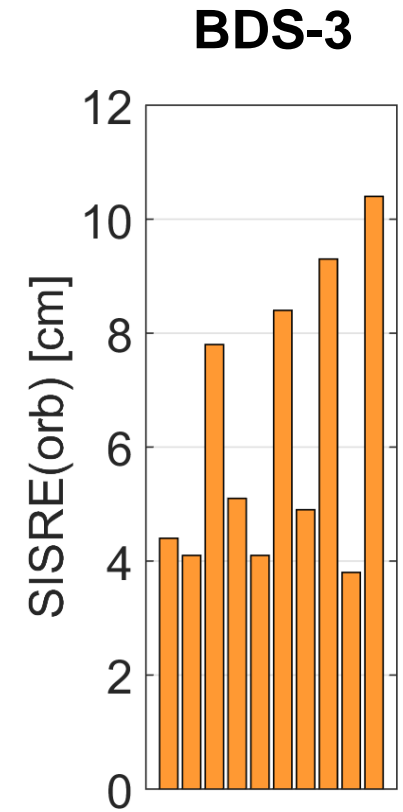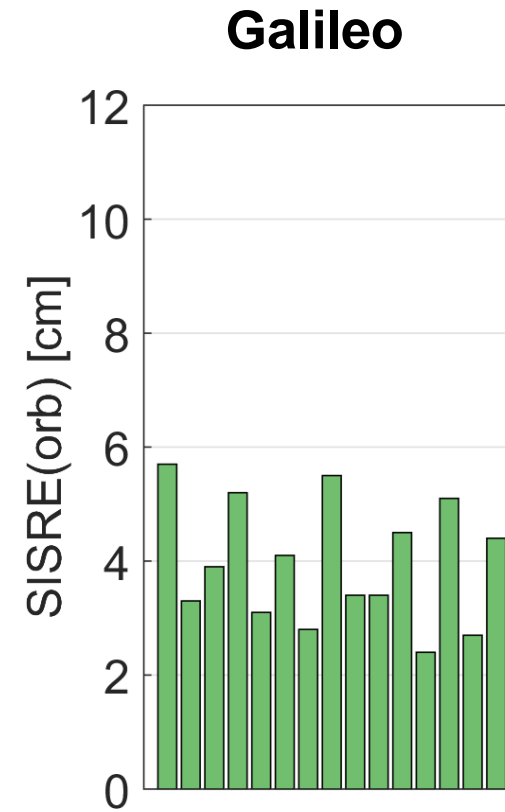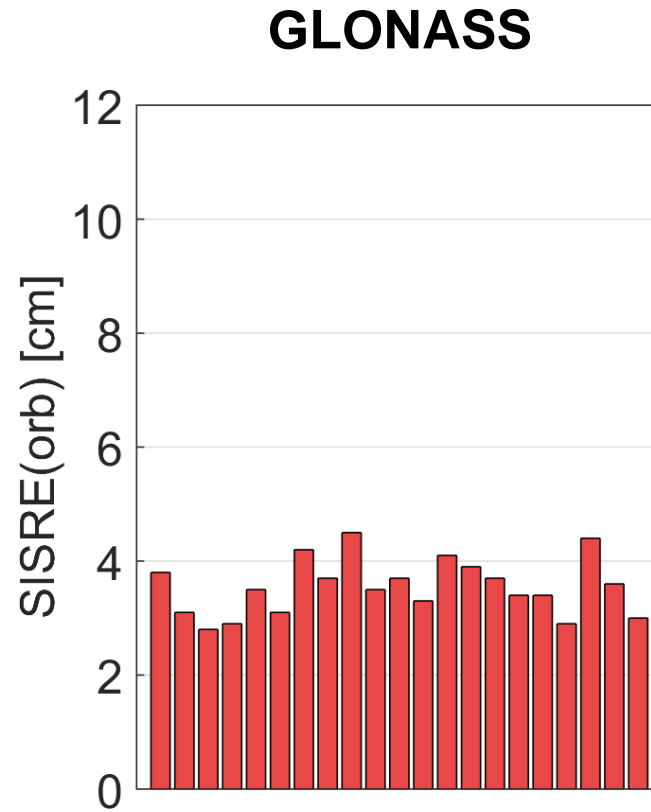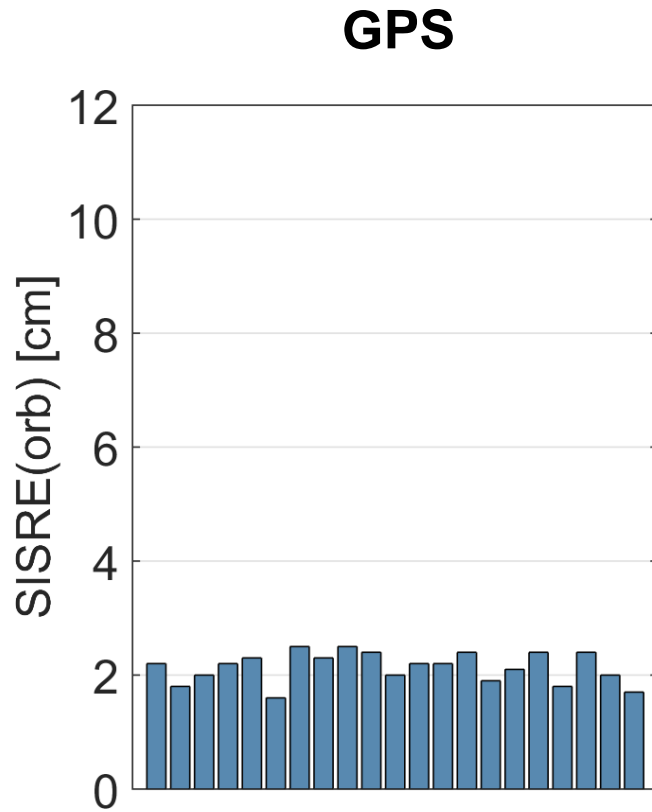


$$\text{SISRE}_{\text{orb}} = \sqrt{w_1^2 R^2 + w_2^2 (A^2 + C^2)}$$

May 2022, only MEO satellites for BDS-3

# Galileo Satellite Laser Ranging Residuals

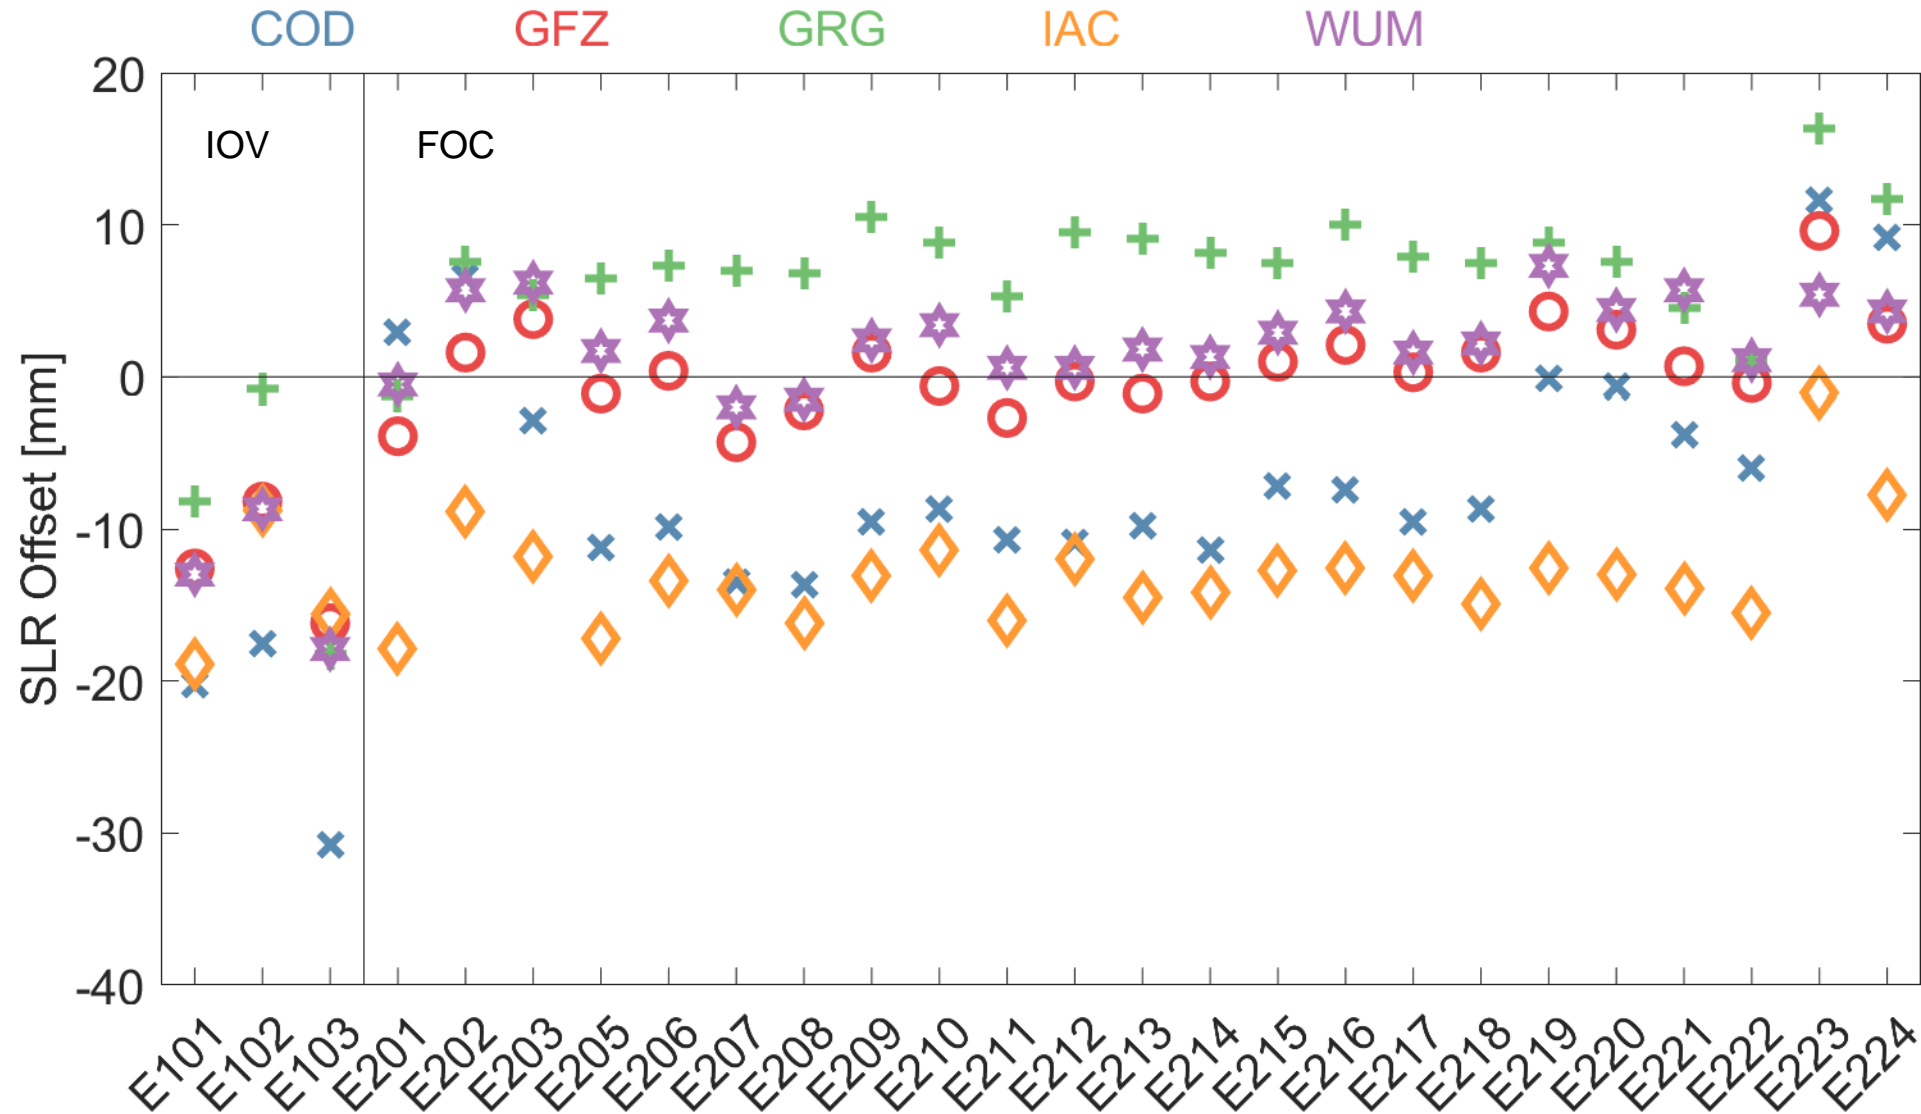




# BDS-3 Satellite Laser Ranging Residuals

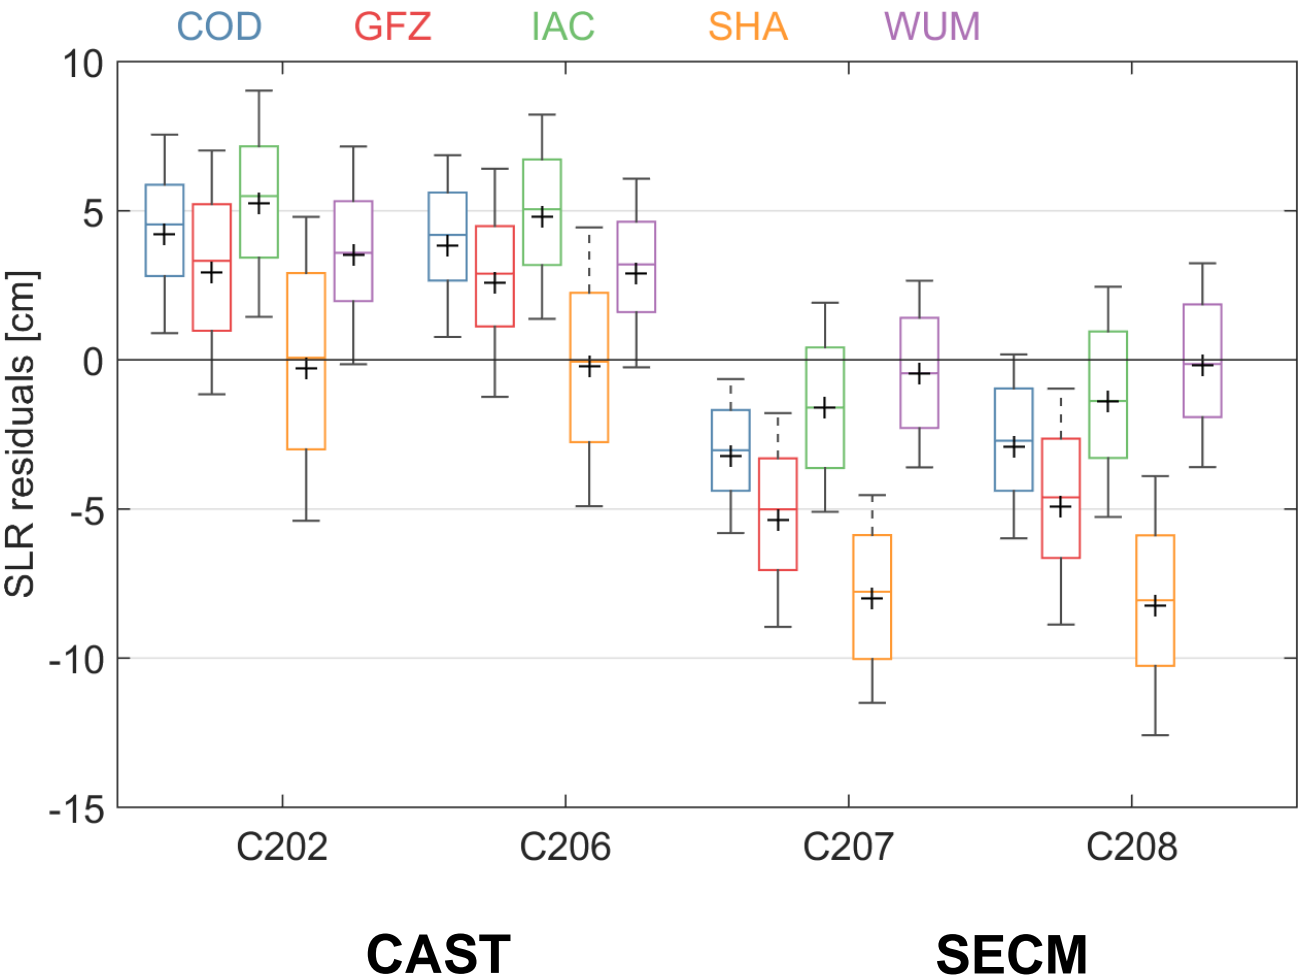

AC	Albedo/IR	Antenna Thrust		
		MEO CAST	MEO SECM	IGSO
COD	No	310 W	280 W	--
GFZ	No	310 W	280 W	100 W
IAC	Yes	200 W	200 W	200 W
SHA	No	--	--	--
WUM	Yes	310 W	280 W	100 W

AC modeling options not as homogeneous as for GPS


# Orbit Scale; Translation and Rotation Stability

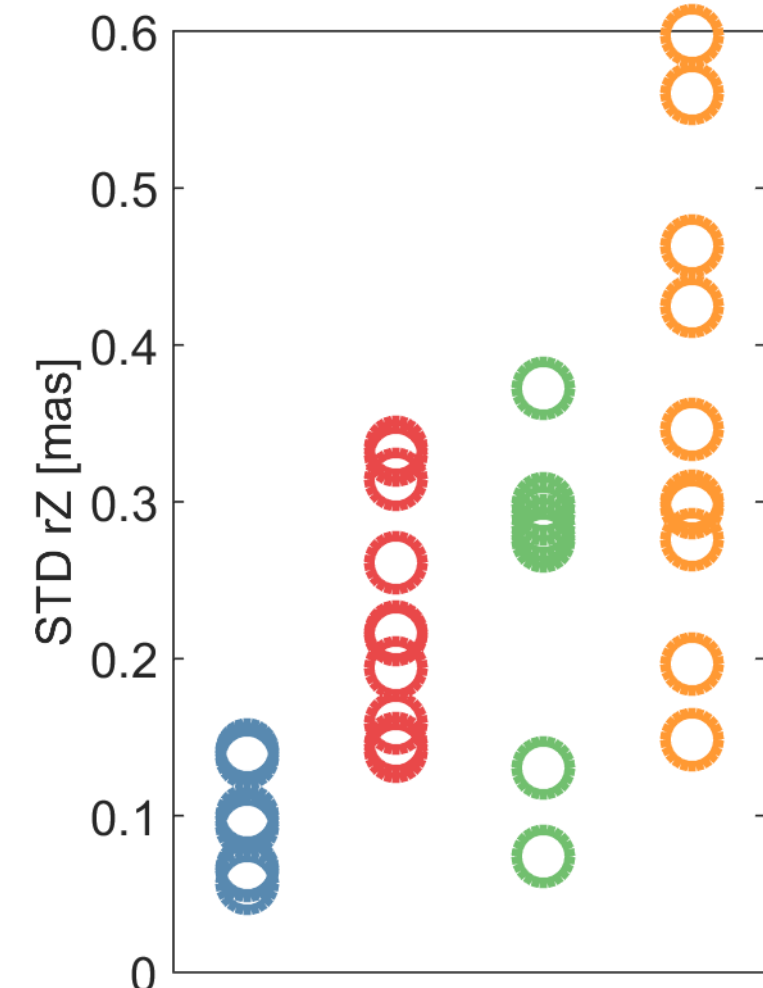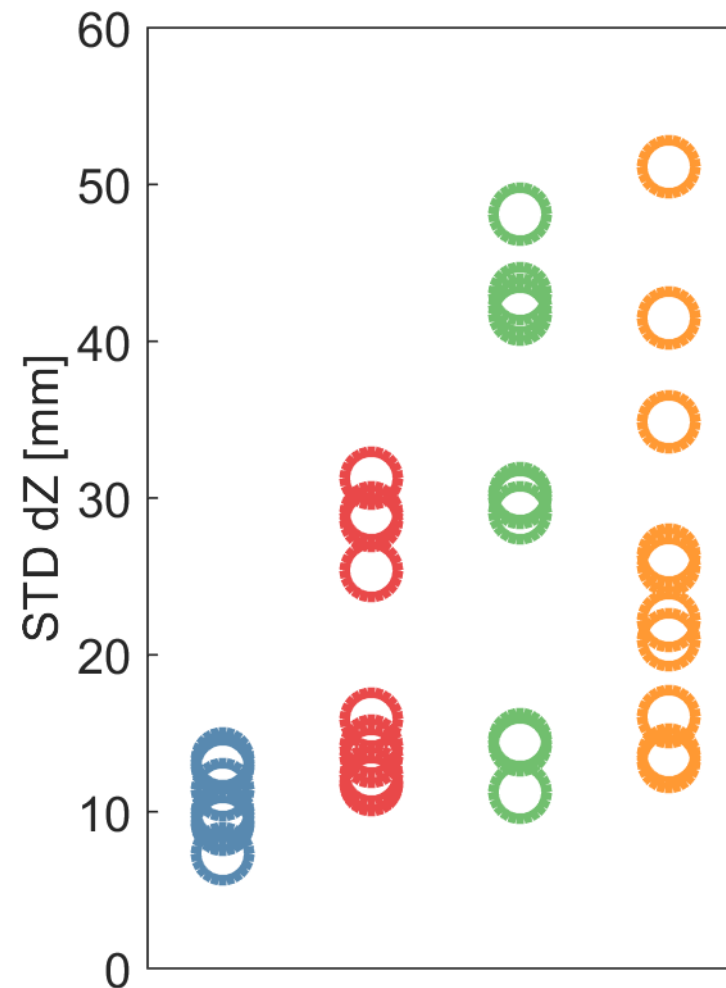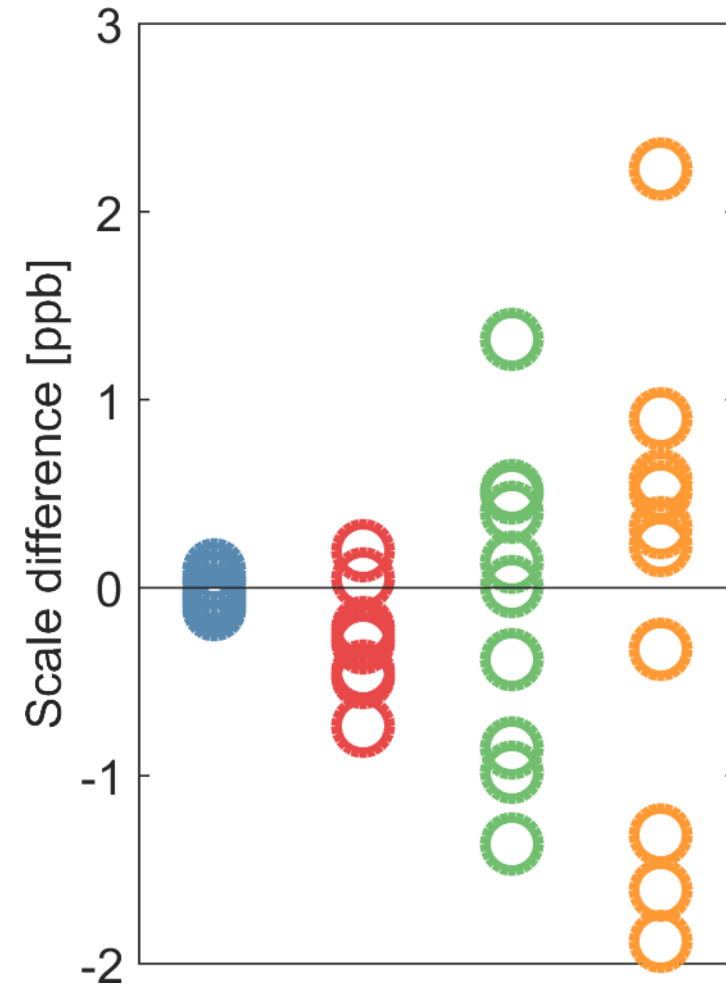

March 2021-February 2022, only MEO satellites for BDS-3, only ACs processing all 4 constellations

GPS GLO GAL BDS-3

# MGEX Clock Consistency

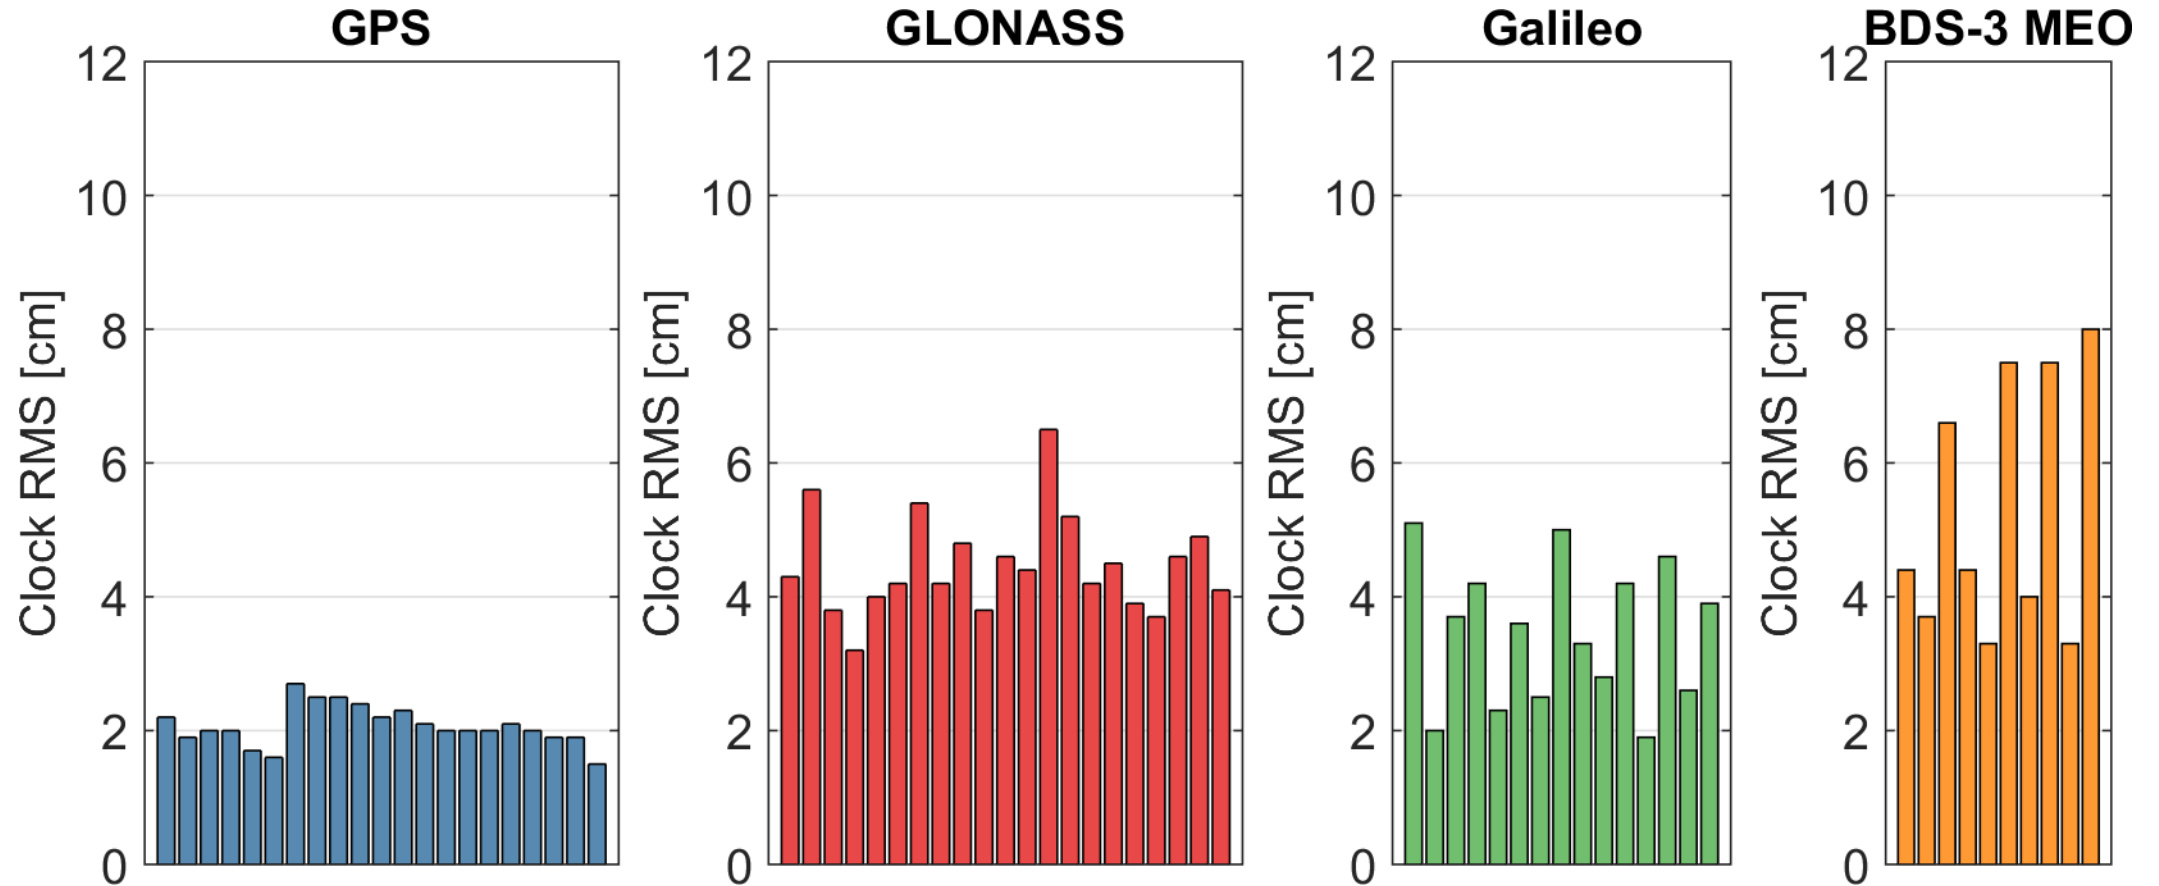

RMS of inter-AC clock differences after removing a constellation mean bias per epoch and a daily satellite-specific bias for May 2022, only MEO satellites considered for BDS-3

# Open Issues

- All IGS ACs are encouraged to process at least all global constellations (GPS, GLO, GAL, BDS-3)
- Analysis summaries not available for all MGEX ACs
- More diverse processing options for BDS-3 than for GPS resulting in degraded consistency
- Do we need detailed recommendations for GAL and BDS modeling as for GPS/GLO repro3?
- BDS-3 SRP modeling deficiencies
  - Incomplete metadata
    - Optical properties
    - Geometry (SAR-antenna, T-shape)
- Extended coverage of SLR tracking of the BDS-3 constellation is strongly encouraged
- How to handle reference frame consistency within and across individual MGEX products?

## 2.2 Multi-GNSS Orbit Combination at GFZ

Gustavo Mansur<sup>1,2</sup> · Pierre Sakic<sup>1,3</sup> · Andreas Brack<sup>1</sup> · Benjamin Maennel<sup>1</sup> · Harald Schuh<sup>1,2</sup>

1 - Deutsches GeoForschungsZentrum GFZ, Potsdam, Germany


2 - Technische Universität Berlin, Berlin, Germany

3 - Institut de Physique du Globe de Paris - Université Paris Cité, Volcanological and seismological observatories, Paris, France






# Orbit Combination - Methodology

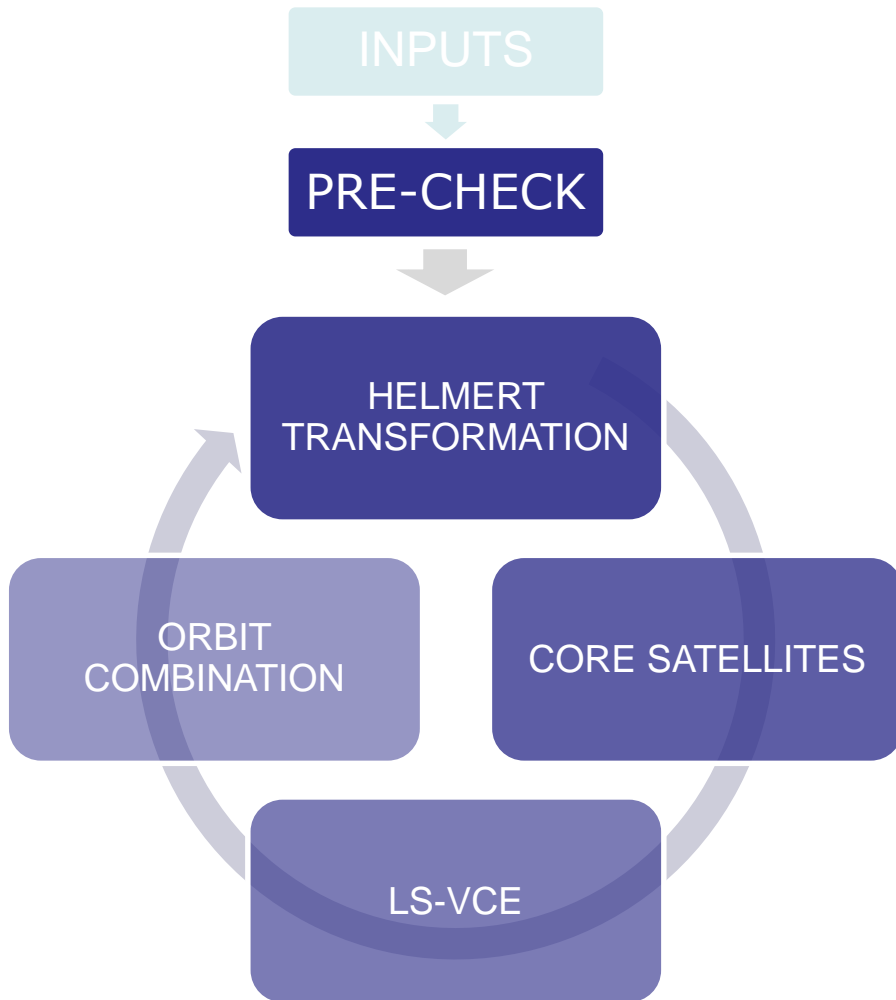

- 1) Rough exclusion of satellites; A mean orbit is computed;
- 2) Helmert Transformation between mean orbit and ACs' solution;
- 3) The set of core satellites ensures that the satellites for computing the variance components are the same for all ACs;
- 4) Estimation of the variance components, using only the core satellites;
- 5) The inverse variances are normalized and then applied as weights to the ACs' orbits.

# Orbit Combination - Results


The figure shows the RMS between the combined orbit and the ACs' products

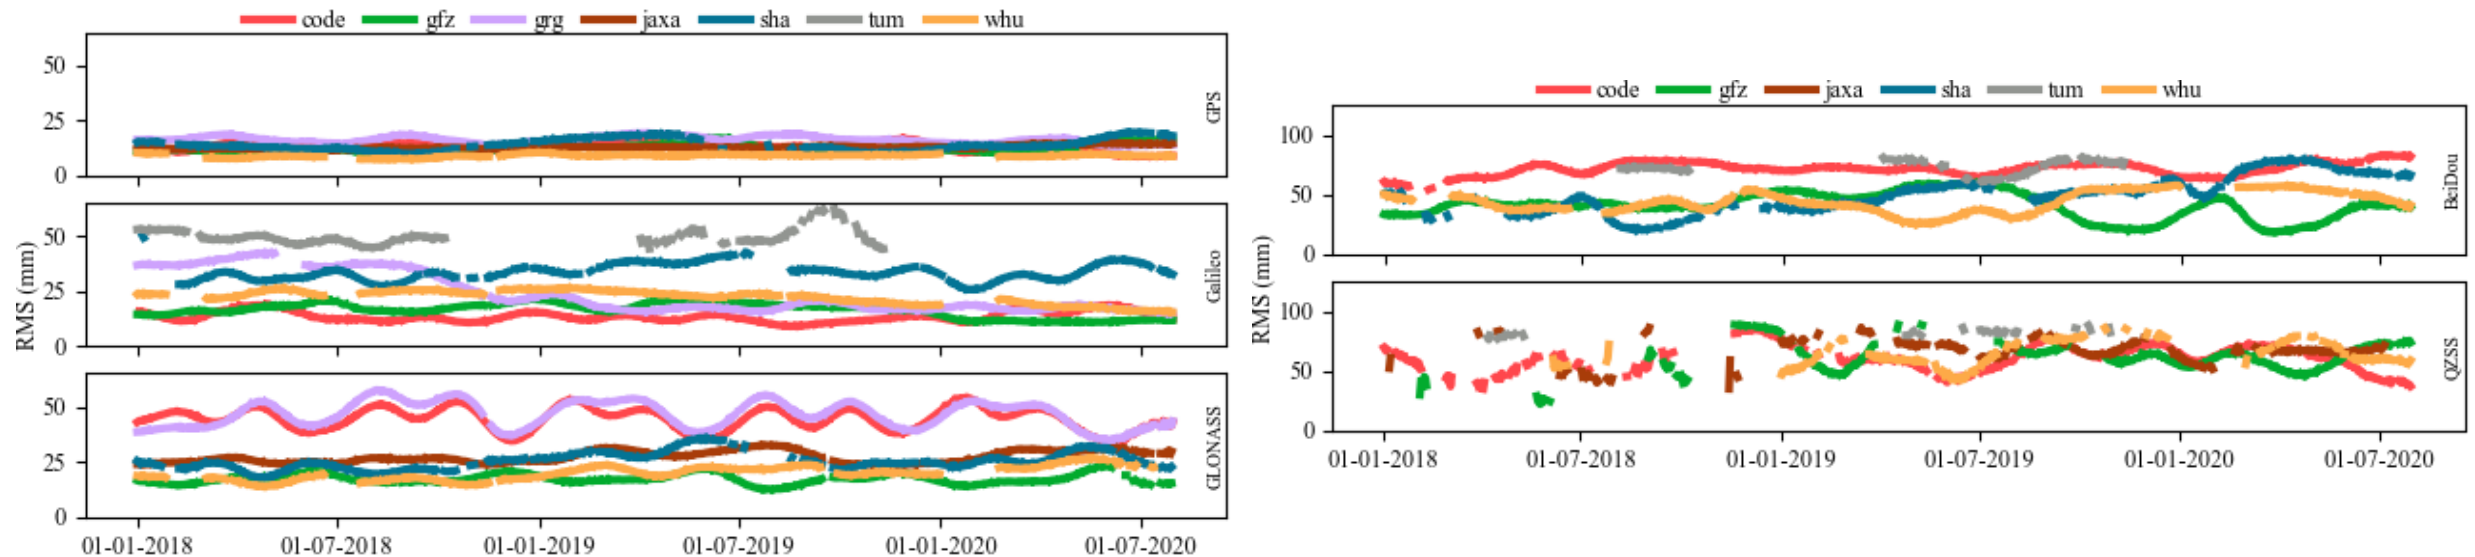

- As a validation of the method, we compared the RMS also for the final IGS regular routine, and our combined solution where the comparison is better than 4 mm.


# Orbit Combination - Results

The figure shows the weight per AC per constellation

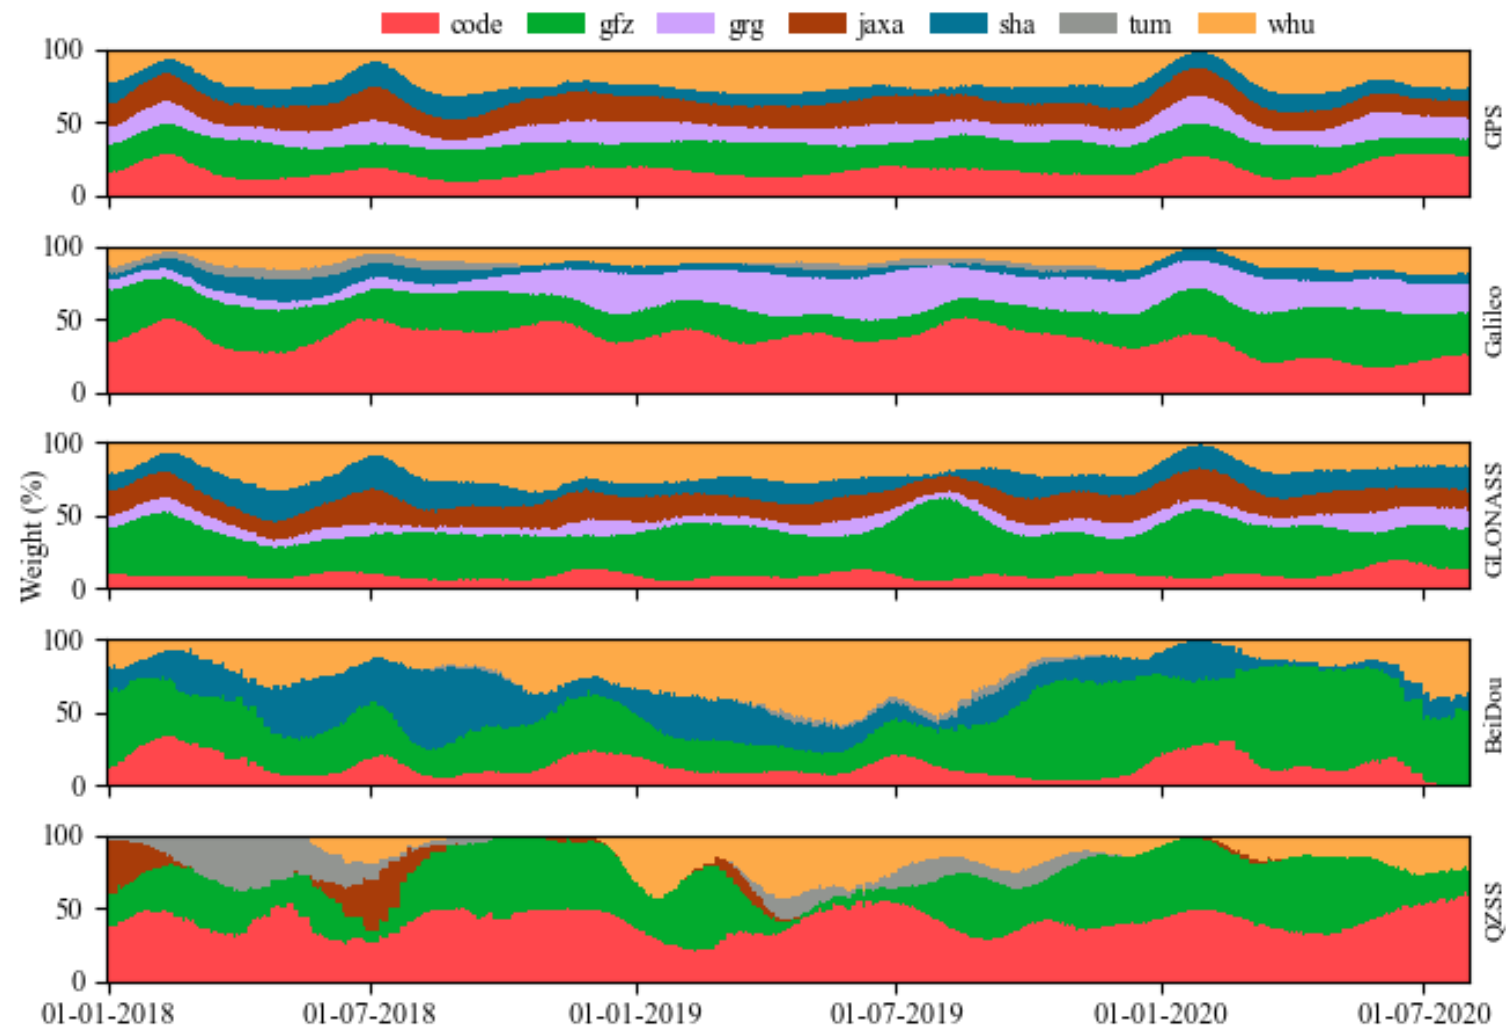

- The AC plus constellation weighting scheme shows the different behavior of the ACs for each system over time, e.g. significant changes for Galileo constellation, when analyzing the weights for GRG, GFZ and CODE.


# Clock Combination - Methodology

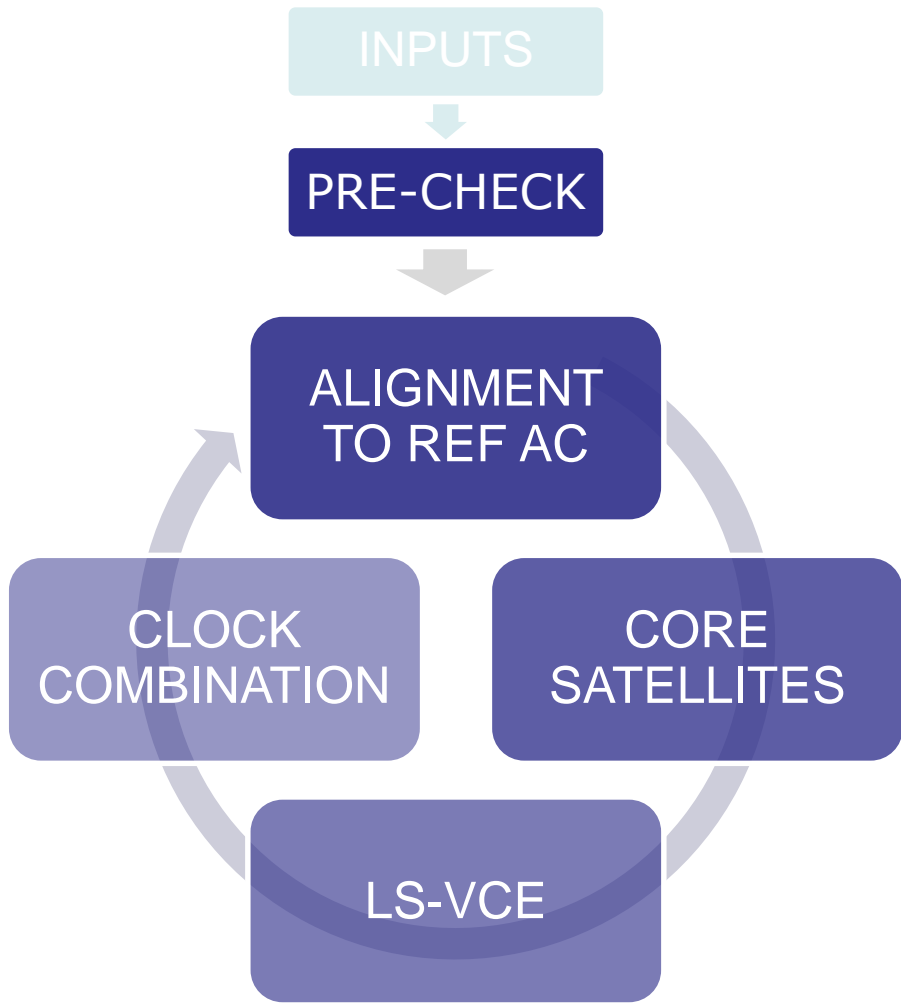

- 1) Rough exclusion of satellites; A reference AC is selected;
- 2) Alignment to the reference AC, using a drift and offset;
- 3) The set of core satellites ensures that the satellites for computing the variance components are the same for all ACs;
- 4) Estimation of the variance components, using only the core satellites;
- 5) The inverse variances are normalized and then applied as weights to the ACs' clocks.

# Clock Combination - Results

The figure shows the RMS between the ACs and the combination for Galileo constellation

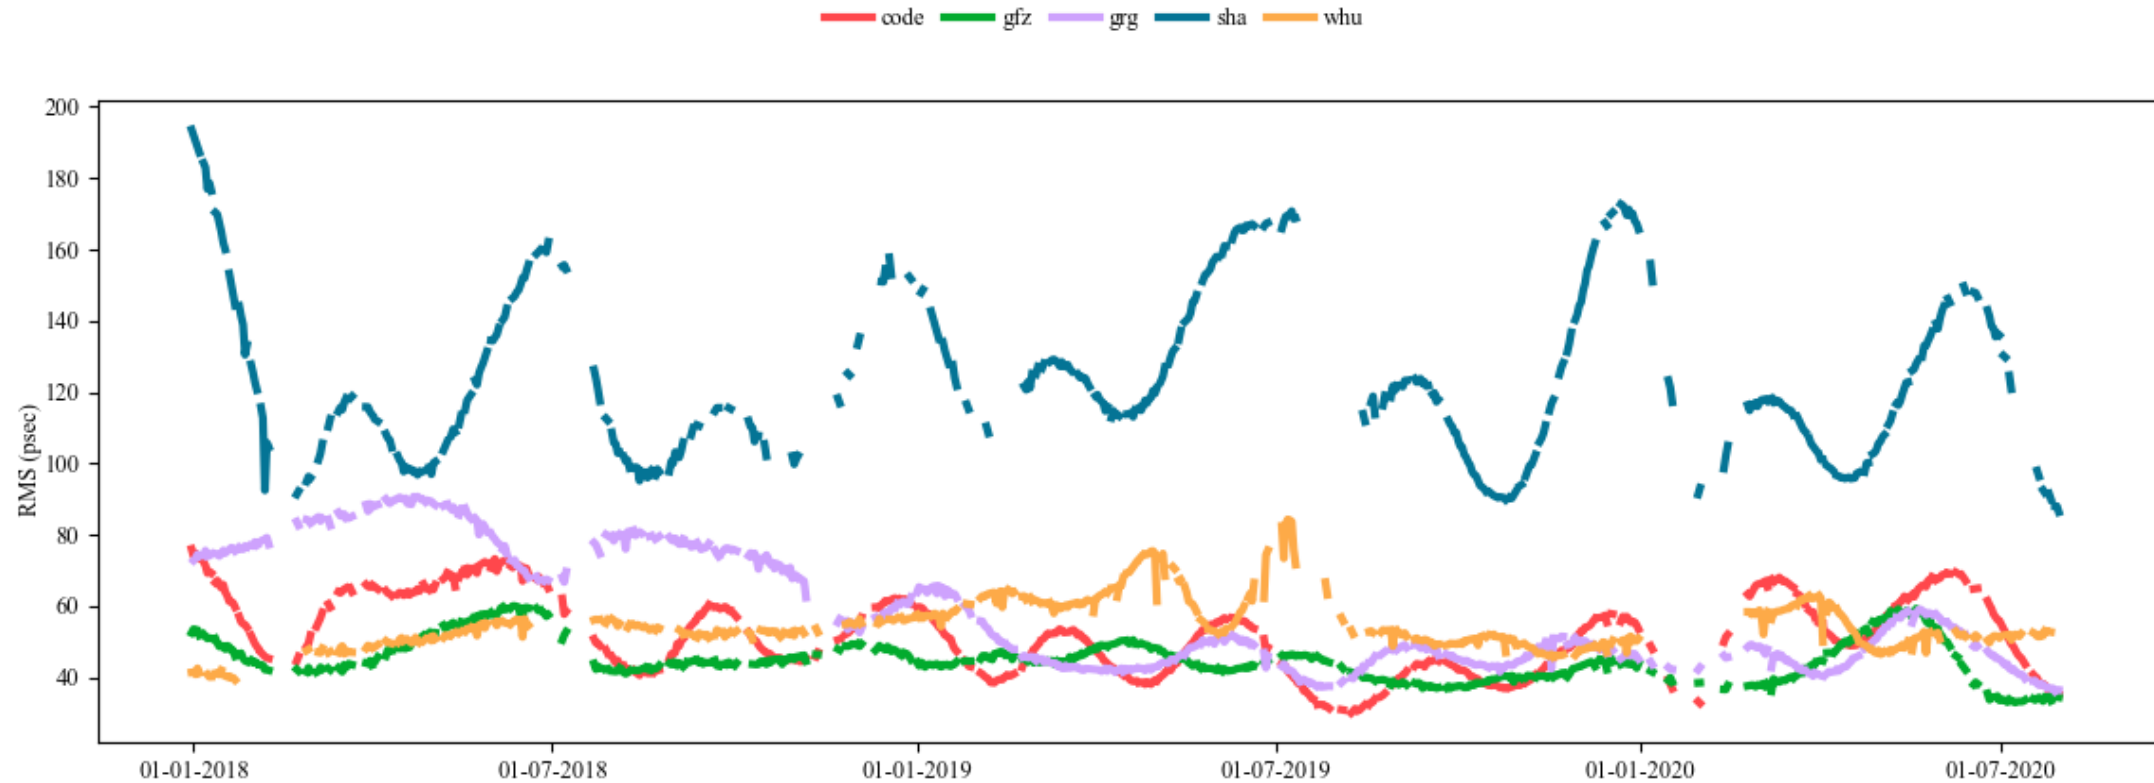

- As a validation of the clock combination we compared with the final IGS clock products, where the agreement is around 40 psec.

# Remarks and Current Work

- The alignment for the MGEX products can only be conducted as a "relative process" since we have no specific SINEX for MGEX solutions
- From the combination results and analysis, we can state that in general the ACs solutions submitted to the MGEX project are getting more stable over the years
- Would be good if the ACs could provide the same set of files e.g.: Orbits, ERP, Clock, SINEX, and bias
- The LSVCE method is now extended to the clock products, yielding in the clock combination for MGEX, also tested with REPRO 3 data

# References


- Mansur G., Sakic P., Männel B., Schuh H. (2020) Multi-constellation GNSS orbit combination based on MGEX products. Advances in Geosciences 50:57-64. <https://doi.org/10.5194/adgeo-50-57-2020>
- Mansur G., Sakic P., Brack A., Männel B., Schuh H. (2020). Combination of GNSS orbits using variance component estimation. Preprint <https://doi.org/10.31223/X5MK64>
- Sakic P., Mansur G., Männel B. (2020) A prototype for a Multi-GNSS orbit combination; European GNSS Conference. <https://doi.org/10.23919/ENC48637.2020.9317316>
- Sakic, P., Mansur, G., Männel, B., Brack, A., & Schuh, H. (2021). An experimental combination of IGS repro3 campaign's orbit products using a variance component estimation strategy. Accepted in the International Association of Geodesy Symposia Proceedings. Preprint on EarthArxiv: <https://doi.org/10.31223/x5k614>


## 2.3 Multi-GNSS Orbit Combination at GA and ACC



Salim Masoumi, GeoScience Australia





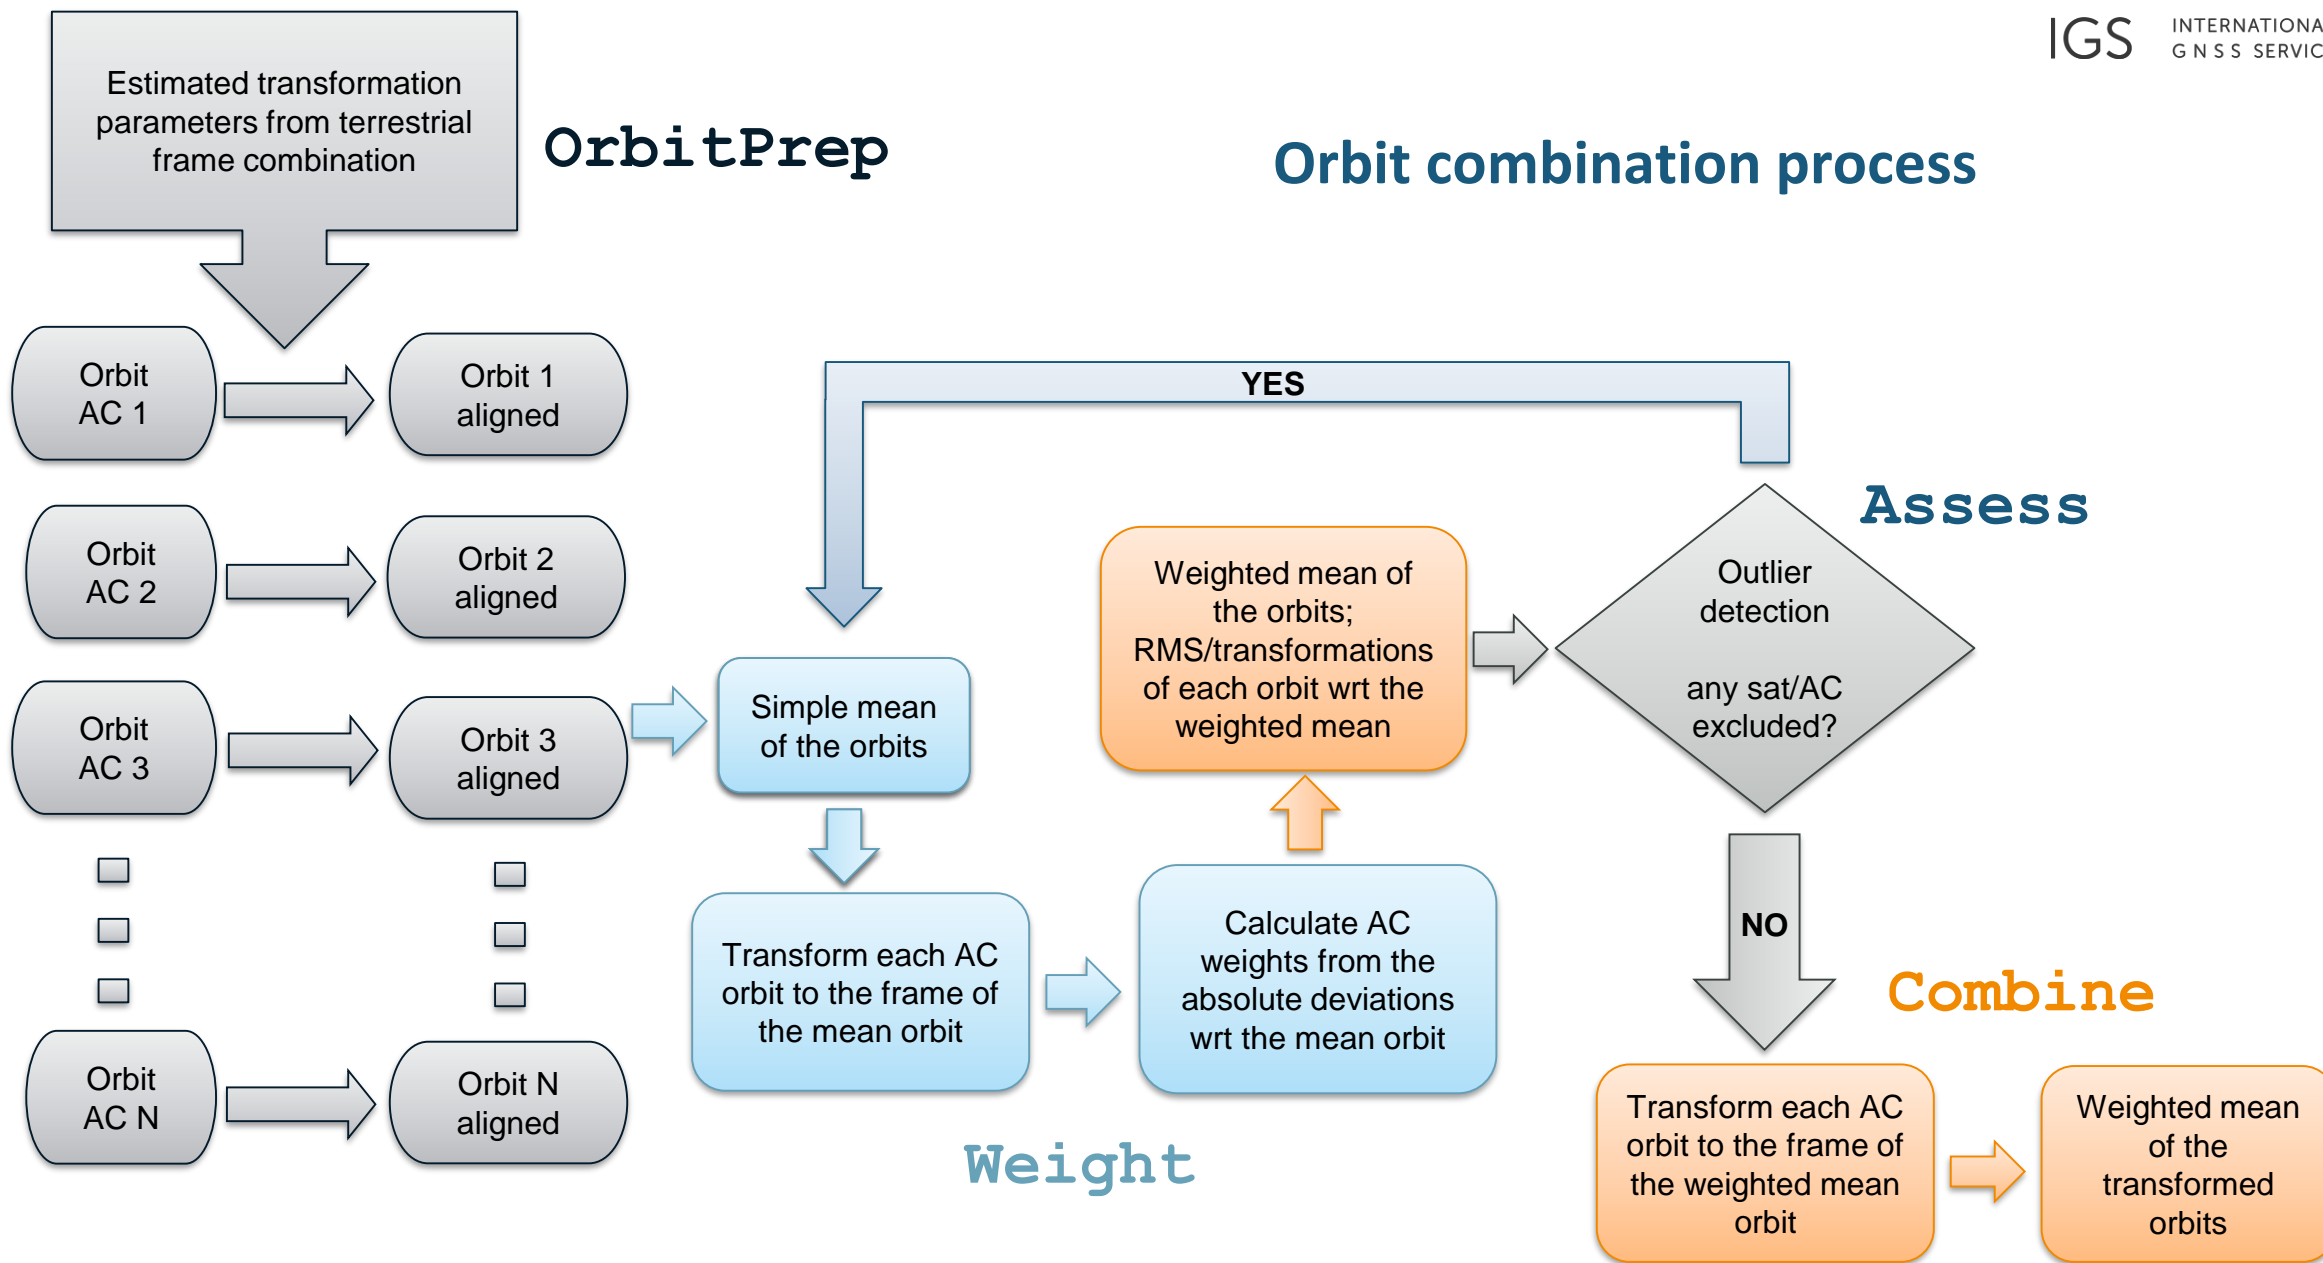




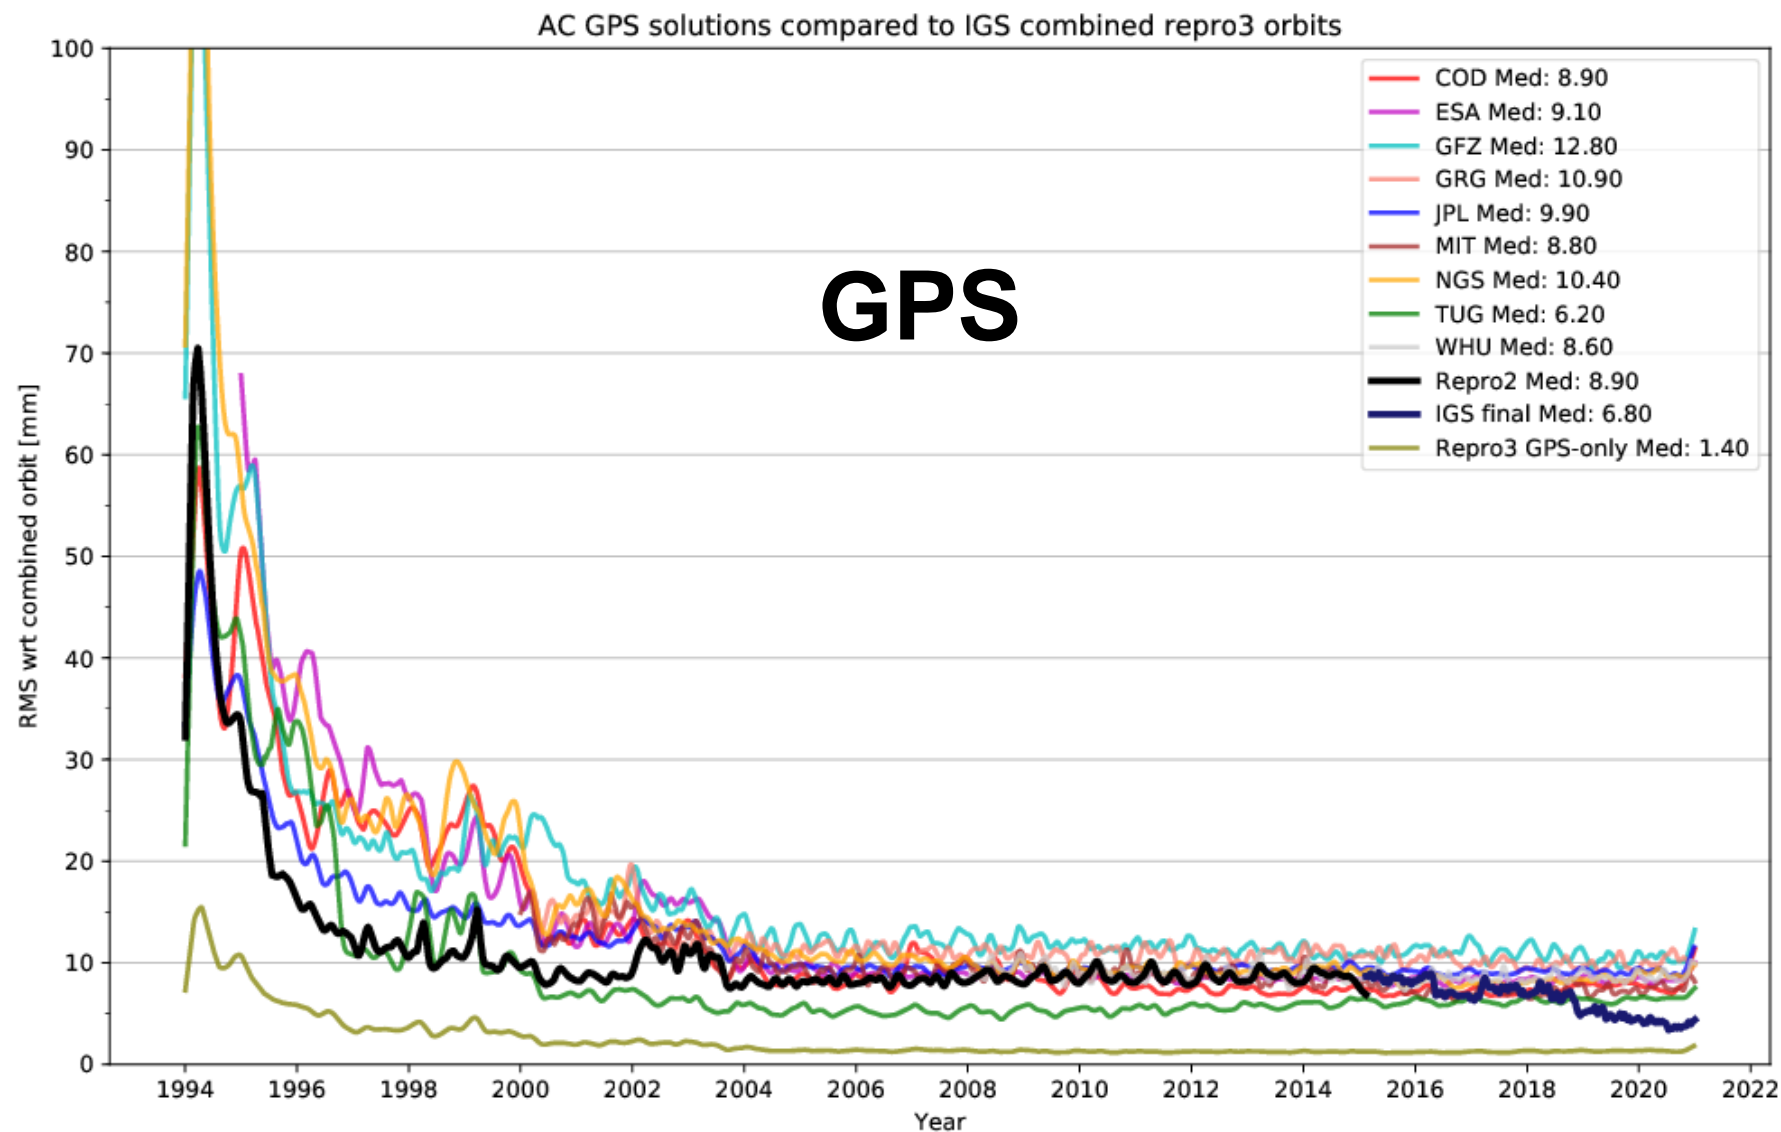


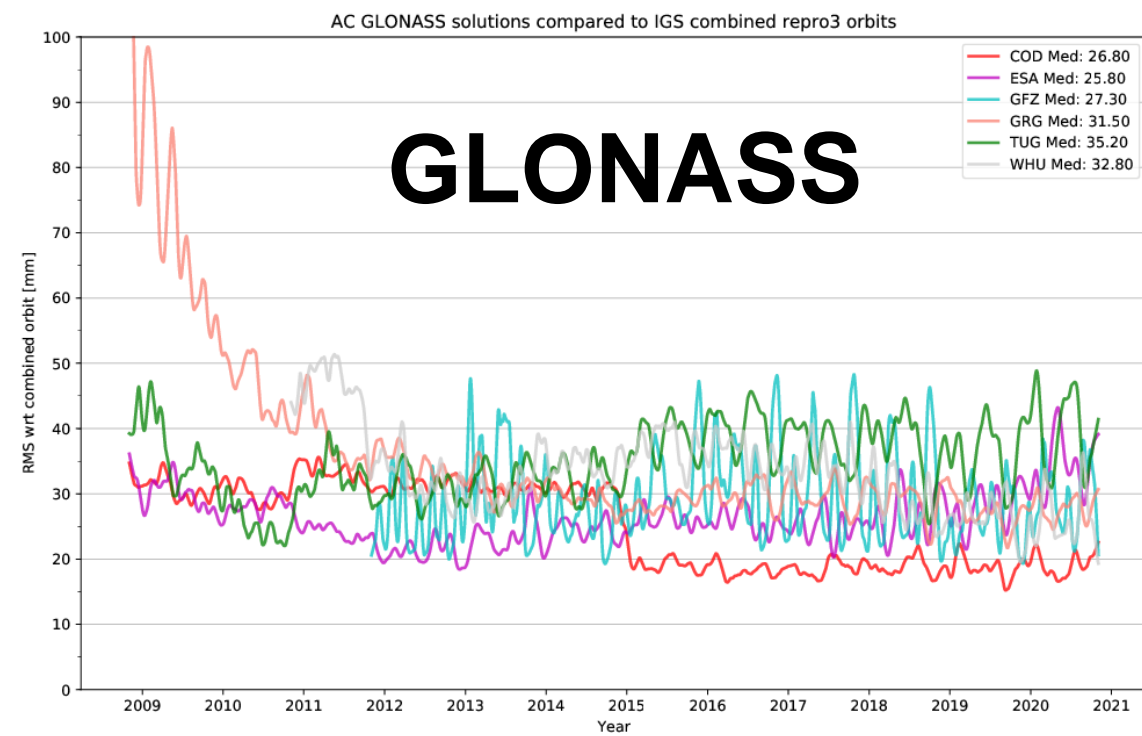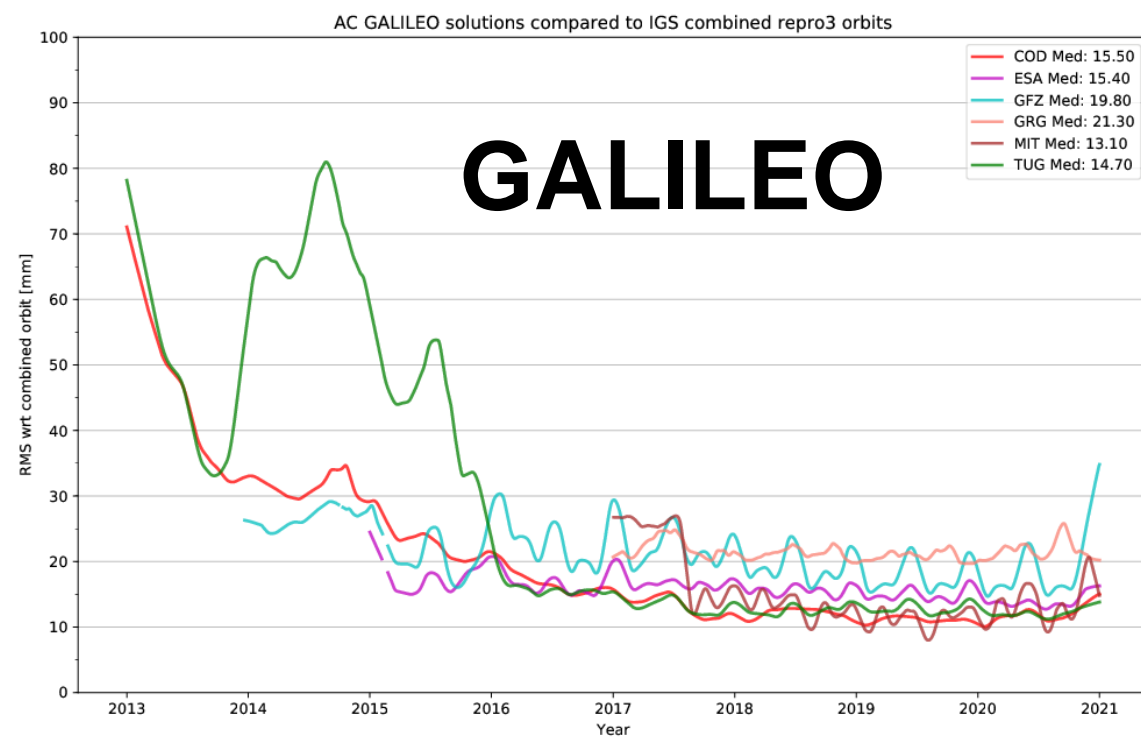

# GPS







IGS INTERNATIONAL  
GNSS SERVICE

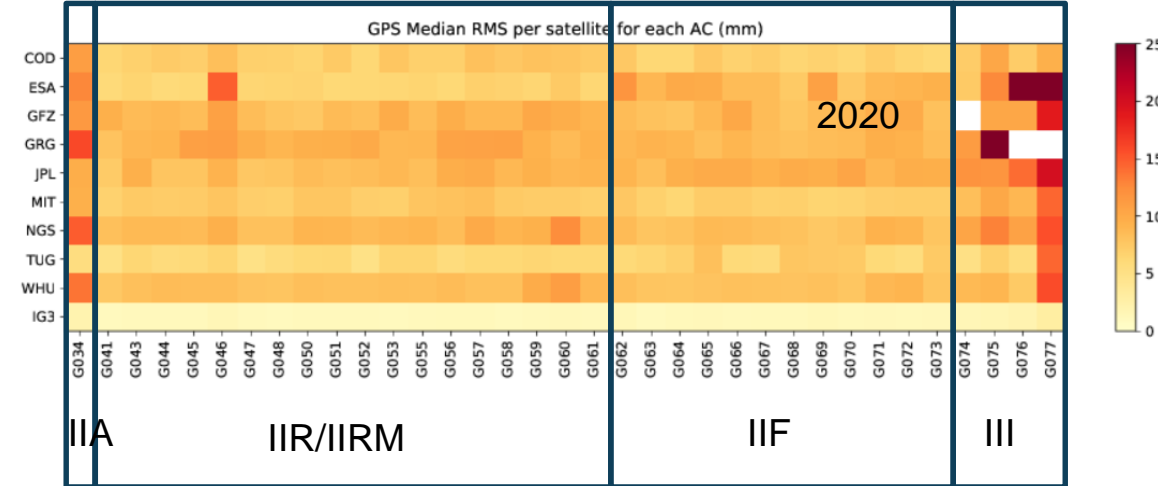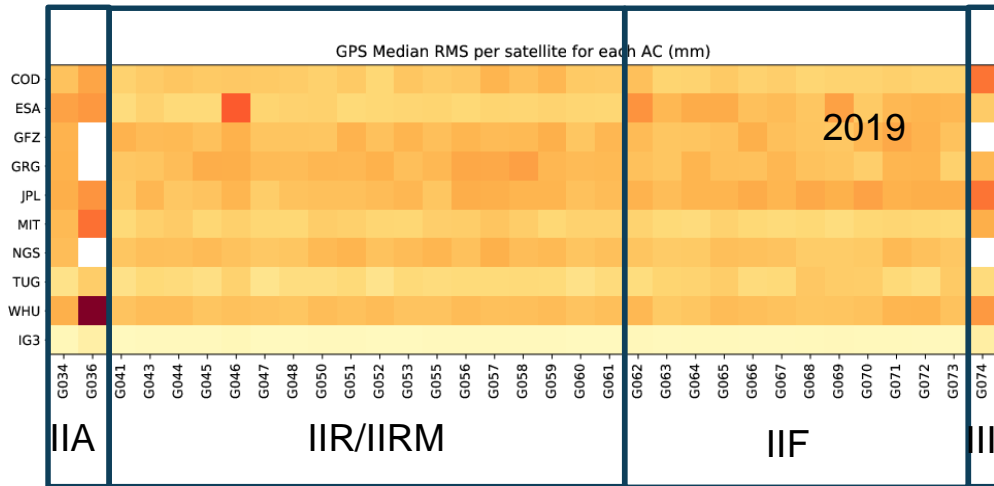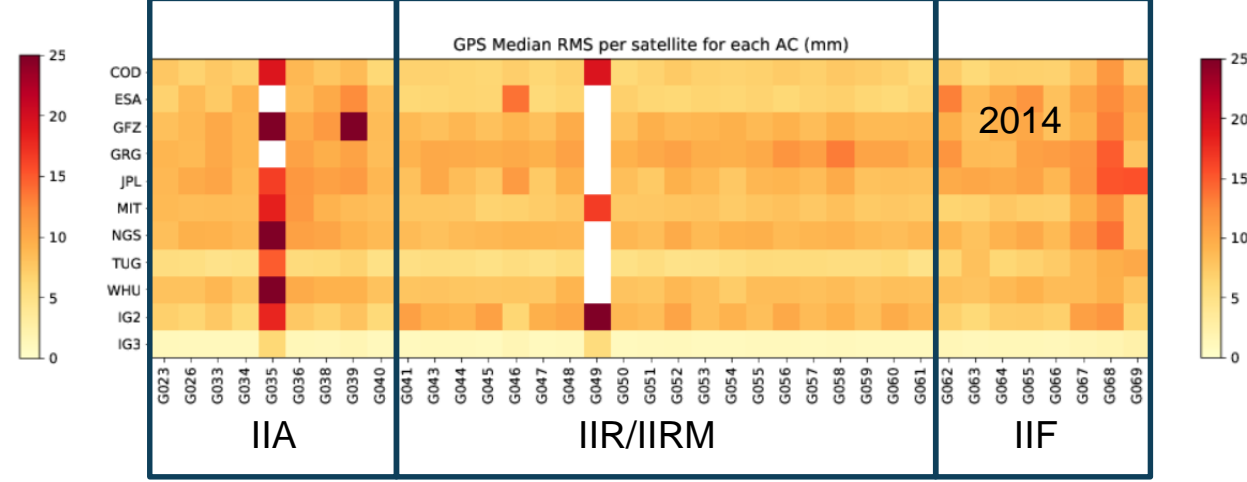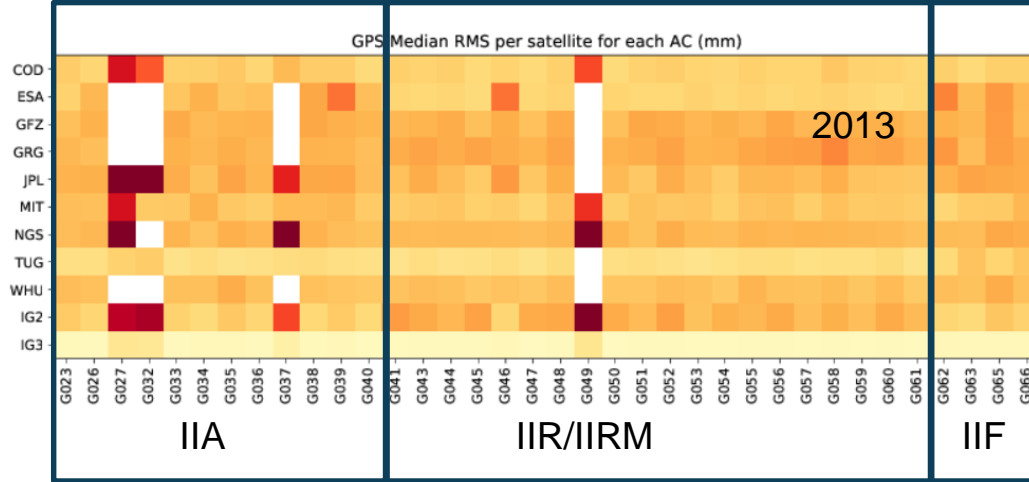





# GALILEO






IGS INTERNATIONAL  
GNSS SERVICE

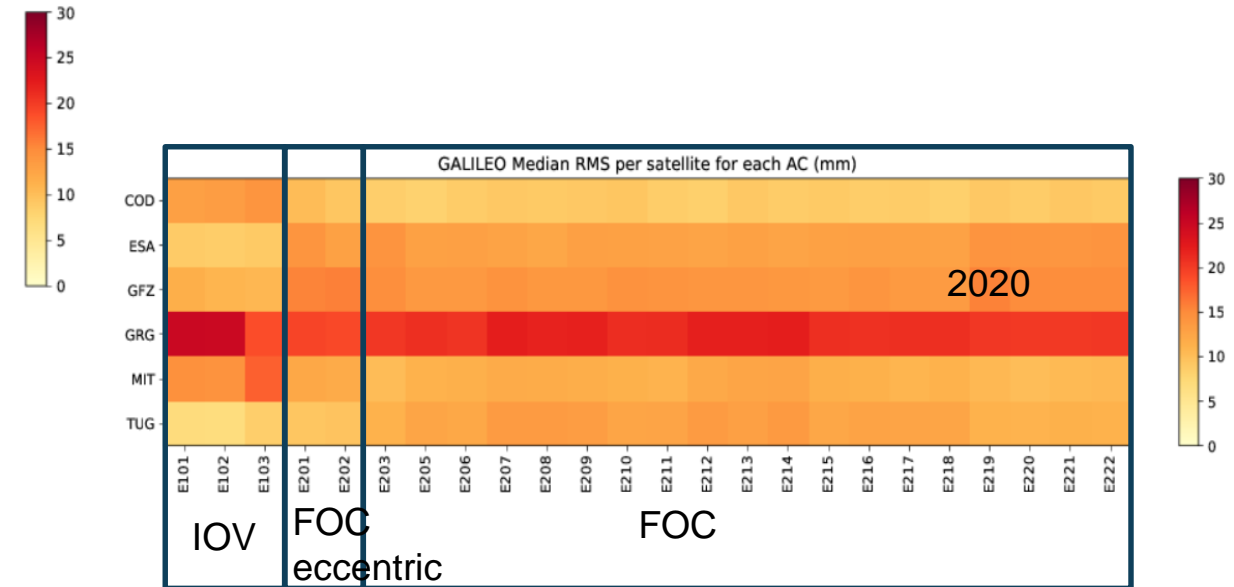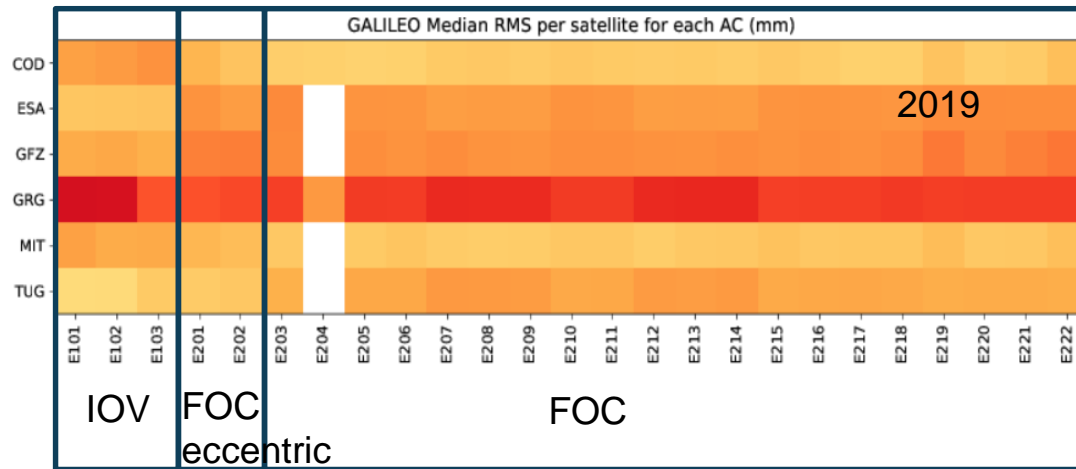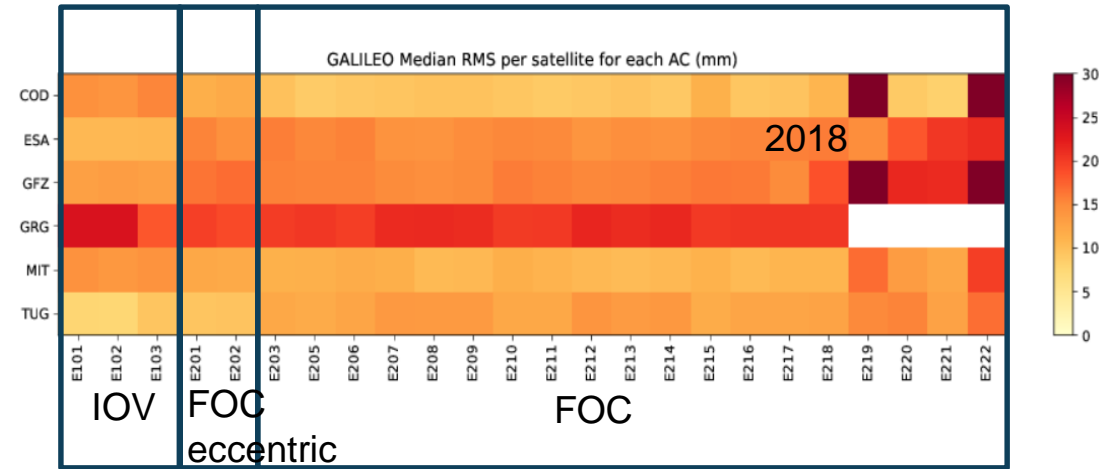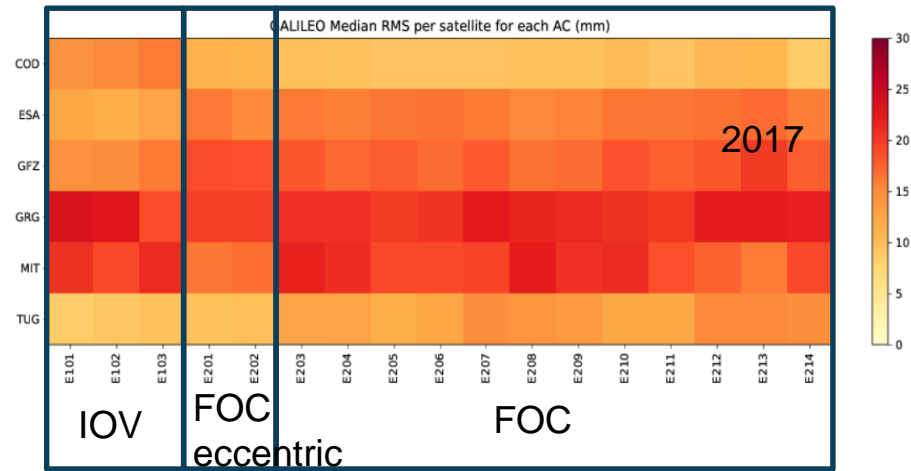

# GLONASS

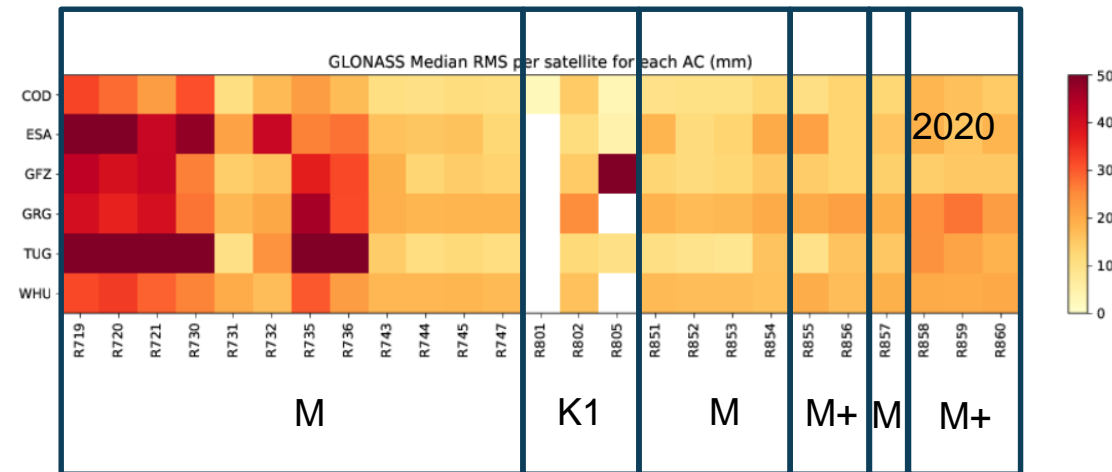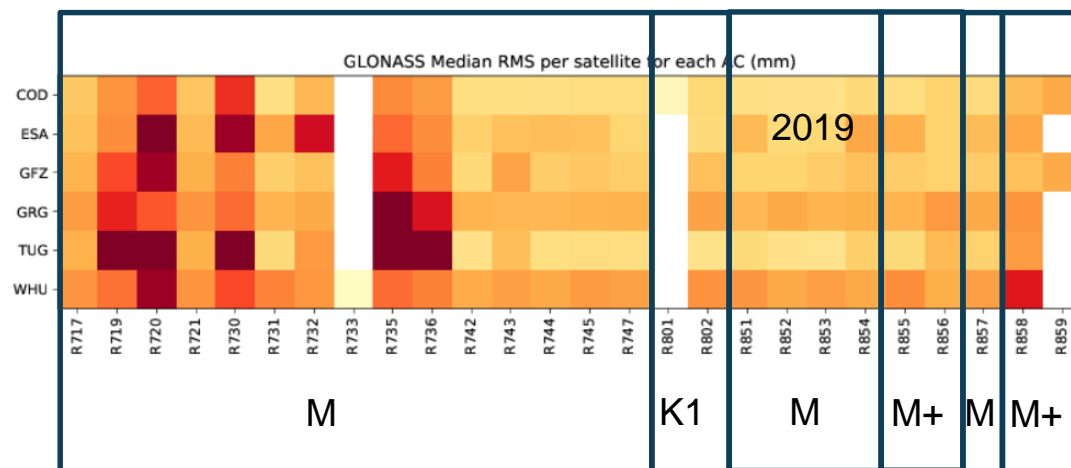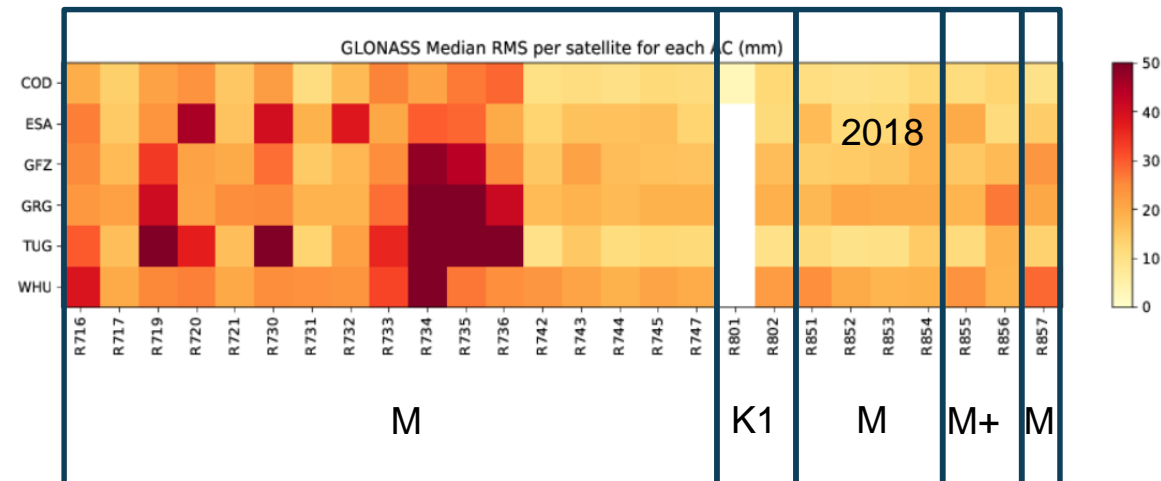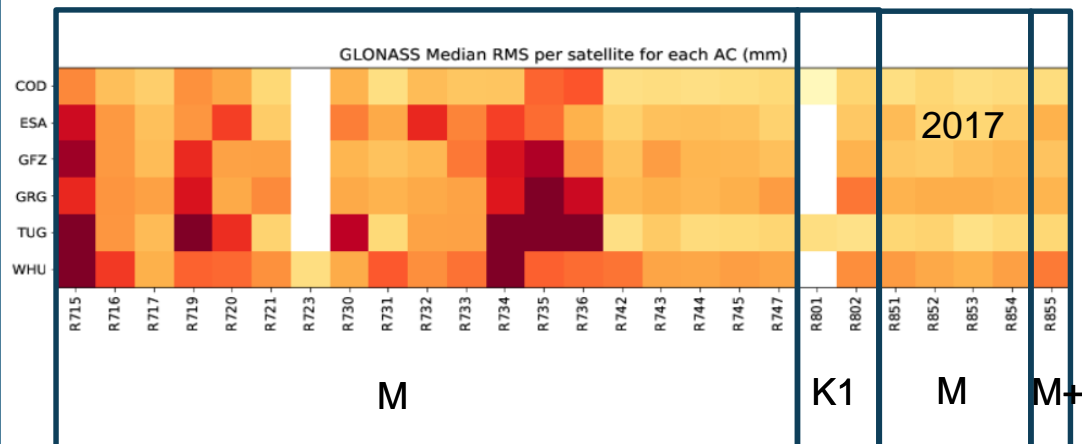


# Preliminary assessments – PPP tests at NRCan

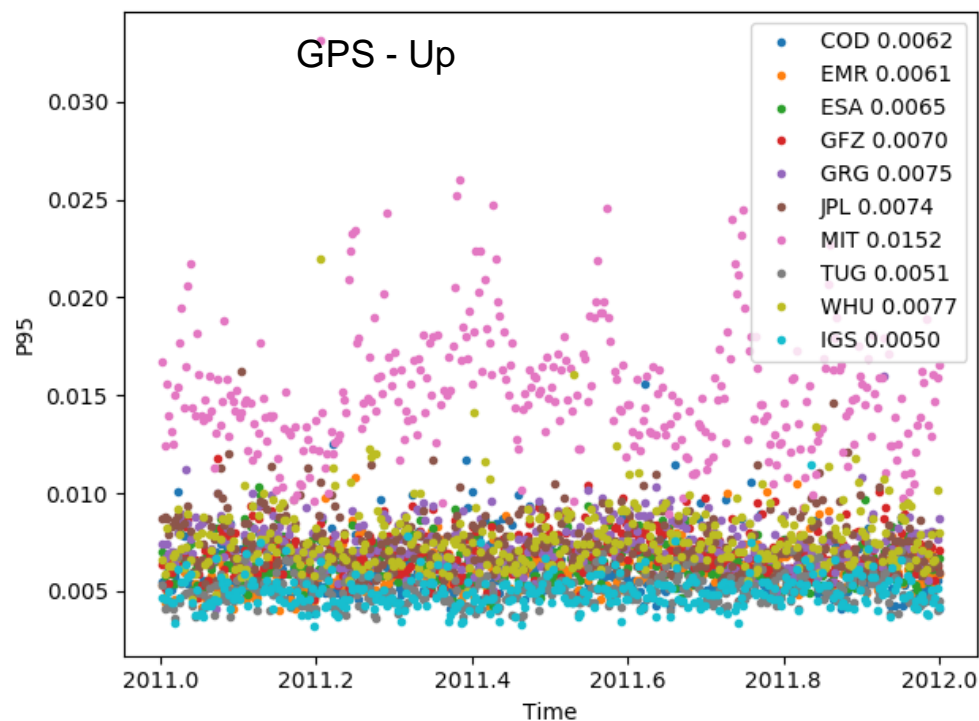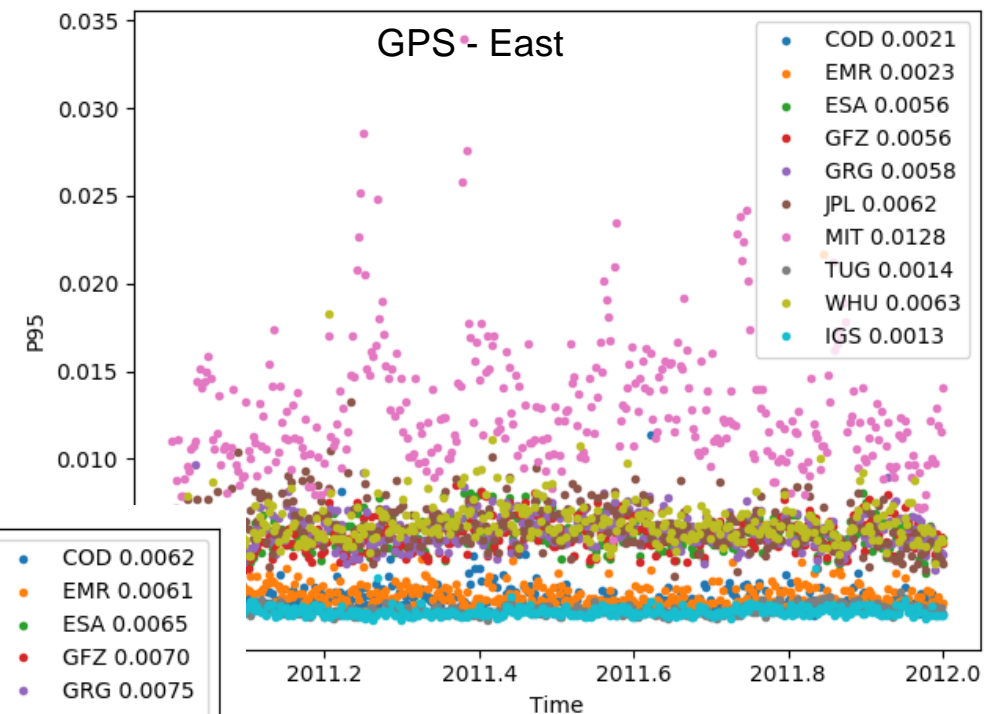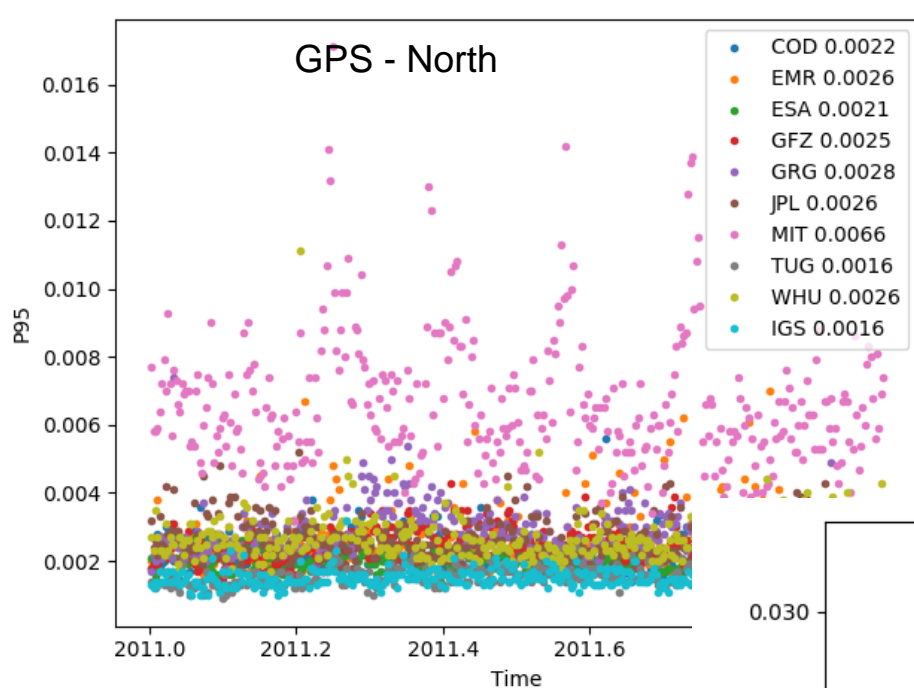

~110 stations

Residuals  
compared to  
daily combined  
SINEX;  
Provided by  
Simon Banville  
@ NRCan

# GPS - Ambiguity resolution rate

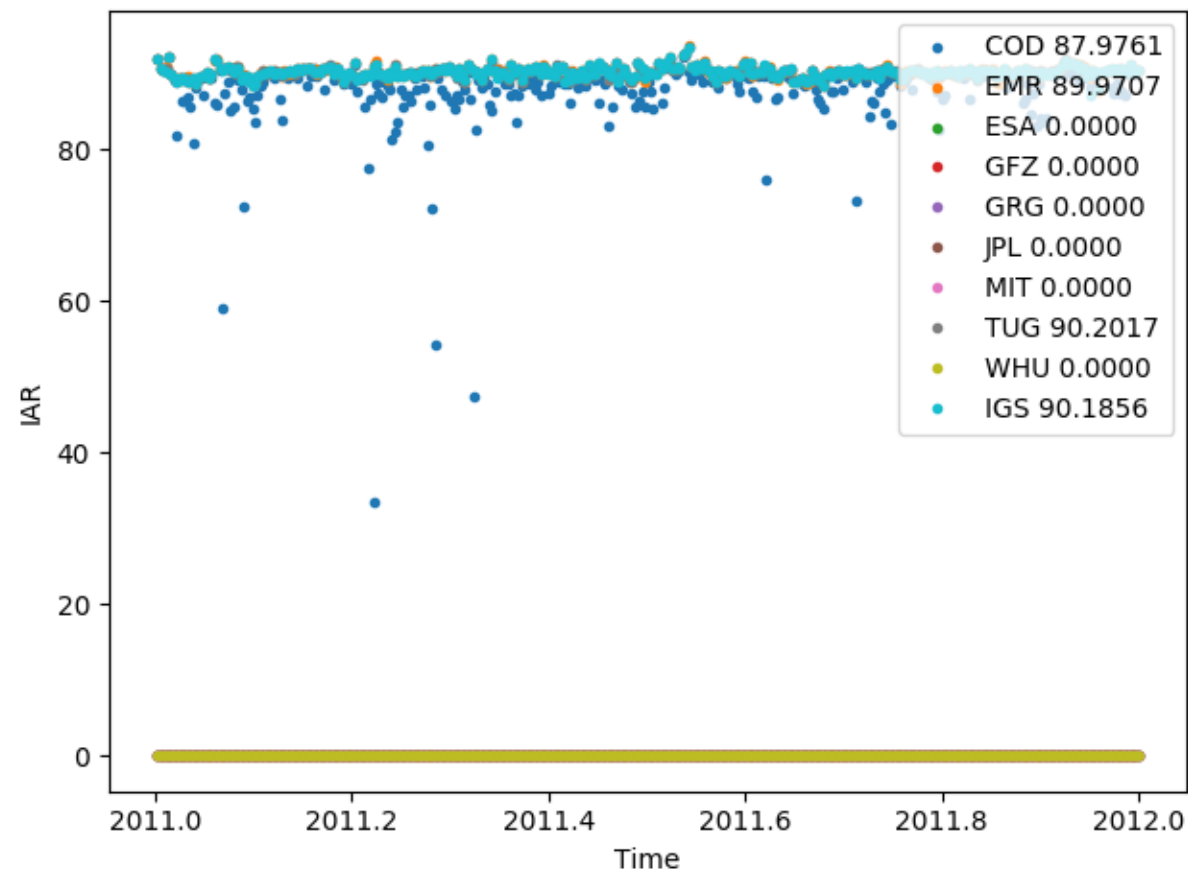

Provided by Simon  
Banville @ NRCan





## 2.4 Combining multi-GNSS satellite clocks and phase biases in the PPP-AR WG

Jianghui Geng, Qiang Wen, Zhe Yan, Zhaoyan Liu, Bingqing Li  
GNSS Center, Wuhan University




# Why combine satellite clocks/phase biases?

- IGS/GA combines ACs' orbits in Repro3
  - IGS2: Satellite-specific weighting for GPS/GLONASS/Galileo combination
- Combining satellite clocks/biases to agree with combined orbits
  - to achieve more robust clock/bias solutions

<b>AC</b>	<b>Orbits/Clocks</b>	<b>Phase biases</b>	<b>Quaternions</b>
<b>COD</b>	GRE	GE	GRE
<b>EMR / NGS</b>	G	G	G
<b>ESA</b>	G	N/A	N/A
<b>GFZ</b>	G	N/A	G
<b>GRG</b>	GRE	GE	GRE
<b>JPL</b>	G	N/A	G
<b>MIT</b>	GE	N/A	N/A
<b>TUG</b>	GRE	GRE	GRE
<b>WHU</b>	GR	N/A	GR

# New features for clock/bias combination

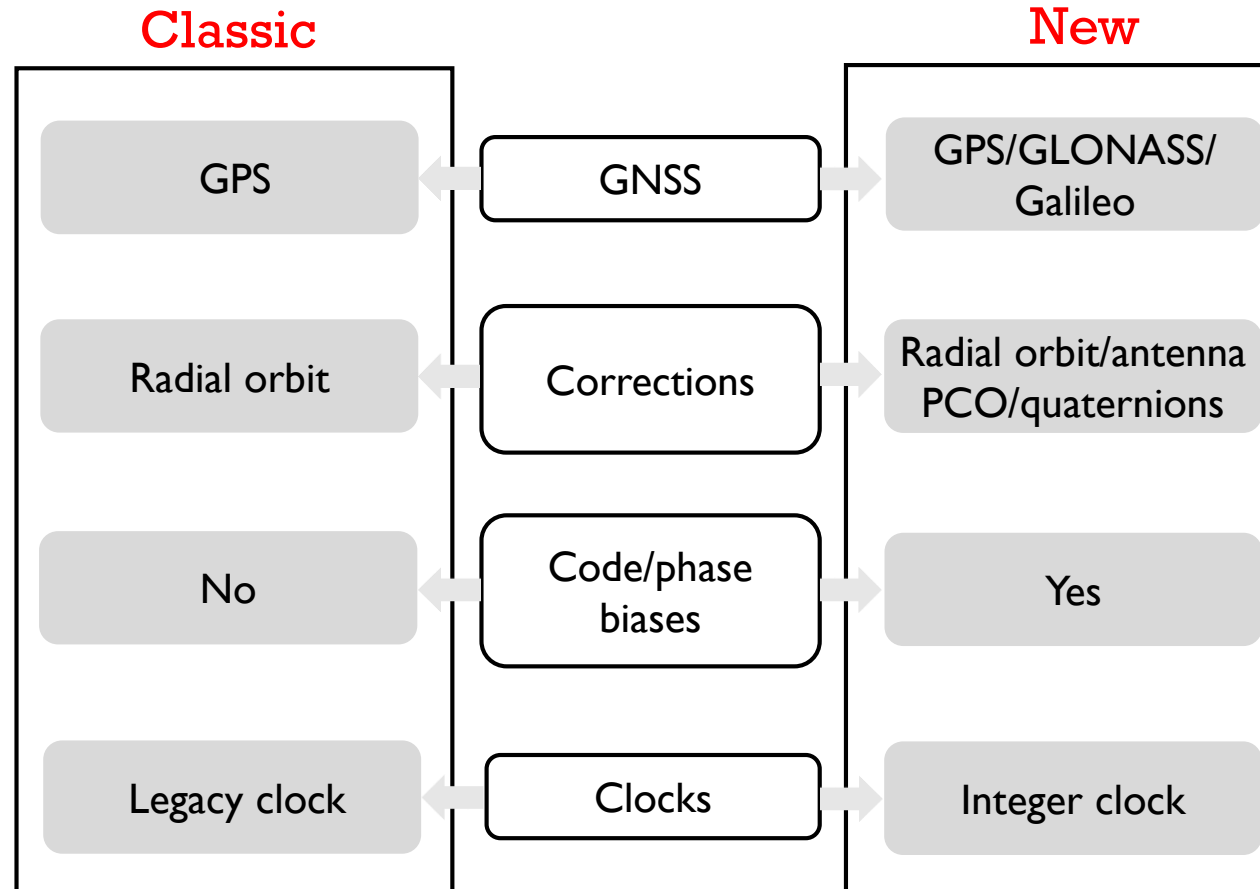

Banville et al. (2020)

# Combination theory

- Functional model of precise satellite clocks

$$\begin{cases} P_{IF,r}^s = \rho_r^s + c(dt_r - dt^s) + b_{IF,r} - b_{IF}^s + \varepsilon_{IF,P} \\ L_{IF,r}^s = \rho_r^s + c(dt_r - dt^s) + B_{IF,r} - B_{IF}^s + \lambda N_{IF,r}^s + \varepsilon_{IF,L} \end{cases}$$

- Receiver clocks are coupled with satellite clocks, a clock datum ( $\Delta D_t^{sys}$ ) is needed when computing satellite clocks
- Satellite clocks will absorb modeling errors ( $\Delta m_t^s$ ) such as orbit and attitude errors
- To enable PPP-AR, the clock and bias products ( $\Delta b^s$ ) should be considered simultaneously
- So precise satellite clocks comprise the following items

$$dt^s(t) = d\tilde{t}^s(t) + \Delta D_t^{sys} + \Delta m_t^s + \Delta b^s + \Delta \varepsilon_t^s$$

# Combination theory

- The clock datum can be obtained by averaging clock differences among common satellites

$$\Delta D^{sys}(t) = \frac{1}{nsat} \sum_k^{nsat} (dt_{AC}^{k,sys} - dt_{ref}^{k,sys})$$

- Corrections
  - Orbit corrections in radial direction

$$\Delta m_{orb}^i(t) = \frac{(\mathbf{X}_{AC}^i(t) - \mathbf{X}_{ref}^i(t)) \cdot \mathbf{X}_{AC}^i(t)}{c \cdot R^i(t)}$$

- Phase wind-up corrections caused by attitude differences (quaternions)

$$\Delta m_{att}^i(t) = \frac{\Delta \varphi^i(t)}{2\pi \cdot f_{NL}^i}$$

Loyer et al. (2021)

# Combination theory

- When combining the bias product, we should convert OSB to wide-lane and narrow-lane phase biases first


$$\begin{pmatrix} b_{WL} \\ b_{NL} \\ DCB_{P1P2} \\ D_{clk} \end{pmatrix} = \begin{pmatrix} \frac{g}{g-1} & \frac{-1}{g-1} & \frac{-g}{g+1} & \frac{-1}{g+1} \\ \alpha_{IF} & \beta_{IF} & 0 & 0 \\ 0 & 0 & 1 & -1 \\ 0 & 0 & \alpha_{IF} & \beta_{IF} \end{pmatrix} \begin{pmatrix} b_1 \\ b_2 \\ d_1 \\ d_2 \end{pmatrix} \quad \begin{cases} g = \frac{f_1}{f_2} \\ \alpha_{IF} = \frac{f_1^2}{f_1^2 - f_2^2} \\ \beta_{IF} = \frac{-f_2^2}{f_1^2 - f_2^2} \end{cases}$$

- Then align DCBs and wide-lane phase biases, after which the narrow-lane phase biases are combined with satellite clocks (satellite antenna PCOs should be corrected)

$$\begin{cases} d_{C1W,A}^j - d_{C2W,A}^j = DCB_{CMB}^j + \Delta t_{C1W,C2W} + \Delta d_{PCO} \\ \alpha_{WL} b_{L1,A}^j + \beta_{WL} b_{L2,A}^j - \alpha_{NL} b_{C1W,A}^j - \beta_{NL} b_{C2W,A}^j \\ \quad = UPD_{WL,CMB}^j + \Delta t_{WL} + \lambda_{WL} N_{WL,A}^j + \Delta upd_{PCO} \\ dt_A^j - \alpha_{IF} b_{L1,A}^j - \beta_{IF} b_{L2,A}^j + \beta_{IF} \lambda_2 N_{WL,A}^j = dt_{CMB}^j - \Delta t + \lambda_{NL} N_{L1,A}^j \end{cases}$$



# Combination procedure

- Reference attitude quaternions
  - Produced by TUG
- Clock combination
  - Code biases combined as well
  - Both legacy & integer clocks are combined without any discrimination
  - AC specific weighting

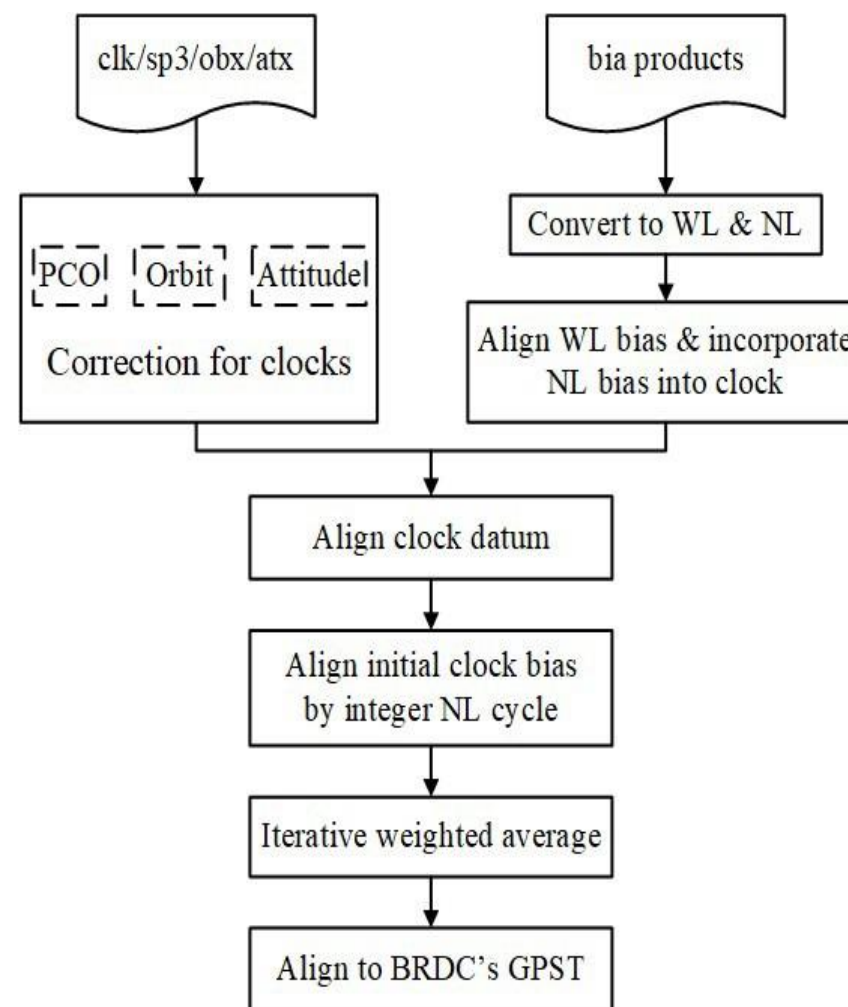

# Impact of satellite attitude discrepancy

- Quaternions can diminish inter-AC clock discrepancies in eclipsing seasons

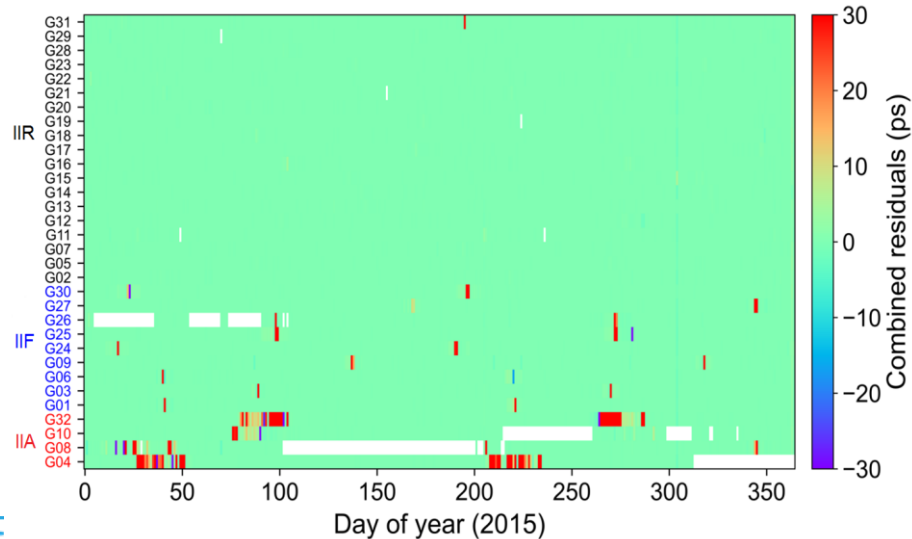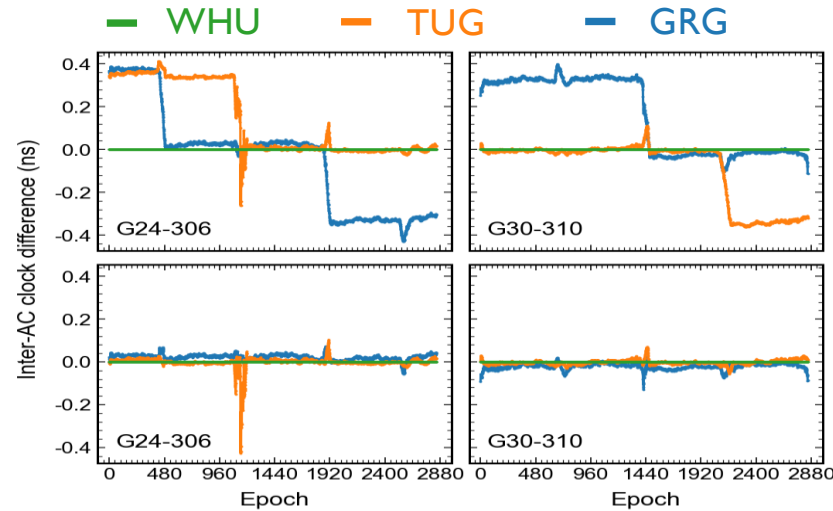

Difference between the clock consistency with/out attitude corrections  
BLOCK IIA and IIF suffer more




# PCOs on code and phase biases

- Satellite & receiver antenna PCOs are usually uncorrected in the geometry-free or Melbourne-Wübbena combination
  - Usually GPS satellites have identical L1/L2 PCOs from IGS ANTEX files
  - But Block IIIA satellites have different PCOs among L1/L2 frequencies
  - Galileo have differing PCOs across frequencies
- DCBs and wide-lane phase biases differ among AC products

			tug	emr	gbm				cod	esa	gbm	grg	tug
18	G18	DCB	3.316	1.807	2.562	58	G18	WL	0.019	0.052	0.050	0.012	0.226
19	G19	DCB	6.251	6.419	6.335	59	G19	WL	0.127	0.125	0.124	0.122	0.104
20	G20	DCB	1.677	1.929	1.803	60	G20	WL	-0.429	-0.415	-0.416	-0.442	-0.463
21	G21	DCB	2.486	2.831	2.659	61	G21	WL	-0.123	-0.130	-0.129	-0.145	-0.136
22	G22	DCB	7.648	8.080	7.864	62	G22	WL	-0.086	-0.075	-0.075	-0.108	-0.127
23	G23	DCB	3.281	1.874	2.578	63	G23	WL	0.219	0.245	0.245	0.204	0.425

# GPS/Galileo combined phase biases


- GPS/Galileo PPP ambiguity fixing rates (day 300-330, 2020)

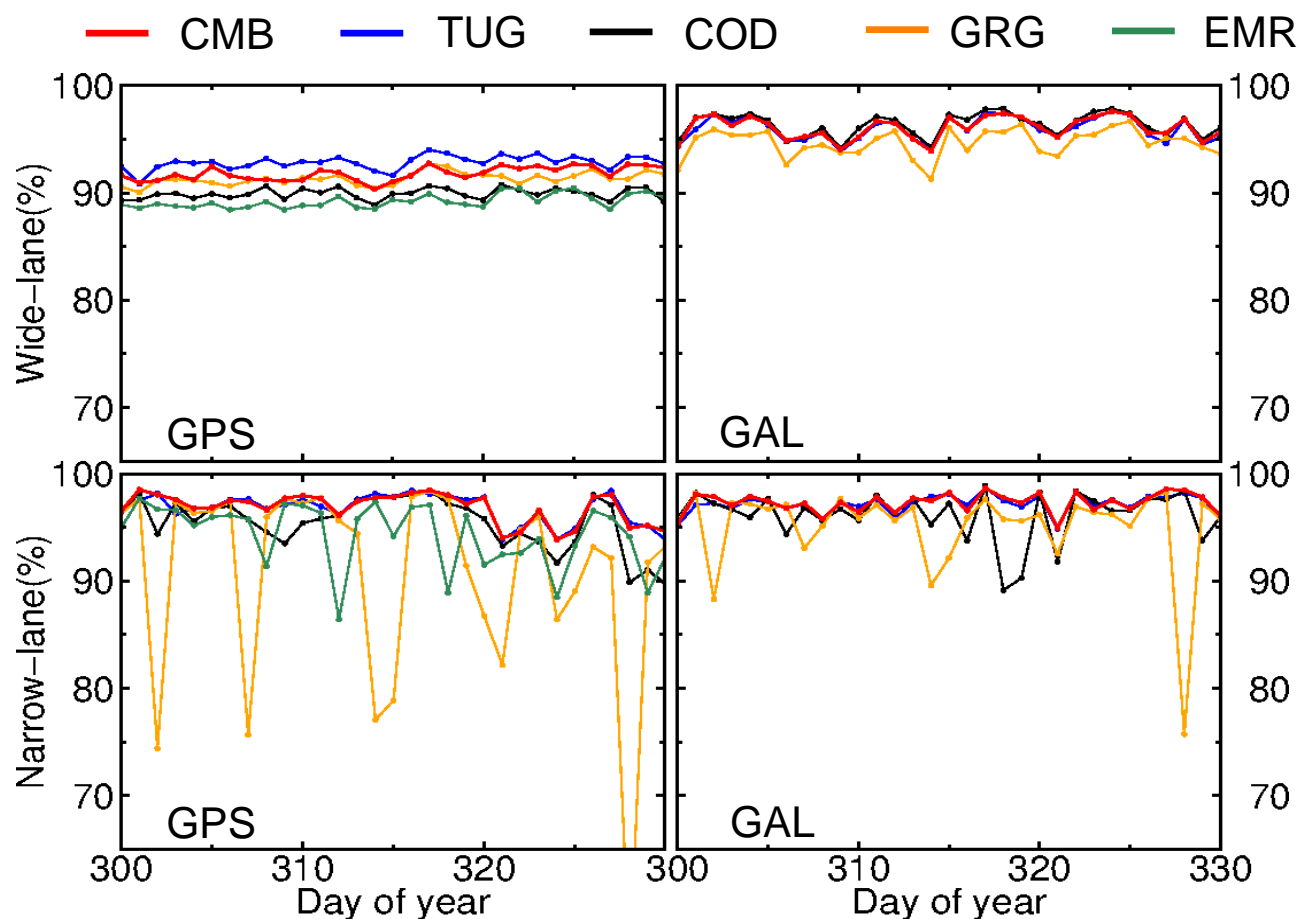


**CMB** products rank the top roughly in terms of ambiguity fixing rates

# GPS/Galileo combined phase biases

- Daily position repeatabilities (mm) after PPP-AR (day 300-330, 2020)

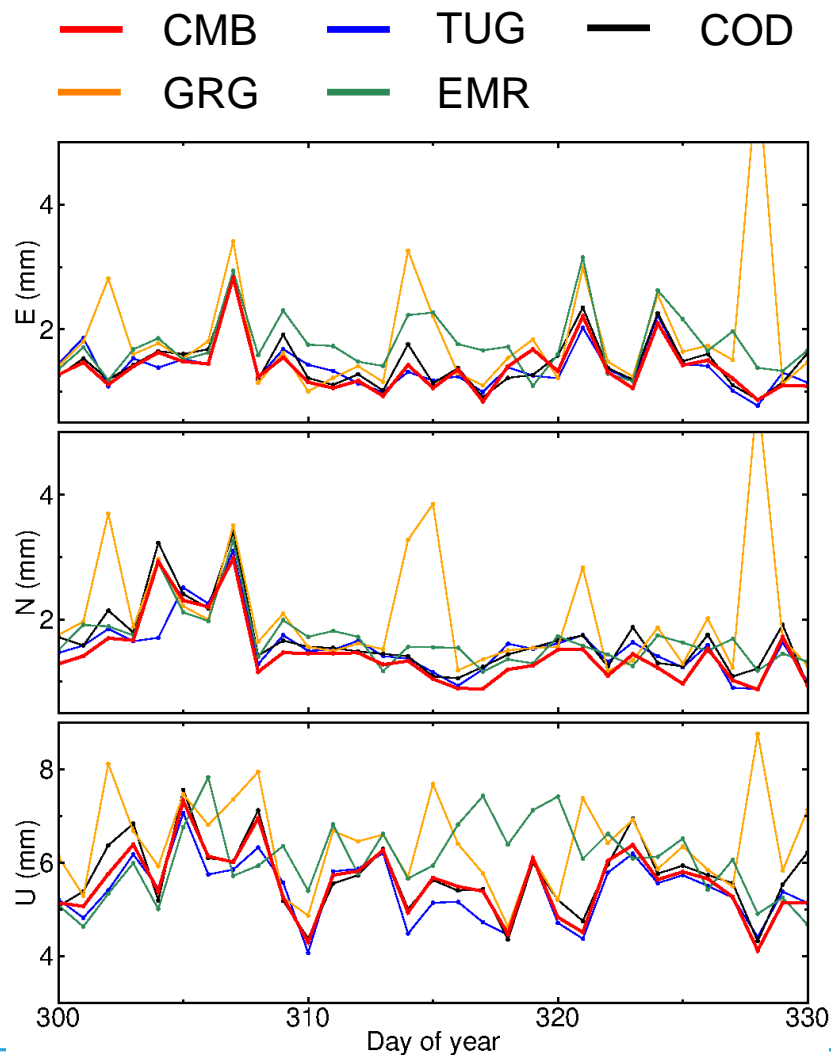

AC	Mean (mm)		
	E	N	U
COD	1.5	1.7	5.7
EMR	1.8	1.7	6.1
GRG	1.9	2.1	6.4
TUG	1.4	1.5	5.5
CMB	1.4	1.6	5.5

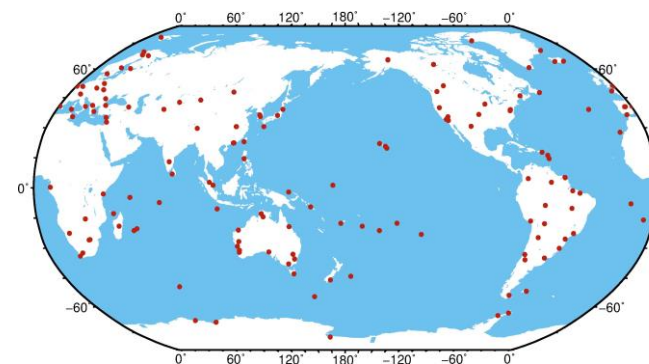

# Summary

---

- The new clock combination differs from the classic one by incorporating multi-GNSS phase biases and satellite attitude quaternions to achieve integer clocks
- Satellite antenna PCOs should be corrected on code and phase biases to improve consistency among ACs especially for GPS BLOCK IIIA and Galileo satellites
- Combination improves the robustness of satellite products with the highest possible ambiguity fixing rates and positioning precisions among all AC specific products


# 2.5 iGMAS orbit and clock combination

Guo Chen, Wuhan University



## iGMAS

- The international GNSS Monitoring and Assessment System (iGMAS) was proposed in 2007 to assess the performance of multi-GNSS broadcast ephemerides and provide precise products for global users.
- iGMAS consists of 30 global tracking stations, 3 data centers (DC), 12 analysis centers (AC), 1 information combination and service center (ISC), 1 monitoring and assessment center (MAC), and 1 operation control & management center(OCMC).

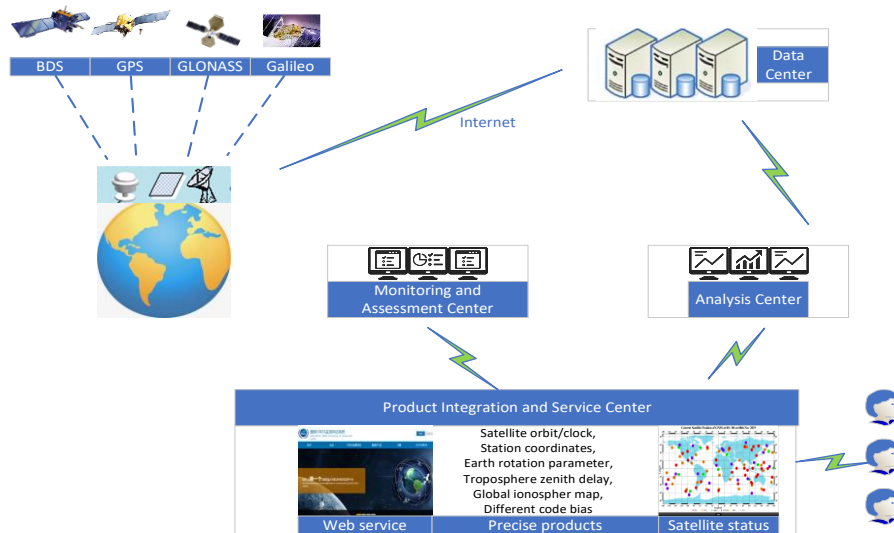


## iGMAS

- The ISC is the center of iGMAS products reprocessing, which evaluates the quality of GNSS products submitted by analysis centers, and then reprocesses them to generate combined products.
- Robust precise combined orbit and clock solutions are conducted by iGMAS to assess the broadcast ephemerides of BDS and other GNSSs.

AC	Description
BAC	Beijing Aerospace Control Center
CGS	Chinese Academy of Surveying and mapping
CHD	Chang'an University
CUM	China University of Mining and Technology
IGG	Institute of Geodesy and Geophysics
LSN	Information Engineering University
NTS	National Time Service Center
SHA	Shanghai Astronomical Observatory
TJU	Tongji University
WHU	Wuhan University
XRS	Xi'an Research Institute of Surveying and Mapping
XSC	Xi'an Satellite Control Center

Product	Time delay	Updates interval
Ultra-rapid :SP3, CLK, ERP, TRO	Real-time (pre)	6 hour
	3 hour (obs)	6 hour
Rapid :SP3, CLK, ERP, IONO	17 hours	1 day
	1 day	1 day (IONO)
Final: SP3, CLK, ERP, SNX, IONO, TRO, DCB	12 days	1 day
	20 hours	1 month (DCB)



## Final orbit/clock/ERP submitted by ACs

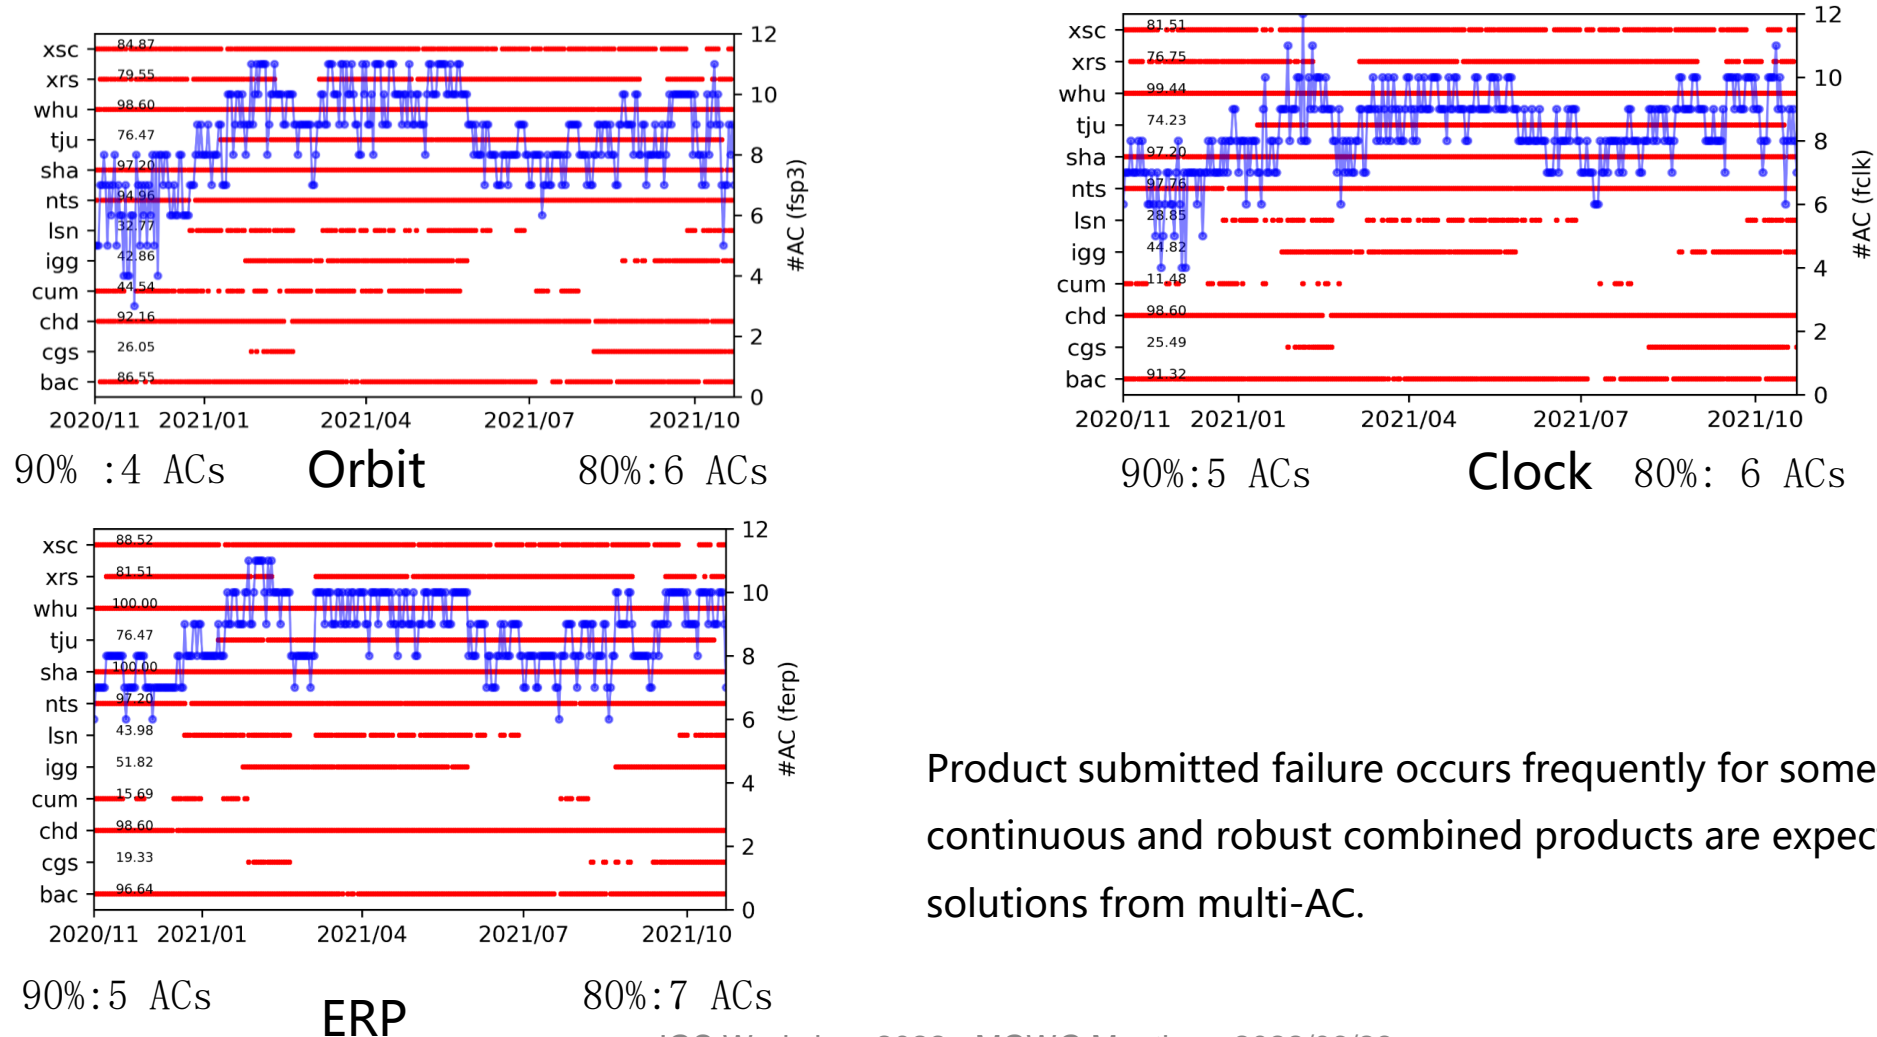

Product submitted failure occurs frequently for some ACs, and continuous and robust combined products are expected using solutions from multi-AC.



## iGMAS orbit and clock combination

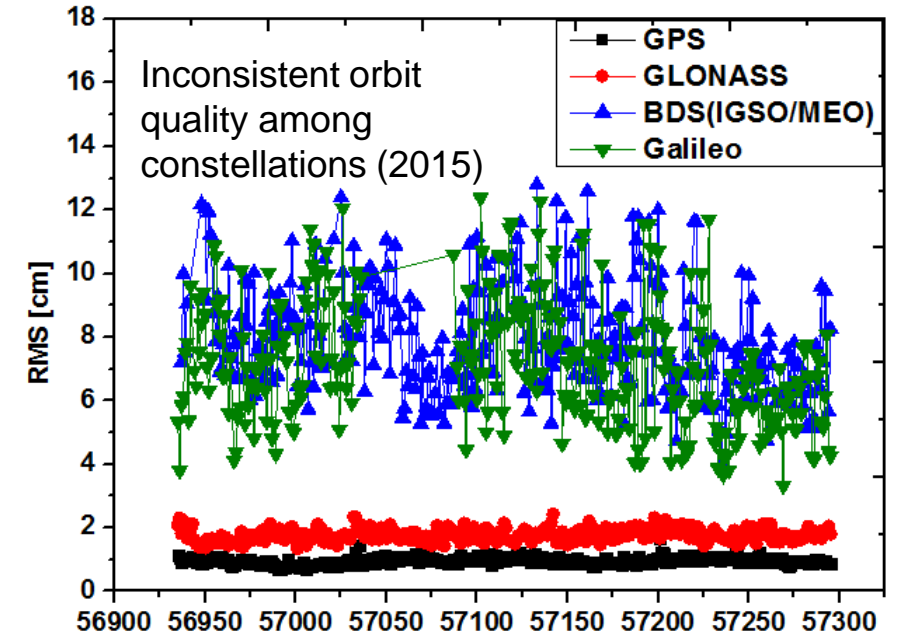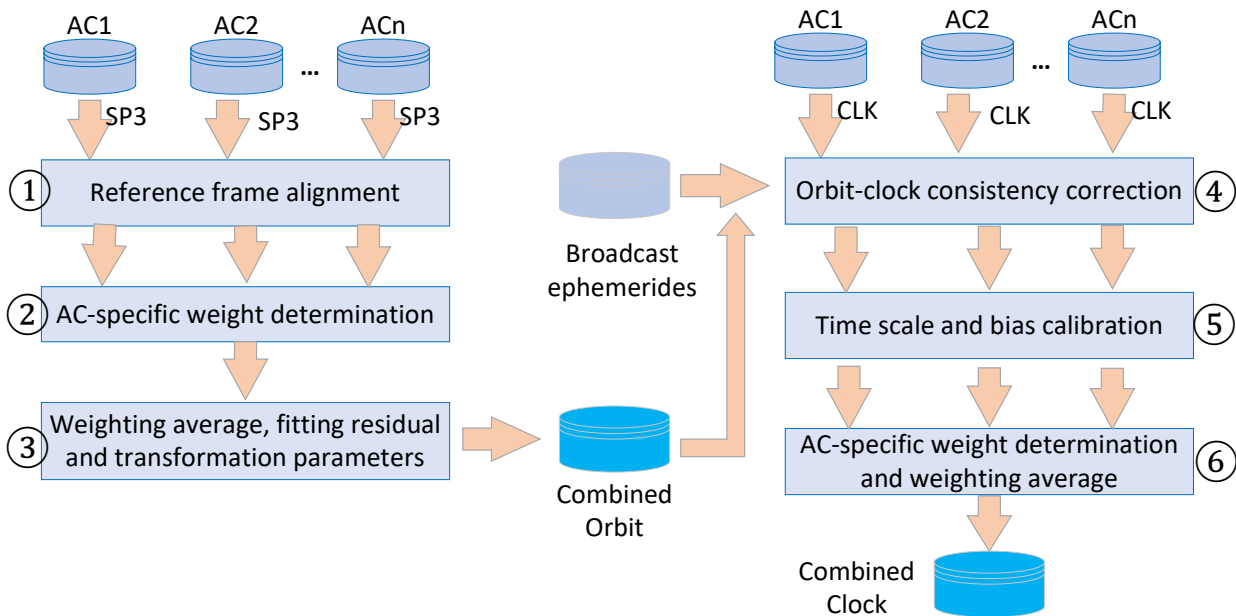

Step 1

$$\begin{cases} dO_{X,AC}^{isat} = -dX_p O_{Z,AC}^{isat} \\ dO_{Y,AC}^{isat} = dY_p O_{Z,AC}^{isat} \\ dO_{Z,AC}^{isat} = dX_p O_{X,AC}^{isat} - dY_p O_{Y,AC}^{isat} \end{cases}$$

$$O_{AC}^{sys} + v_{AC}^{sys} = O_{cmb}^{sys} + D_{AC}^{sys} + S_{AC}^{sys} + R_{AC} O_{cmb}^{sys}$$

Step 2



$$RMS_{AC}^{sys} = \sqrt{\frac{(v_{AC,cor}^{sys})^T P_{AC}^{sys,Last} v_{AC,cor}^{sys}}{3 \cdot np_{AC}^{sys} - 7}} \quad P_{AC}^{sys} = \frac{1/RMS_{AC}^{sys}}{\sum_{i=1}^{nac} 1/RMS_i^{sys}}$$

$$P_{AC}^{sys,isat} = \begin{cases} 1, & RMS_{AC}^{sys,isat} < k_1 \cdot RMS_{AC}^{sys,med} \\ \bar{P}_{AC}^{sys,isat}, & k_1 \cdot RMS_{AC}^{sys,med} \leq RMS_{AC}^{sys,isat} < k_2 \cdot RMS_{AC}^{sys,med} \\ 0, & RMS_{AC}^{sys,isat} \geq k_2 \cdot RMS_{AC}^{sys,med} \end{cases}$$

Step 3

$$O_{cmb}^{sys,isat} = \frac{\sum_{i=1}^{nac} P_i^{sys} \{O_{AC,cor}^{sys,isat} - (D_i^{sys} + S_i^{sys} + R_i O_{cor}^{sys,isat})\}}{\sum_{i=1}^{nac} P_i^{sys}}$$

## iGMAS orbit and clock combination

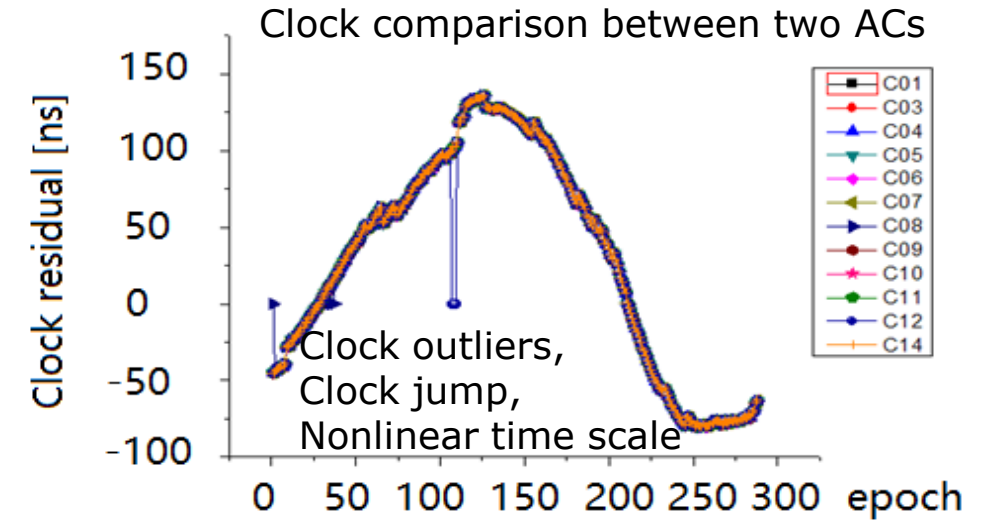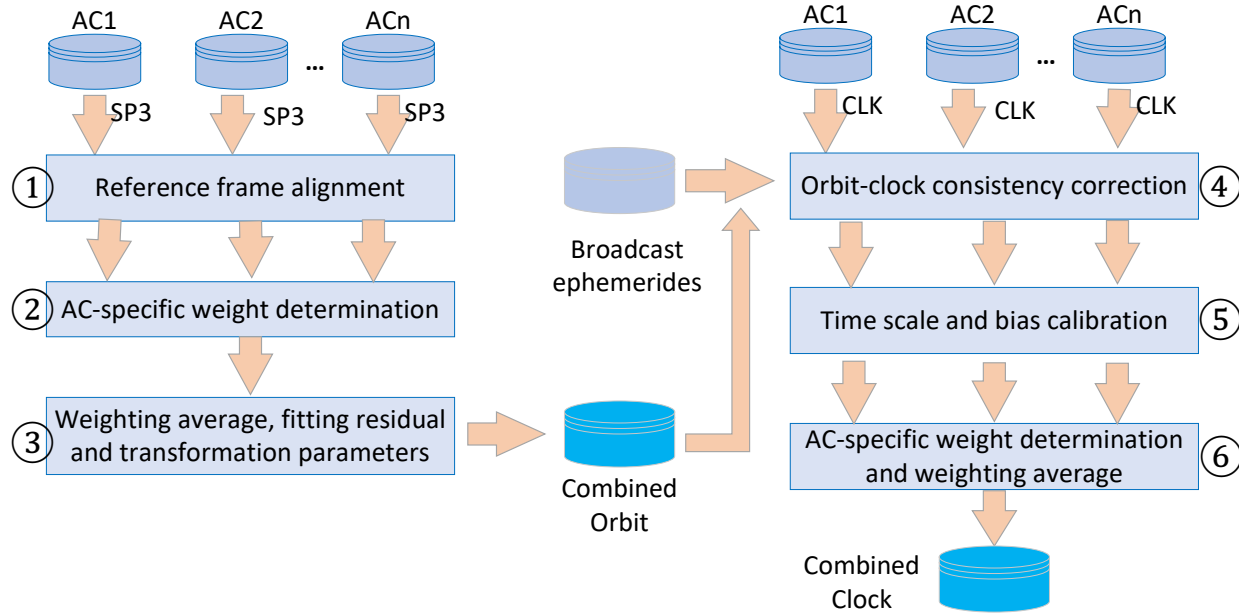

Step 4

$$dC_{AC}^{sys, isat} = e \cdot (O_{AC}^{sys, isat} - O_{cmb}^{sys, isat})$$

$$e = \begin{bmatrix} e_X \\ e_Y \\ e_Z \end{bmatrix}, e_X = \frac{O_{X, cmb}^{sys, isat}}{\rho_0}, e_Y = \frac{O_{Y, cmb}^{sys, isat}}{\rho_0}, e_Z = \frac{O_{Z, cmb}^{sys, isat}}{\rho_0}$$

Step 5

$$C_{brd, t_k}^{sys} = C_{AC, t_k}^{sys} + a_{o, AC}^{sys} + a_{1, AC}^{sys} \Delta t_k$$

$$C_{ref, t_k}^{sys, isat} = C_{AC, t_k}^{sys, isat} + a_{o, AC}^{sys, isat} + a_{1, AC}^{sys, isat} \Delta t_k$$

$$C_{comb, t_k}^{sys} = C_{AC, t_k}^{sys} + a_{o, AC}^{sys} + a_{1, AC}^{sys} \Delta t_k$$



$$p_{i, k}^j = \begin{cases} 1, & |v_{i, k}^j| < k_0 \sigma_{i, 0} \sqrt{q_{i, k}^j} \\ \frac{k_0}{|v_{i, k}^j|} \left( \frac{k_1 \sigma_{i, 0} \sqrt{q_{i, k}^j} - |v_{i, k}^j|}{k_1 - k_0} \right), & k_0 \sigma_{i, 0} \sqrt{q_{i, k}^j} \leq |v_{i, k}^j| < k_1 \sigma_{i, 0} \sqrt{q_{i, k}^j} \\ 0, & |v_{i, k}^j| > k_1 \sigma_{i, 0} \sqrt{q_{i, k}^j} \end{cases}$$

Step 6



$$w_i = \frac{1}{(C_{i, RMS}^{sys})^2}$$

$$C_{cmb, k}^j = \frac{\sum_{i=1}^{nac} w_i \bar{C}_{i, k}^j}{\sum_{i=1}^{nac} w_i}$$



# iGMAS orbit

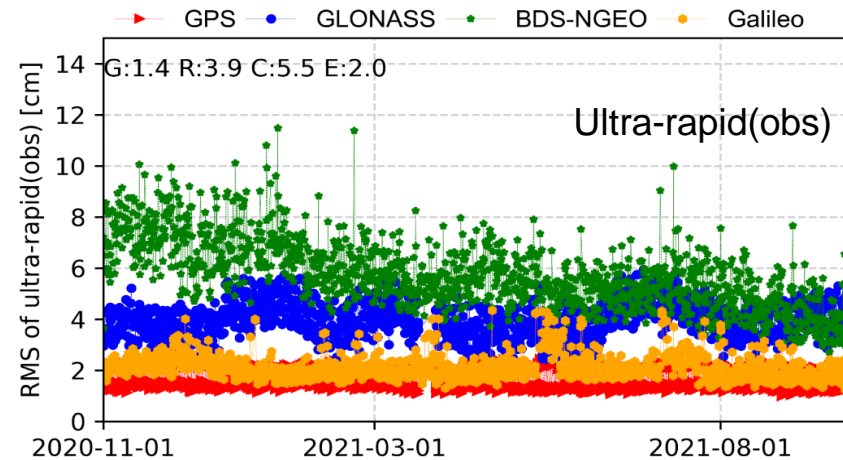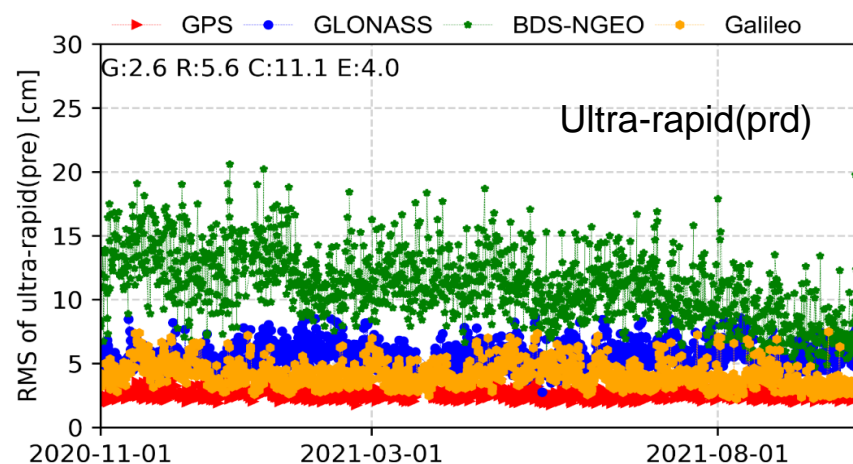



The GPS and GLONASS orbits are compared to the IGS combination, the BDS and Galileo orbits are compared to the products of GFZ.

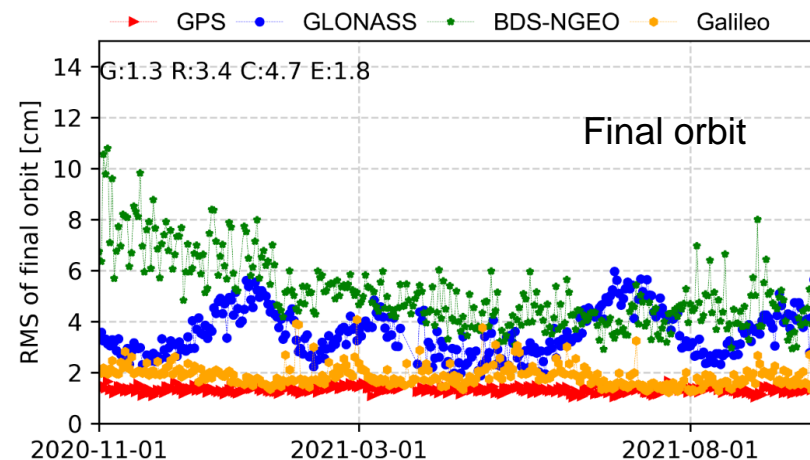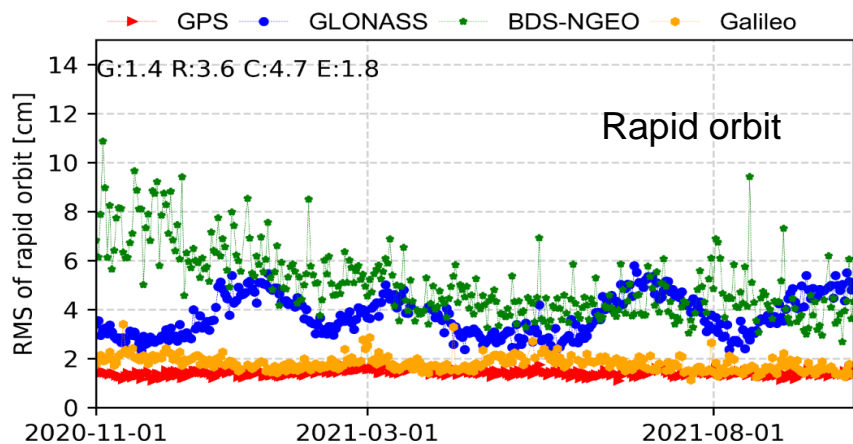




## iGMAS clock

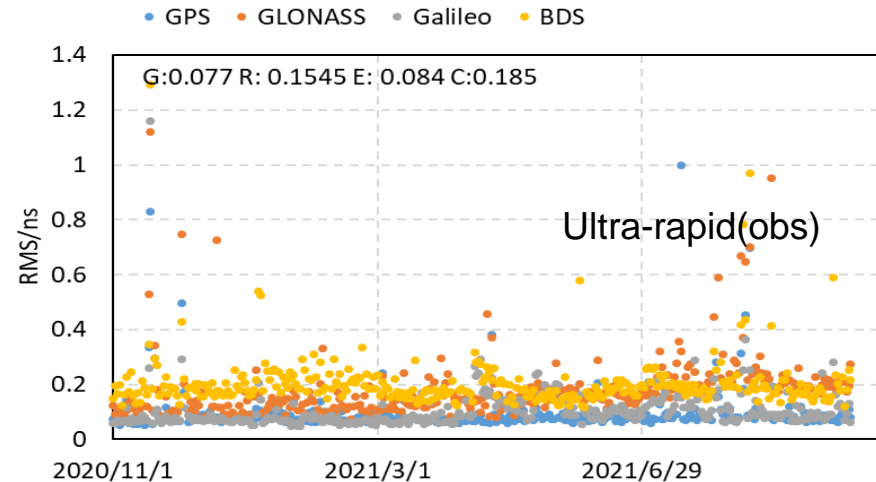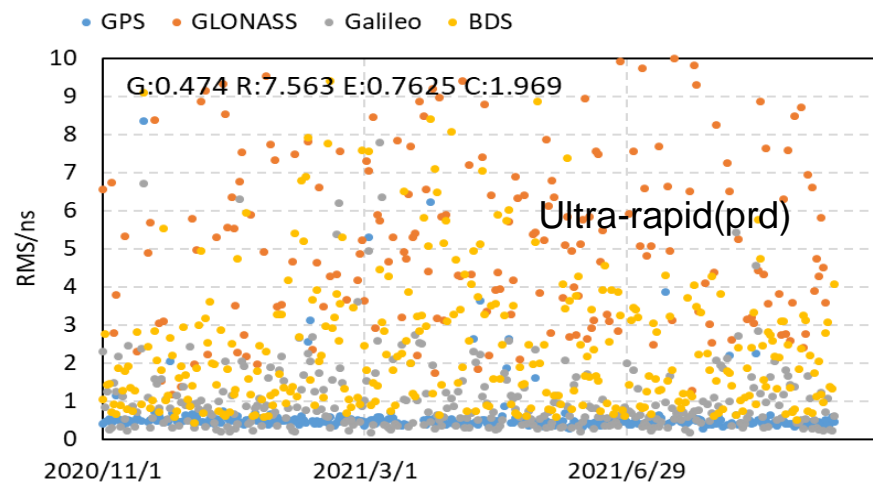




GPS : ISC .VS. IGS  
GLONASS : ISC .VS. GFZ  
BDS : ISC .VS. GFZ  
Galileo : ISC .VS. GFZ

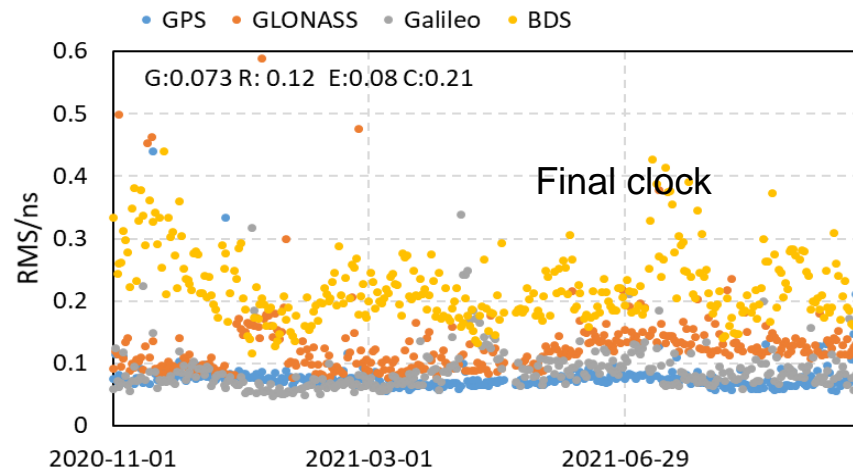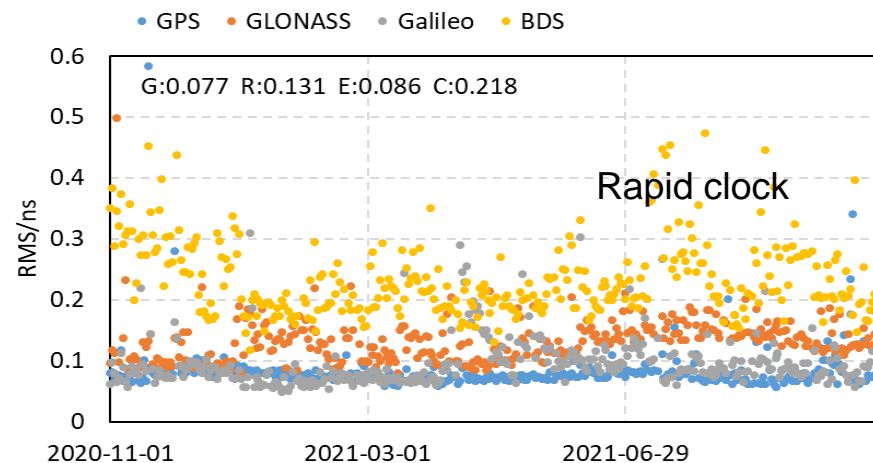

## SLR validation of final orbit

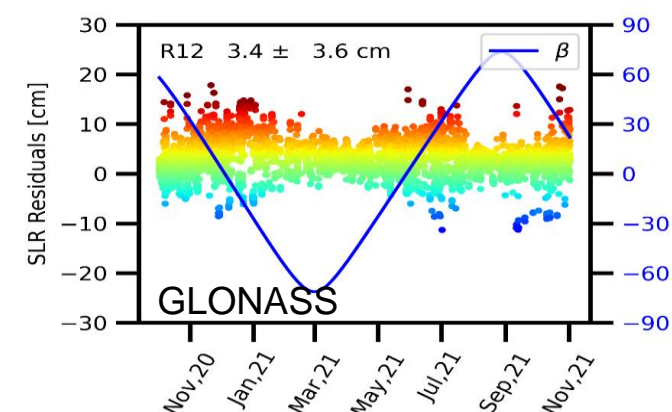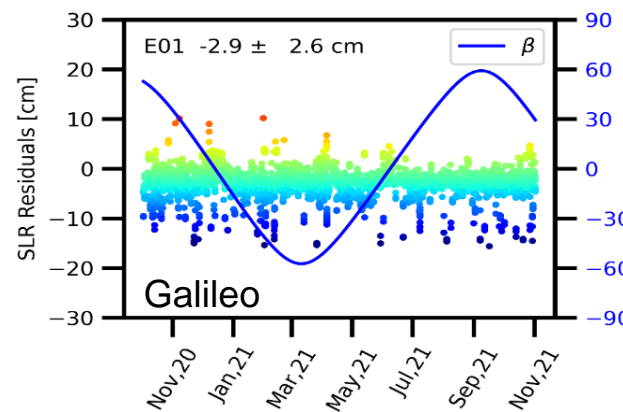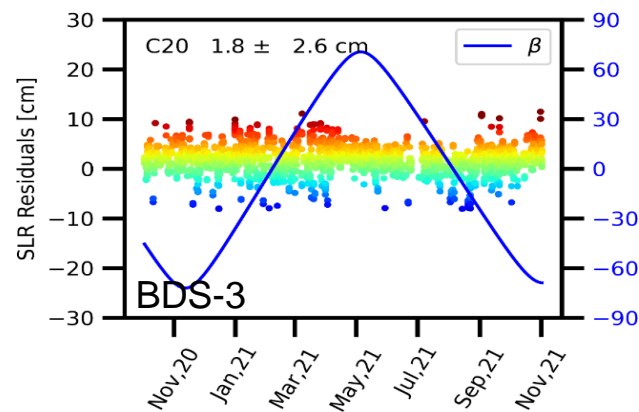


- Overall, the standard deviations of BDS-3 MEO and Galileo satellites are at the same level (i.e, 3.0 cm), smaller than the values of GLONASS (i.e. 4-6 cm).
- The statistics of SLR residuals show consistent bias of -3 cm for Galileo satellites.

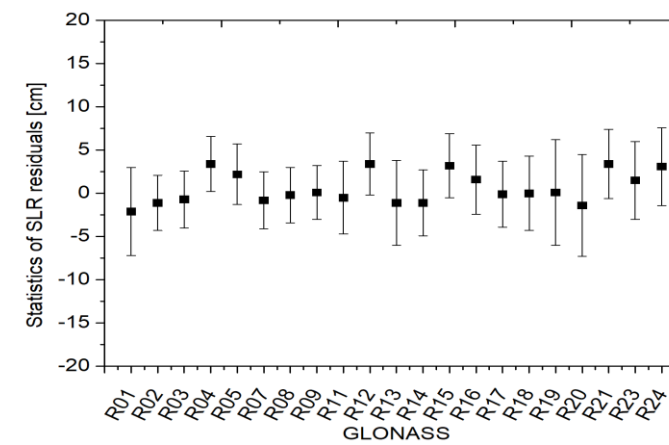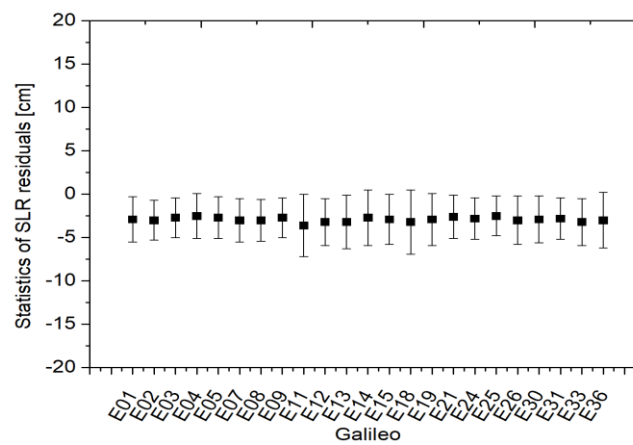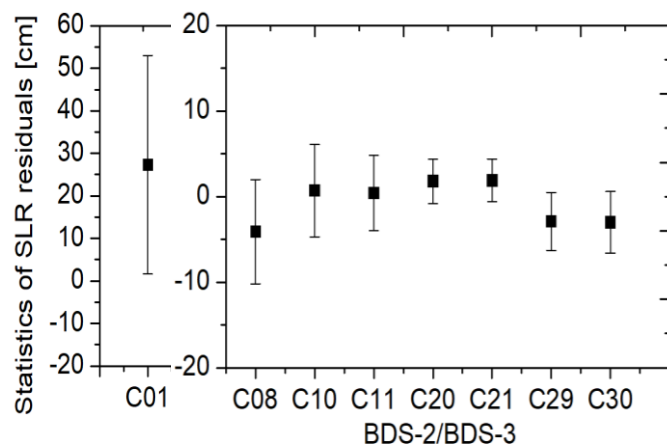




## SLR validation of final orbit

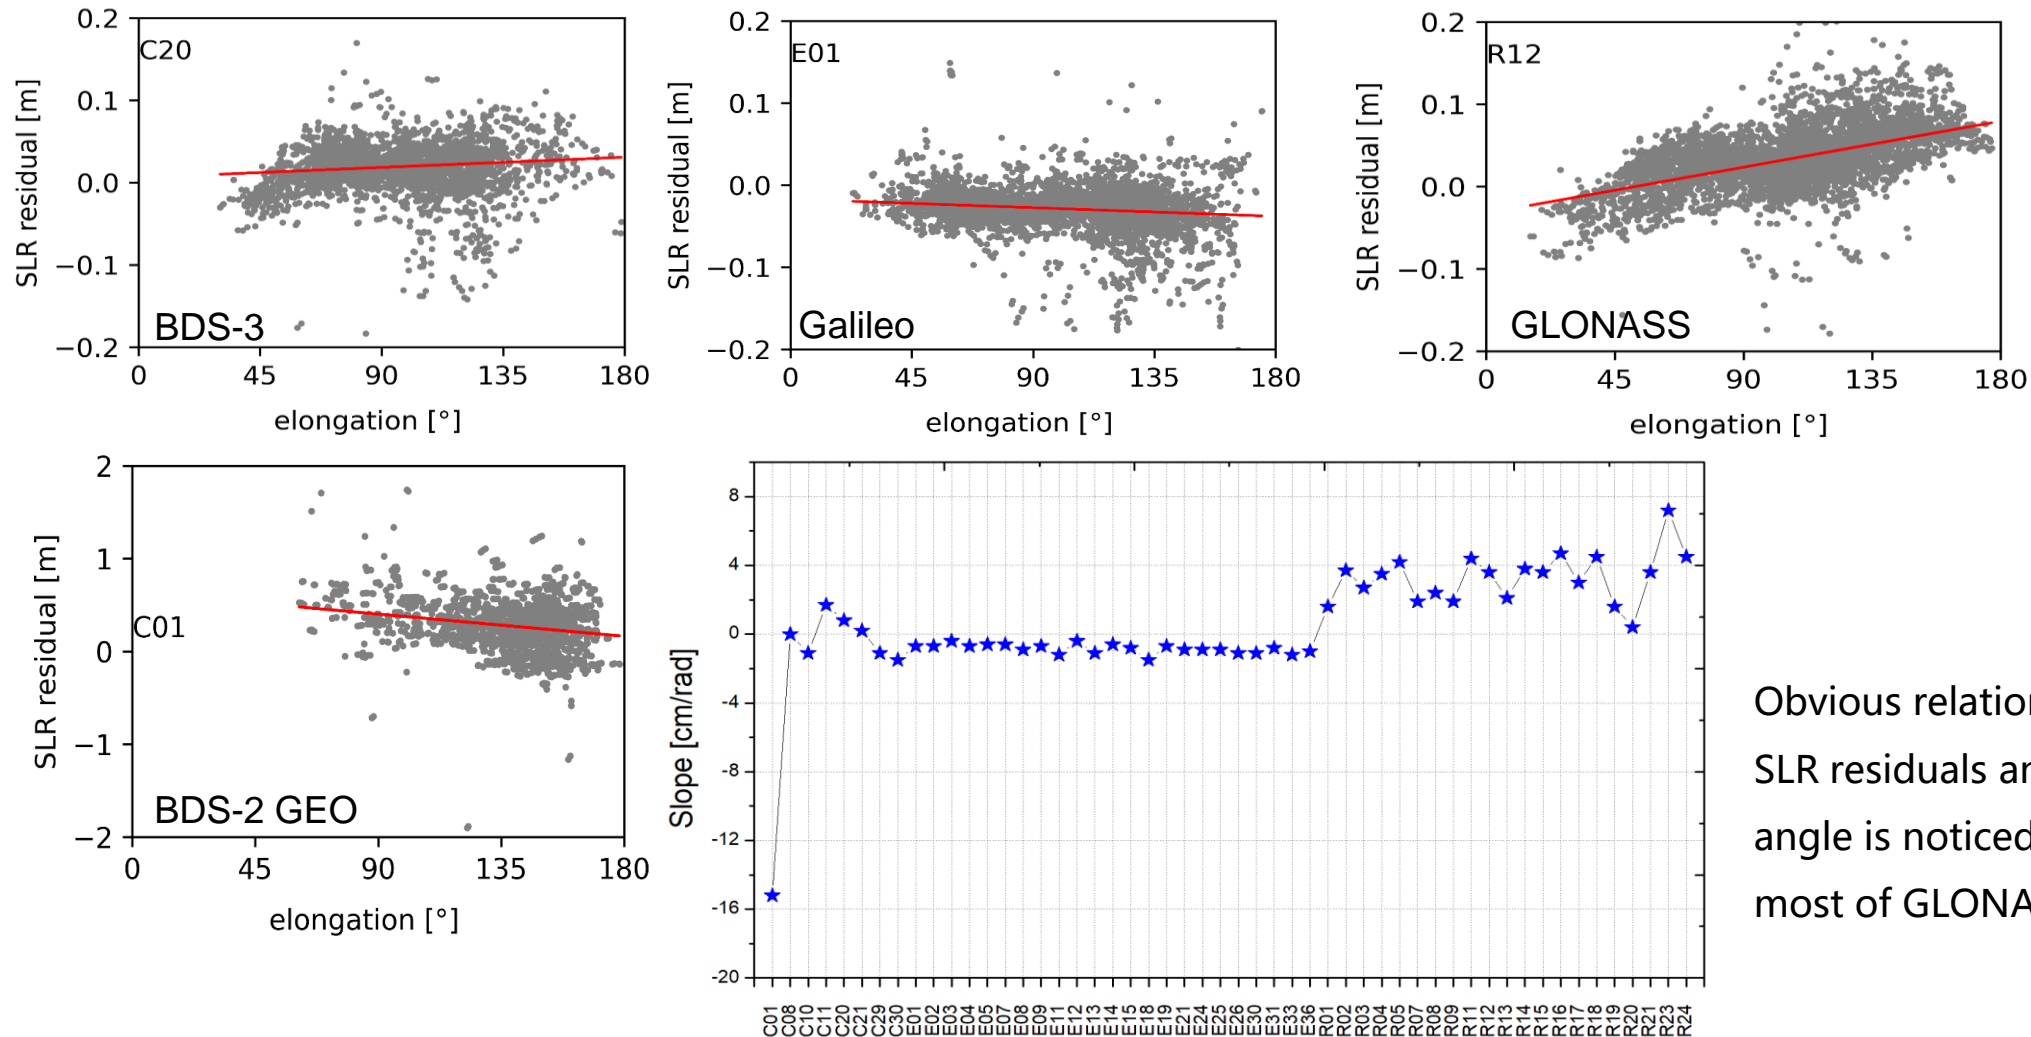

Obvious relationship between SLR residuals and elongation angle is noticed for C01 and most of GLONASS satellites

## PPP validation of final orbit and clock

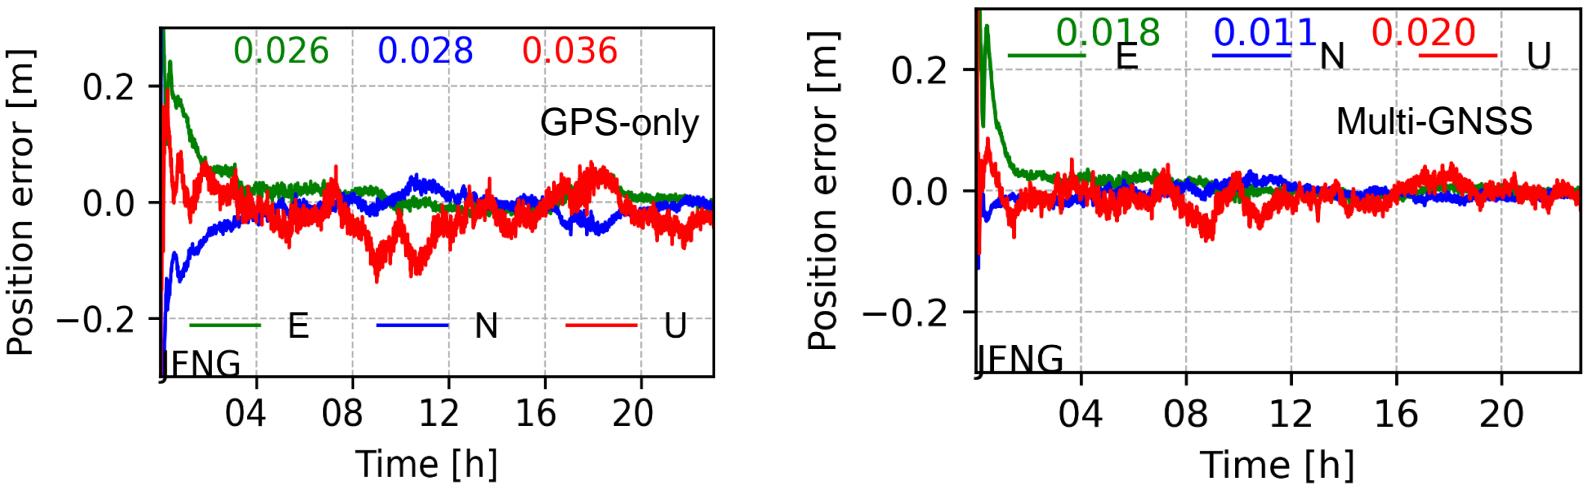

SITE	GPS			GPS+GLONASS+BDS+Galileo		
	E	N	U	E	N	U
ABPO	4.4	1.6	4.4	1	0.6	2.6
BRST	4.6	3.5	8.3	1.4	1.4	3
CHPI	2.8	1.3	4.6	1.1	0.7	2.9
CUTO	2.8	2.1	4.5	1.7	1.3	2.2
JFNG	2.6	2.8	3.6	1.8	1.1	2
KOKB	1.4	1.1	4.3	0.9	0.7	3.1
SAVO	4.9	3.5	7.1	2.7	3	5.6
UNB3	1.7	1.6	2.2	0.8	0.8	1.6
Average	3.2	2.2	4.9	1.4	1.2	2.9

Compared to the GPS-only result, the accuracy of 1.4 (E), 1.2 (N) and 2.9 cm (U) for quad-constellation integrated PPP, and an improvement of 57 (E), 45 (N) and 41% (U) is achieved, which also indicates the consistency level of multi-GNSS combined orbit/clock.

## Summary

- The GPS combined orbits and clocks achieve the best consistency with IGS solutions, followed by Galileo, GLONASS and BDS are comparable. The consistency of BDS is getting better, and it can reach 3-4 cm at the end of 2021.
- The consistency between combined orbit and clock is also evaluated by kinematic PPP, and the positioning accuracy of 1.4 (East), 1.2 (North) and 2.9 cm (Up) is obtained for the quad-constellation integrated PPP.
- In the future, further work should be done :
  - More robust combination strategy are expected when products submitted by not sufficient ACs (e.g. 2-4 ACs).
  - Improved solar radiation pressure, earth albedo, antenna thrust model, should be considered during the POD of ACs.



## 2.6 Discussion

All



## MGEX Product Combination Needs

- Understand quality and possible deficits of current multi-GNSS products
  - Systematic comparison and assessment
- Understand/consolidate IGS multi-GNSS product combination requirements
  - Required harmonization of products (e.g. models, single- vs multi-step, orbit/clock rates, EOPs)
  - Preferred concept for multi-GNSS orbit combination (constellations and satellites, EOP alignment, common vs single-constellation Helmert, iterated/uniterated VCE, screening of bad satellites)
  - Clock and bias combination concept (system time scale, GLONASS handling)
- Tools and processes
  - Design and implementation
  - Timeline
  - Responsibilities

# Task force

- Rationale
  - Multi-GNSS product combination is a need & responsibility across multiple IGS entities
  - Need to move forward without further delays
- Proposal
  - Establish multi-GNSS product combination task force integrating experts, volunteers, stakeholders from IGS community and selected externals
  - Can be coordinated by MGWG Chair or other lead
- Tasks
  - Assessment and review of multi-GNSS product quality
  - Requirements analysis for combination tools
  - Tool chain definition and implementation
  - Setup of operational process chain

# Satellite Metadata File

Peter Steigenberger, Oliver Montenbruck



## Satellite Metadata

- Satellite metadata essential for GNSS data processing
  - Unique identifier: SVN, NORADID, COSPAR ID
  - Satellite mass
  - Center of mass
  - Sensor eccentricities (navigation payload antennas, laser retroreflector arrays)
  - ...
- “IGS White Paper on Satellite and Operations Information for Generation of Precise GNSS Orbit and Clock Products” published in 2017, updated in 2020
- Publications of satellite metadata by system providers (e.g., Galileo, QZSS) and manufacturers (e.g., Lockheed Martin for GPS III)
- IGS satellite metadata file as centralized interface

# Satellite Metadata File

- Maintained by DLR/GSOC, available at [https://files.igs.org/pub/station/general/igs\\_satellite\\_metadata.snx](https://files.igs.org/pub/station/general/igs_satellite_metadata.snx)
- SINEX style format, examples available at [MGEX website](#)

Name	Description
SATELLITE/IDENTIFIER	Satellite designations (static)
SATELLITE/PRN	PRN assignment
SATELLITE/FREQUENCY_CHANNEL	GLONASS frequency channel
SATELLITE/MASS	Spacecraft mass
SATELLITE/CENTER_OF_MASS	Center-of-mass position
SATELLITE/ECCENTRICITY	Equipment positions
SATELLITE/TX_POWER	Transmit power

```

+SATELLITE/MASS
*
*SVN_ Valid_From_____ Valid_To_____ Mass_[kg]
*
E223 2021:339:00000 0000:000:00000 716.376
E224 2021:339:00000 0000:000:00000 713.182
...
J004 2021:009:82121 2021:191:38791 2297.000
J004 2021:191:38791 2022:005:64638 2287.000
J004 2022:005:64638 0000:000:00000 2278.000

```

## Discussion

- Draft format description distributed to WG members and available on IGS website
- Recommendation: Approval of format description by GB
- Possible extensions:
  - Active clock (already included in draft but no data yet)
  - **BAND\_POWER** and **SIGNAL\_POWER** blocks
    - already included in draft but no data yet
    - Information might be incomplete, no replacement of **TX\_POWER** block
  - Geometry and surface properties

## Resources

- [IGS Whitepaper Version 2017/07/25](#)
- [IGS Whitepaper Version 2020/02/04](#)
- [Galileo Satellite Metadata](#)
- [BeiDou Satellite Parameters](#)
- [GPS Technical References](#)
- [QZSS Satellite Information](#) (satellite property information and operational history information)



# GPS L5 Support

Oliver Montenbruck



## GPS L5 Support

- Growing number of L5-capable satellites, 24 satellites expected by 2027
- Aviation and spaceborne GNSS users (ESA!) moving to L1/E1+L1/E5a receivers
- Expected needs
  - ANTEX update for IIF satellites (add “tweaked” L5\* to obtain IF(L1,L5) from IF(L1/L2,L5\*))
  - Independent L1/L5 (phase) clock product
  - L5 phase biases
- Can IGS support these users (and does it want to)?

# Multi-GNSS Working Group Recommendations



## Recommendations

- Relocate all MGEX products to standard IGS products directory

Notes: currently products implementation by all DCs coordinated by DCC (Pat and Markus); target date for completion 30 Sep 2023; 2 months lead notice to all users via IGS mail

- Request GB approval for Satellite Metadata SINEX File Format and Product

Notes: standardized I/F for satellite metadata for ACs and IGS users, maintained by DLR/GSOC, prototype available from [files.igs.org/pub/station/general/](https://files.igs.org/pub/station/general/) or [igs.org/mgex](https://igs.org/mgex) since Jan 2021

- Establish a Task Force to define and implement a tool chain for multi-GNSS orbit/clock/(bias) combination and to establish an operational product.

Notes: cross-WG taskforce composed of invited specialists/volunteers/stakeholders

- Study options for supporting the GPS L1/L5 user community through dedicated IGS clock or bias products